


MIN / MAX - CURVA IP67



datasheet

MIN / MAX Curva is a linear, curved IP67-rated LED luminaire for flush installation on floors in indoor or outdoor areas. It is available in 6 different curvatures with antislip or sandblasted glass. Driveover rated up to 11,000 lbs. Pressure switch on request. Can be ordered in IP68 stainless steel version suitable for fountains - see Fountain Lighting section.

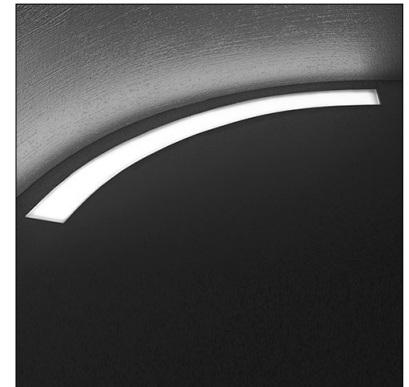

Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage / Input	20W
Power Supply	Remote, not included. Consult Factory.
Construction	Body: Anticorodal Aluminum Protected by 25 Micron Lens: Extra Clear Tempered Glass Cable Length: 1.64'
CCT	2700K, 3000K, 4000K (RGBW or Tunable White on request)
BUG Rating	Coming Soon
Delivered Lumens	1520-1760 lm (3000K)
Efficacy	76-88 lm/W (3000K)
Optics	Diffuse
Finishes	Antislip or Sandblasted Glass
Fixture Dimensions	46.4" l x 3.94" w x 1.57" h (various curvatures)
Color Consistency	3-Step MacAdam
IP Rating	IP67
Impact Resistance	IK10
Driveover Capacity	Up to 11,000 lbs



ORDERING INFORMATION


Example: LM07.104859.US.A1.DI.BP. Accessories / Power Supplies ordered separately.

<input type="text"/>	<input type="text"/>	DI	<input type="text"/>
Model No.	Finish	Optic	CCT
LM07.104857.US (CU1)	A1 - Antislip Glass	DI - Diffuse	BC - 2700K
LM07.104859.US (CU2)	60 - Sandblasted Glass		BP - 3000K
LM07.104861.US (CU3)			BF - 4000K
LM07.104865.US (CU4)			
LM07.104885.US (CU5)			
LM07.104887.US (CU6)			

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

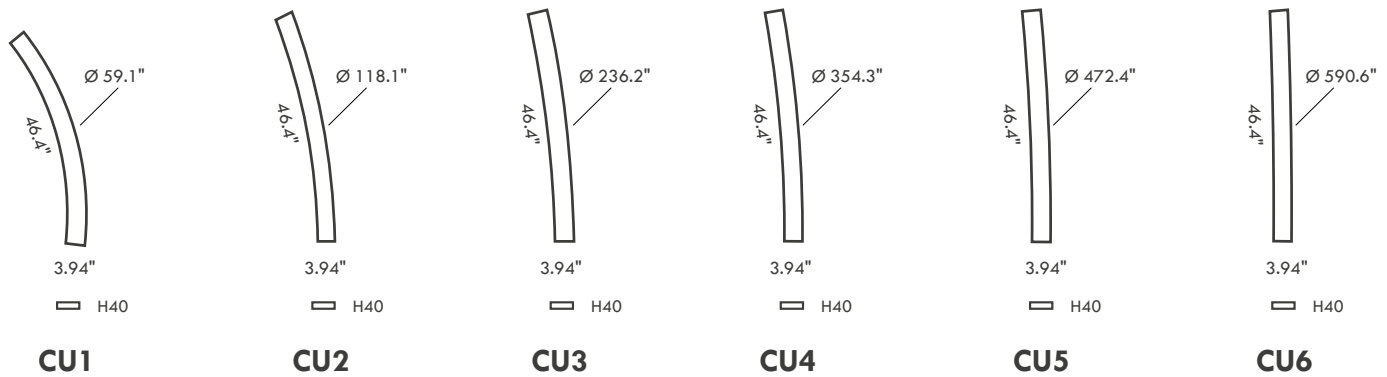

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures					
			CU1	CU2	CU3	CU4	CU5	CU6
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-4	1-4	1-4	1-4	1-4	1-4

For other power supply options consult factory.

ACCESSORIES - Installation



LM20.104865 (CU1 - IP67)
LM20.104867 (CU2 - IP67)
LM20.104869 (CU3 - IP67)
LM20.104871 (CU4 - IP67)
LM20.104880 (CU5 - IP67)
LM20.104882 (CU6 - IP67)
 IP67 Housing



LM20.104879
 Pair of Closing End caps



LM20.104464
 Light Source Extraction Tool Kit



LM20.104813
 Pair of joints for Curva to Curva continuous line

LM20.104873
 Pair of joints for Curva to Linea continuous line

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Job Name/Date:

Fixture Type Designation: