

# MIN / MAX - TRIANGOLO 2 IP67


MIN / MAX Triangolo 2 are triangular, IP67-rated LED luminaire for flush installation on floors in indoor or outdoor areas. Triangolo is available in 2 different triangle shapes - 5 sizes each with antislip or sandblasted glass. Driveover rated up to 11,000 lbs. Pressure switch on request. Can be ordered in IP68 stainless steel version suitable for fountains - see Fountain Lighting section.



Fixture Dimensions - See page 2

## TECHNICAL DATA

<b>Wattage / Input</b>	9.6W, 27W, 40W, 54W, 67W
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Anticorodal Aluminum Protected by 25 Micron Lens: Extra Clear Tempered Glass Cable Length: 1.64'
<b>CCT</b>	2700K, 3000K, 4000K (RGBW or Tunable White on request)
<b>BUG Rating</b>	B0-U0-G0
<b>Delivered Lumens</b>	1360-5600 lm (3000K)
<b>Efficacy</b>	83-92 lm/W (3000K)
<b>Optics</b>	Diffuse
<b>Finishes</b>	Antislip or Sandblasted Glass
<b>Fixture Dimensions</b> <i>(all are 1.6" h)</i>	9.8" x 9.8" x 15.9" (T6) 19.7" x 19.7" x 31.9" (T7) 29.5" x 29.5" x 47.3" (T8) 39.4" x 39.4" x 63.8" (T9) 49.2" x 49.2" x 79.7" (T10)
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP67
<b>Impact Resistance</b>	IK10
<b>Driveover Capacity</b>	Up to 11,000 lbs

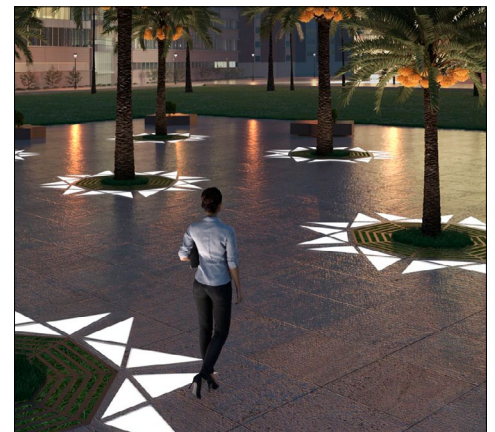

## ORDERING INFORMATION


Example: LM07.103826.A1.DI.BP.US. Accessories / Power supplies sold separately.

<input type="text"/>	<input type="text"/>	<input type="text" value="DI"/>	<input type="text"/>
<b>Model No.</b>	<b>Finish</b>	<b>Optic</b>	<b>CCT</b>
LM07.103826.US (T6 - 9.6W)	A1 - Antislip Glass	DI - Diffuse	BC - 2700K
LM07.103827.US (T7 - 27W)	60 - Sandblasted Glass		BP - 3000K
LM07.103828.US (T8 - 40W)			BF - 4000K
LM07.103887.US (T9 - 54W)			
LM07.103888.US (T10 - 67W)			

Job Name/Date:

Fixture Type Designation:

## FIXTURE DIMENSIONS

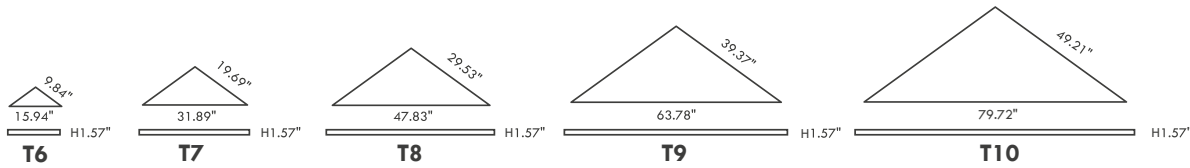

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures				
			T6	T7	T8	T9	T10
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-8	1-2	1-2	1-1	1-1

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES - Installation



H 3.94"



**LM20.103947** (T6 - 10.2" x 16.3" x 3.9" h)  
**LM20.103948** (T7 - 20.0" x 32.2" x 3.9" h)  
**LM20.103949** (T8 - 29.8" x 48.1" x 3.9" h)  
**LM20.103950** (T9 - 39.7" x 64.1" x 3.9" h)  
**LM20.103951** (T10 - 49.5" x 80.0" x 3.9" h)  
IP67 Housing


**LM20.104765**  
Light Source Extraction Tool Kit  
(For T1, T2, T6, T7)

**LM20.104812**  
Light Source Extraction Tool Kit  
(For T3, T4, T5, T8, T9, T10)

## PHOTOMETRIC DATA

### T1-T10

Maximum Candela = 268.3

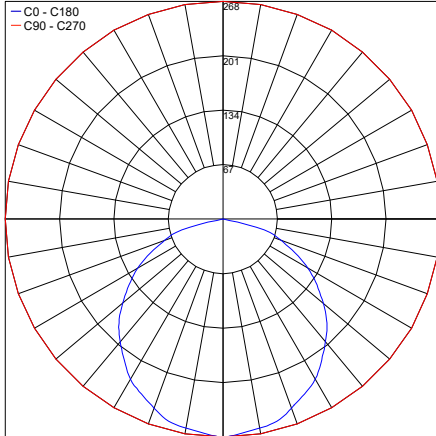

PHOTOMETRIC FILENAME : T1-T10-all the same.IES

Job Name/Date:

Fixture Type Designation: