



< **COLORADO 2.0**
3000K, 41W, 12°



RECESSED, WITH REBATED FRAME



COLORADO 1.0
41W
26.73"




COLORADO 1.1
62W
38.54"



COLORADO 1.2
83W
50.35"

RECESSED FLUSH, WITHOUT FRAME



COLORADO 2.0
41W
24.88"



COLORADO 2.1
62W
36.69"



COLORADO 2.2
83W
48.50"

SURFACE MOUNTED, WITH BRACKETS



COLORADO 3.0
41W
24.61"



COLORADO 3.1
62W
36.42"



COLORADO 3.2
83W
48.23"

OUTDOOR LINEAR PROFILES ARCHITECTURAL LIGHTING FOR FACADES UP TO 65.62' TALL



RGBW



COLORADO 4.0
43W
DMX, RDM
26.73"



RGBW



COLORADO 4.1
64W
DMX, RDM
38.54"




RGBW




COLORADO 4.2
85W
DMX, RDM
50.35"



COLORADO 5.0
43W
DMX, RDM
24.88"



COLORADO 5.1
64W
DMX, RDM
36.69"



COLORADO 5.2
85W
DMX, RDM
48.50"



COLORADO 6.0
43W
DMX, RDM
24.61"



COLORADO 6.1
64W
DMX, RDM
36.42"



COLORADO 6.2
85W
DMX, RDM
48.23"

12°

30°

45°

76°

15°x50°

diffuse



IP65 / IP67
SUITABLE FOR OUTDOOR APPLICATIONS



BUILT-IN PROTECTION SYSTEMS:
PID
PROTECTIVE IMPEDANCE DEVICE



BUILT-IN
POWER SUPPLY UNIT



COLORADO 1 / 2 / 3
AVAILABLE IN DALI AND
0/1-10V DIMMABLE VERSIONS



COLORADO 4 / 5 / 6
LIGHTING CONTROL USING
THE DMX RDM PROTOCOL

MAXIMUM RESISTANCE TO CORROSION
COLORADO IS SUITABLE FOR INSTALLATION IN HARSH
ENVIRONMENTS SUCH AS THE SALINE CONDITIONS FOUND IN
MARITIME AREAS: THE COMBINATION OF A BODY IN
ANTICORODAL® LOW-COPPER-CONTENT ALUMINUM AND CAPS
IN TECHNOPYLIMER ENSURES EXCELLENT HEAT DISSIPATION
AND OUTSTANDING CORROSION RESISTANCE



IK09 / IK10
LENS IN TRANSPARENT EXTRA-CLEAR GLASS, UP TO
0.39" THICK, HIGH TRANSMITTANCE




TO ENSURE CHROMATIC UNIFORMITY OF LIGHT,
SERIGRAPHED GREY (RAL 7015), AND TEMPERED
FOR EXCELLENT IMPACT AND SCRATCH RESISTANCE



COLORADO 1 / 4 DRIVE-OVER UP TO 4409.24 lbs
COLORADO 2 DRIVE-OVER UP TO 3306.93 lbs
COLORADO 5 DRIVE-OVER UP TO 3747.86 lbs

ANTI-GLARE RECESSED OPTICS
TO ENSURE VISUAL COMFORT

LIGHTING PERFORMANCE
A LUMINOUS FLUX OF OVER
5700 LM PER SQUARE METRE
MEANS FACADES AS TALL AS
65.6' CAN BE LIT



UNIQUE SELLING POINTS



AVAILABLE IN COLOR TEMPERATURES 2700K, 3000K AND 4000K, AND IN A WARM 2200K COLOR

to better respect the circadian cycles of people and animals in urban, green and public spaces



RGBW VERSION



IN/OUT CONNECTION

Easy wiring with quick connectors designed to connect the profiles in a line



COLORADO 3 / 6
THE BRACKET WITH TWO PIVOT POINTS ALLOWS THE LIGHT OUTPUT TO BE PRECISELY DIRECTED



ACCESSORY BRACKETS CAN BE ADJUSTED TO DIRECT THE LIGHT OUTPUT AS DESIRED

The fixture can be spaced up to 10.6" from the installation surface to reach past protruding architectural elements, such as cornices, corbels or cordons, and direct the light output where it is needed





COLORADO 1 / 2 / 3
ANTI-GLARE ACCESSORIES. THE HONEYCOMB LOUVRE OR ANTI-GLARE SHIELD, WHICH CAN BE ORDERED AT THE SAME TIME AS THE FIXTURE, IS MOUNTED ON THE OPTICAL UNIT, SO THAT THE CHOSEN OPTION TILTS TOGETHER WITH THE OPTICS IN THE RECESSED VERSION



COLORADO 1 / 2
TILTING SYSTEM INSIDE THE OPTICAL UNIT

The light direction can be altered by +/- 20° externally with a simple adjustment on the end caps, without compromising the fixture's IP65/IP67 protection level.

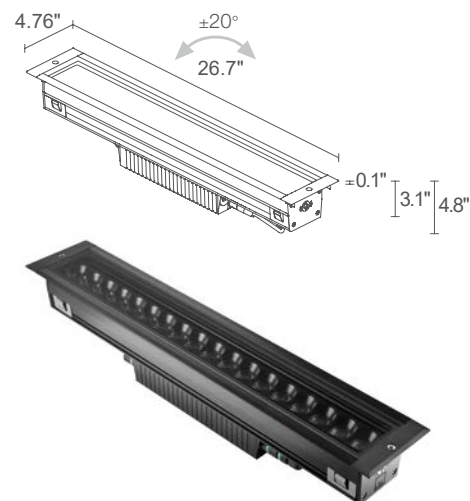


COLORADO 1.0

LED
 4409 lbs
 kN 20
 12.35 lbs
 IP65
 IP67
 IK10
 AA
 PID
 T max 40°C

POWER / MODEL CODE	41W 26.73" LED spacing 0.8" CA10100 ■ 0 ■ 0 ■ N Anodized black
■ CONTROL SYSTEM	0 - remote
■ OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with diffuse optics) 2 - anti-glare shield (not compatible with diffuse optics)
■ LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
■ OPTICS	S - 12° tiltable ±20° M - 30° tiltable ±20° L - 45° tiltable ±20° K - 76° tiltable ±20° W - 15°x50° tiltable ±20° D - diffuse tiltable ±20°

LUMEN OUTPUT AT SOURCE	4950 lm (3000K)
DELIVERED LUMEN OUTPUT	3643 lm (3000K, 12°)
NO. AND TYPE OF LED	18 high-power LEDs, LED spacing 0.8", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized anti-corodal aluminum lens in grey-serigraphed and transparent, tempered extra-clear glass; lens in grey-serigraphed, acid-etched, tempered extra-clear glass (diffuse version) caps in technopolymer
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	recessed (ground)
ACCESSORIES	see accessories page
FEATURES	optical accessories of honeycomb louvre and anti-glare shield built into the lighting fixture and tiltable together with the optics in/out connection and easy wiring with quick connectors designed to connect the profiles in a line
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request

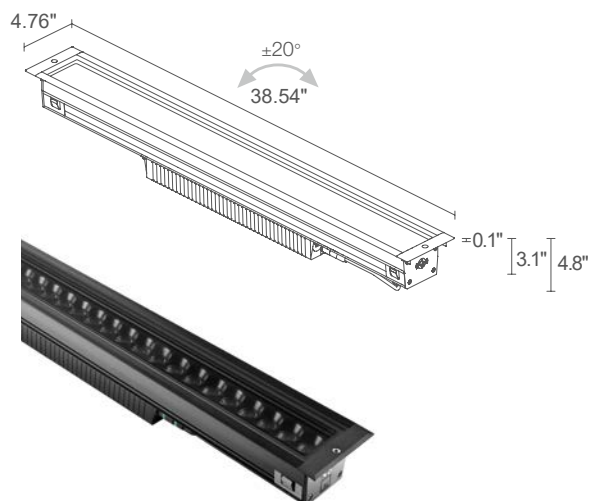

COLORADO 1.1

LED 4409 lbs kN 20 18.7 lbs IP65 IP67 IK10
PID T max 40°C

62W 38.54" LED spacing 0.8"

CA11100 0 0 0 N Anodized black

0 - remote
0 - none 1 - honeycomb louvre (not compatible with diffuse optics) 2 - anti-glare shield (not compatible with diffuse optics)
N - 2200K F - 2700K 5 - 3000K 9 - 4000K
S - 12° tiltable ±20° M - 30° tiltable ±20° L - 45° tiltable ±20° K - 76° tiltable ±20° W - 15°x50° tiltable ±20° D - diffuse tiltable ±20°

7425 lm (3000K)

5645 lm (3000K, 12°)

27 high-power LEDs, LED spacing 0.8", 2-step MacAdam, 60000h L80 B10 (Ta 25°C)
2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)

body in black-anodized anticorodal aluminum
lens in grey-serigraphed and transparent, tempered extra-clear glass; lens in grey-serigraphed, acid-etched, tempered extra-clear glass (diffuse version)
caps in technopolymer


remote power supply required, not included

recessed (ground)

see accessories page

optical accessories of honeycomb louvre and anti-glare shield built into the lighting fixture and tiltable together with the optics
in/out connection and easy wiring with quick connectors designed to connect the profiles in a line

Casambi-compatible version, controllable with the Casambi app, available on request

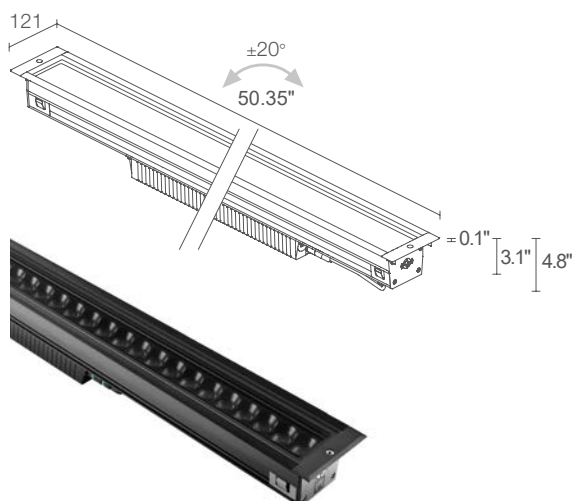

COLORADO 1.2

LED 4409 lbs kN 20 23.2 lbs IP65 IP67 IK10
PID T max 40°C

83W 50.35" LED spacing 0.8"

CA12100 0 0 0 N Anodized black

0 - remote
0 - none 1 - honeycomb louvre (not compatible with diffuse optics) 2 - anti-glare shield (not compatible with diffuse optics)
N - 2200K F - 2700K 5 - 3000K 9 - 4000K
S - 12° tiltable ±20° M - 30° tiltable ±20° L - 45° tiltable ±20° K - 76° tiltable ±20° W - 15°x50° tiltable ±20° D - diffuse tiltable ±20°

9900 lm (3000K)

7286 lm (3000K, 12°)

36 high-power LEDs, LED spacing 0.8", 2-step MacAdam, 60000h L80 B10 (Ta 25°C)
2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)

body in black-anodized anticorodal aluminum
lens in grey-serigraphed and transparent, tempered extra-clear glass; lens in grey-serigraphed, acid-etched, tempered extra-clear glass (diffuse version)
caps in technopolymer


remote power supply required, not included

recessed (ground)

see accessories page


optical accessories of honeycomb louvre and anti-glare shield built into the lighting fixture and tiltable together with the optics
in/out connection and easy wiring with quick connectors designed to connect the profiles in a line

Casambi-compatible version, controllable with the Casambi app, available on request



Anodized black

✓
COLORADO 2.0
 2200K, 41W, 12°

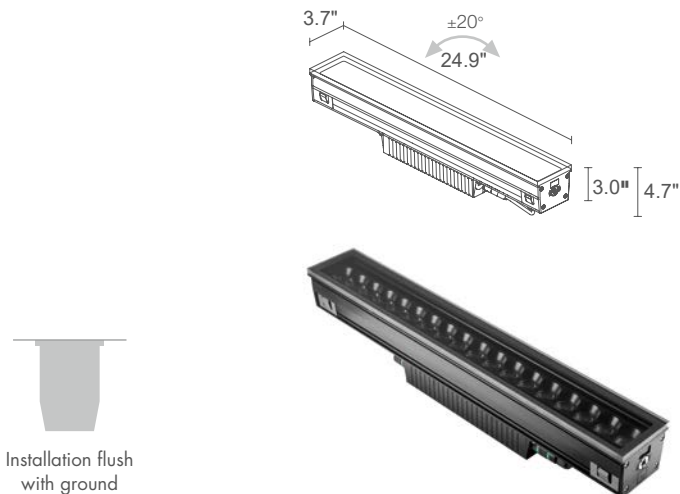


Installation flush
 with ground

COLORADO 2.0

LED 3307 lbs
 kN 15 13.2 lbs IP65 IP67 IK10
 PID T max 40°C

POWER / MODEL CODE	41W 24.88" LED spacing 0.8" CA20100 ■ 0 ■ 0 ■ 0 ■ V
CONTROL SYSTEM	0 - remote
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with diffuse optics) 2 - anti-glare shield (not compatible with diffuse optics)
LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 12° tiltable ±20° M - 30° tiltable ±20° L - 45° tiltable ±20° K - 76° tiltable ±20° W - 15°x50° tiltable ±20° D - diffuse tiltable ±20°

LUMEN OUTPUT AT SOURCE	4950 lm (3000K)
DELIVERED LUMEN OUTPUT	3643 lm (3000K, 12°)
NO. AND TYPE OF LED	18 high-power LEDs pitch 0.8", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)
MATERIAL	body in black-anodized anticorodal aluminum lens in grey-serigraphed and transparent, tempered extra-clear glass; lens in grey-serigraphed, acid-etched, tempered extra-clear glass (diffuse version) caps in technopolymer
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	recessed (ground)
ACCESSORIES	see accessories page
FEATURES	optical accessories of honeycomb louvre and anti-glare shield built into the lighting fixture and tiltable together with the optics in/out connection and easy wiring with quick connectors designed to connect the profiles in a line
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request

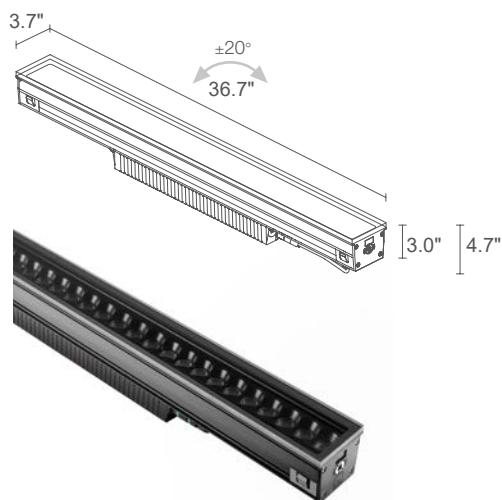

COLORADO 2.1

LED 3306 lbs kN 15 18.96 lbs IP65 IP67 IK10
PID T max 40°C

62W 36.69" LED spacing 0.8"
CA21100 ■ 0 ■ 0 ■ 0 ■ V

■	0 - on/off
■	0 - none 1 - honeycomb louvre (not compatible with diffuse optics) 2 - anti-glare shield (not compatible with diffuse optics)
■	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
■	S - 12° tiltable ±20° M - 30° tiltable ±20° L - 45° tiltable ±20° K - 76° tiltable ±20° W - 15°x50° tiltable ±20° D - diffuse tiltable ±20°

7425 lm (3000K)

5645 lm (3000K, 12°)

27 high-power LEDs, LED spacing 0.8", 2-step MacAdam, 60000h L80 B10 (Ta 25°C)
2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)

body in black-anodized anticorrosion aluminum
lens in grey-serigraphed and transparent, tempered extra-clear glass; lens in grey-serigraphed, acid-etched, tempered extra-clear glass (diffuse version)
caps in technopolymer


remote power supply required, not included

recessed (ground)

see accessories page

optical accessories of honeycomb louvre and anti-glare shield built into the lighting fixture and tiltable together with the optics
in/out connection and easy wiring with quick connectors designed to connect the profiles in a line

Casambi-compatible version, controllable with the Casambi app, available on request

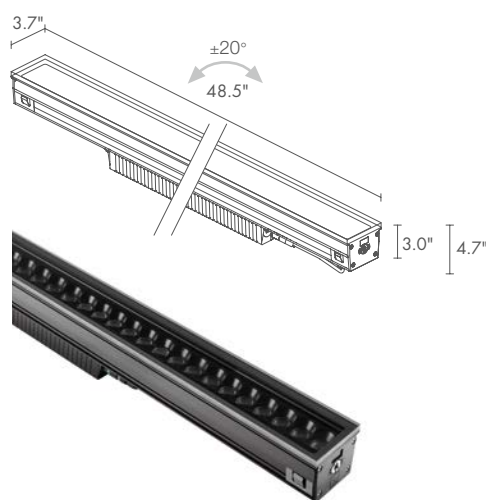

COLORADO 2.2

LED 3307 lbs kN 15 23.37 lbs IP65 IP67 IK10
PID T max 40°C

83W 48.50" LED spacing 0.8"
CA22100 ■ 0 ■ 0 ■ 0 ■ V

■	0 - on/off
■	0 - none 1 - honeycomb louvre (not compatible with diffuse optics) 2 - anti-glare shield (not compatible with diffuse optics)
■	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
■	S - 12° tiltable ±20° M - 30° tiltable ±20° L - 45° tiltable ±20° K - 76° tiltable ±20° W - 15°x50° tiltable ±20° D - diffuse tiltable ±20°

9900 lm (3000K)

7286 lm (3000K, 12°)

36 high-power LEDs, LED spacing 0.8", 2-step MacAdam, 60000h L80 B10 (Ta 25°C)
2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)

body in black-anodized anticorrosion aluminum
lens in grey-serigraphed and transparent, tempered extra-clear glass; lens in grey-serigraphed, acid-etched, tempered extra-clear glass (diffuse version)
caps in technopolymer


remote power supply required, not included

recessed (ground)


see accessories page

optical accessories of honeycomb louvre and anti-glare shield built into the lighting fixture and tiltable together with the optics
in/out connection and easy wiring with quick connectors designed to connect the profiles in a line

Casambi-compatible version, controllable with the Casambi app, available on request

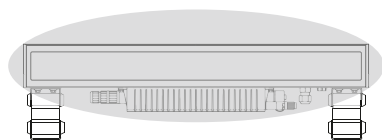

15°x50° optics

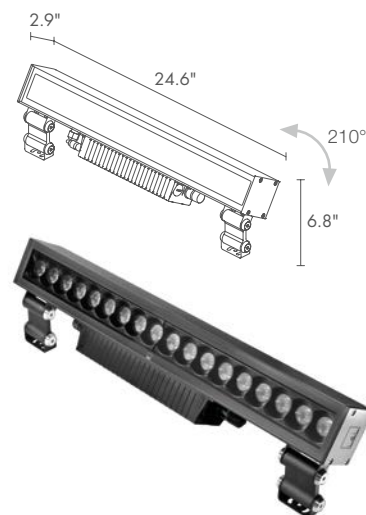

COLORADO 3.0

LED 12.8 lbs IP65 IP67 IK09
PID

POWER / MODEL CODE 41W 24.61" LED Spacing 0.8"
CA30100 **0** **0** **0** **N** Black

CONTROL SYSTEM **0** - on/off

OPTICAL ACCESSORIES **0** - none
1 - honeycomb louvre (not compatible with diffuse optics)
2 - anti-glare shield (not compatible with diffuse optics)

LED COLOR **N** - 2200K
F - 2700K
5 - 3000K
9 - 4000K

OPTICS **S** - 12°
M - 30°
L - 45°
K - 76°
W - 15°x50°
D - diffuse

LUMEN OUTPUT AT SOURCE 4950 lm (3000K)

DELIVERED LUMEN OUTPUT 3643 lm (3000K, 12°)

NO. AND TYPE OF LED 18 high-power LEDs, LED Spacing 0.8", 2-step MacAdam, 60000h L80 B10 (Ta 25°C)
2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)

MATERIAL body in anticorodal aluminum, bracket in stainless steel
lens in grey-serigraphed and transparent, tempered extra-clear glass; lens in grey-serigraphed, acid-etched, tempered extra-clear glass (diffuse version)
caps in technopolymer


POWER SUPPLY UNIT remote power supply required, not included

MOUNTING surface mounted (ceiling, wall, ground)

ACCESSORIES see accessories page

FEATURES optical accessories of honeycomb louvre and anti-glare shield built into the lighting fixture
two brackets with two pivot points for accurate adjustment

NOTES Casambi-compatible version, controllable with the Casambi app, available on request

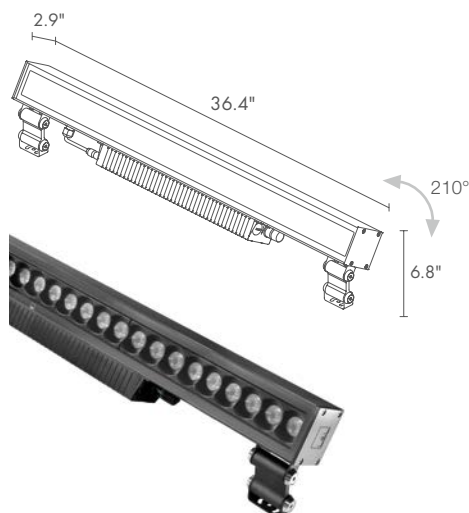

COLORADO 3.1

LED 18.3 lbs IP65 IP67 IK09
PID

62W 36.42" LED Spacing 0.8"
CA31100 ■ **O** ■ **O** ■ **N** Black

■	O - remote
■	O - none 1 - honeycomb louvre (not compatible with diffuse optics) 2 - anti-glare shield (not compatible with diffuse optics)
■	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
■	S - 12° M - 30° L - 45° K - 76° W - 15°x50° D - diffuse

7425 lm (3000K)

5645 lm (3000K, 12°)

27 high-power LEDs, LED Spacing 0.8", 2-step MacAdam, 60000h L80 B10 (Ta 25°C)
2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)

body in anticorodal aluminum, bracket in stainless steel
lens in grey-serigraphed and transparent, tempered extra-clear glass; lens in grey-serigraphed, acid-etched, tempered extra-clear glass (diffuse version)
caps in technopolymer


remote power supply required, not included

surface mounted (ceiling, wall, ground)

see accessories page

optical accessories of honeycomb louvre and anti-glare shield built into the lighting fixture
two brackets with two pivot points for accurate adjustment

Casambi-compatible version, controllable with the Casambi app, available on request

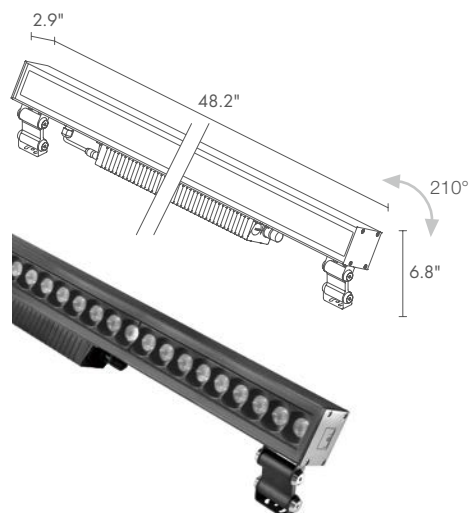

COLORADO 3.2

LED 22.1 lbs IP65 IP67 IK09
PID

83W 48.23" LED Spacing 0.8"
CA32100 ■ **O** ■ **O** ■ **N** Black

■	O - remote
■	O - none 1 - honeycomb louvre (not compatible with diffuse optics) 2 - anti-glare shield (not compatible with diffuse optics)
■	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
■	S - 12° M - 30° L - 45° K - 76° W - 15°x50° D - diffuse

9900 lm (3000K)

7286 lm (3000K, 12°)

36 high-power LEDs, LED Spacing 0.8", 2-step MacAdam, 60000h L80 B10 (Ta 25°C)
2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)

body in anticorodal aluminum, bracket in stainless steel
lens in grey-serigraphed and transparent, tempered extra-clear glass; lens in grey-serigraphed, acid-etched, tempered extra-clear glass (diffuse version)
caps in technopolymer

remote power supply required, not included

surface mounted (ceiling, wall, ground)


see accessories page

optical accessories of honeycomb louvre and anti-glare shield built into the lighting fixture
two brackets with two pivot points for accurate adjustment

Casambi-compatible version, controllable with the Casambi app, available on request



Black

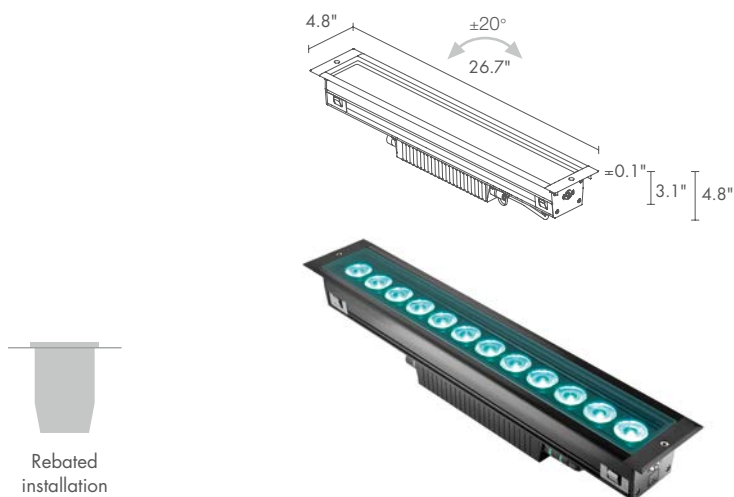

COLORADO 4.0





440° lbs
kN 20
  12.35 lbs

IP65 IP67 IK10 DMX RDM


 T max 40°C

POWER / MODEL CODE 43W 26.73" LED Spacing 0.8"
CA4010040070 ■ **N** Anodized black

OPTICS

S - 15° tiltable ±20°
M - 25° tiltable ±20°
L - 37° tiltable ±20°
W - 13°x65° tiltable ±20°

LED COLOR RGBW

LUMEN OUTPUT AT SOURCE R: 1337 lm G: 2880 lm B: 350 lm W: 2469 lm (3000K)

DELIVERED LUMEN OUTPUT 2547 lm
 R: 852 lm G: 1526 lm B: 360 lm W: 1836 lm (3000K, 15°)

NO. AND TYPE OF LED 12 multicolor high-intensity power LEDs spacing 0.8" 60000h L80 B10 (Ta 25° C)

MATERIAL body in black-anodized anticorodal aluminum
 lens in grey-serigraphed and transparent,
 tempered extra-clear glass
 caps in technopolymer


POWER SUPPLY UNIT remote power supply required, not included

MOUNTING recessed (ground)

ACCESSORIES see accessories page

FEATURES in/out connection and easy wiring with quick connectors designed to connect the profiles in a line

NOTES Casambi-compatible version, controllable with the Casambi app, available on request

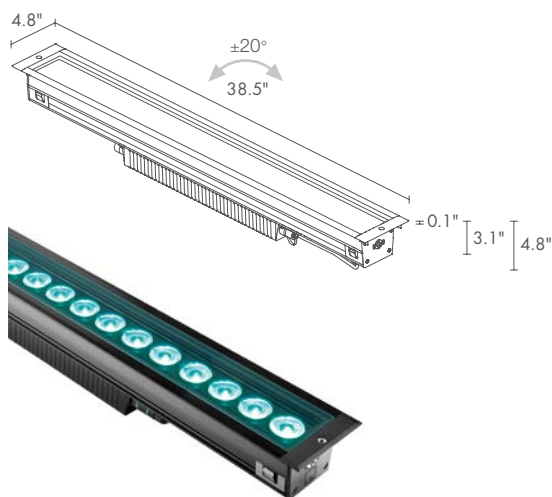

COLORADO 4.1

4409 lbs
kN 20
 18.7 lbs

IP65 IP67 IK10 DMX RDM

64W 38.5" LED Spacing 0.8"

CA4110040070 ■ **N** Anodized black

S - 15° tiltable ±20°
M - 25° tiltable ±20°
L - 37° tiltable ±20°
W - 13°x65° tiltable ±20°

RGBW

R: 2003 lm G: 4320 lm B: 525 lm W: 3703 lm (3000K)

3820 lm
R: 2003 lm G: 4320 lm B: 525 lm W: 3703 lm (3000K, 15°)

18 multicolor high-intensity power LEDs, LED Spacing 0.8" 60000h L80 B10 (Ta 25° C)

body in black-anodized anticorrosional aluminum
lens in grey-serigraphed and transparent,
tempered extra-clear glass
caps in technopolymer


remote power supply required, not included

recessed (ground)

see accessories page

in/out connection and easy wiring with quick connectors designed to connect the profiles in a line

Casambi-compatible version, controllable with the Casambi app, available on request

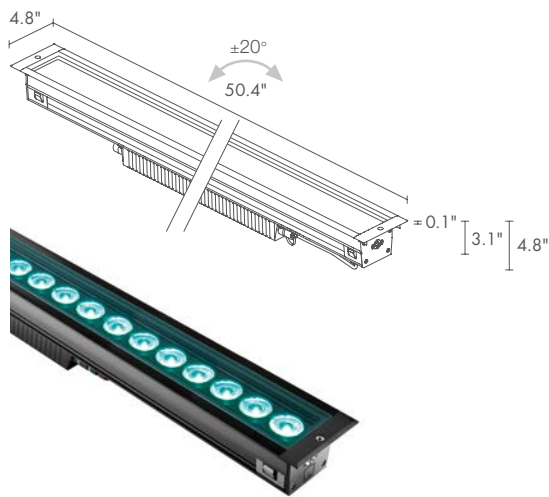

COLORADO 4.2

4409 lbs
kN 20
 23.15 lbs

IP65 IP67 IK10 DMX RDM

85W 50.35" LED spacing 0.8"

CA4210040070 ■ **N** Anodized black

S - 15° tiltable ±20°
M - 25° tiltable ±20°
L - 37° tiltable ±20°
W - 13°x65° tiltable ±20°

RGBW

R: 2674 lm G: 5760 lm B: 700 lm W: 4967 lm (3000K)

5104 lm
R: 2674 lm G: 5760 lm B: 700 lm W: 4967 lm (3000K, 15°)

24 multicolor high-intensity power LEDs, LED spacing 0.8" 60000h L80 B10 (Ta 25° C)

body in black-anodized anticorrosional aluminum
lens in grey-serigraphed and transparent,
tempered extra-clear glass
caps in technopolymer

remote power supply required, not included

recessed (ground)


see accessories page

in/out connection and easy wiring with quick connectors designed to connect the profiles in a line

Casambi-compatible version, controllable with the Casambi app, available on request



Anodized black

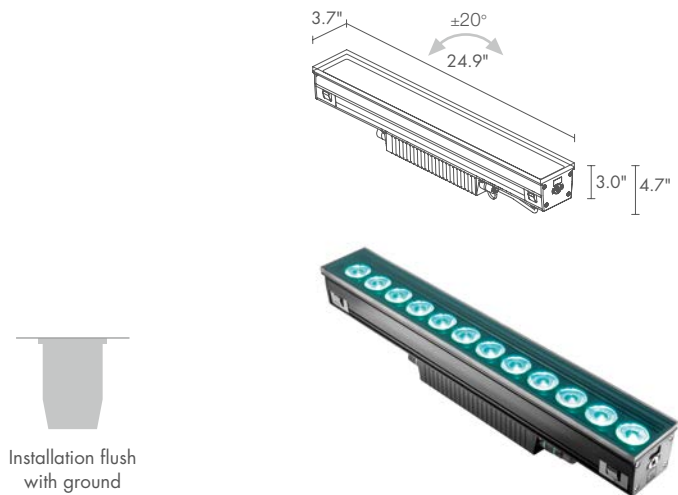

Installation flush
with ground

COLORADO 5.0




POWER / MODEL CODE 43W 24.88" LED Spacing 0.8"
CA5010040070 ■ V

OPTICS
S - 15° tiltable $\pm 20^\circ$
M - 25° tiltable $\pm 20^\circ$
L - 37° tiltable $\pm 20^\circ$
W - 13°x65° tiltable $\pm 20^\circ$

LED COLOR RGBW

LUMEN OUTPUT AT SOURCE	R: 1337 lm G: 2880 lm B: 350 lm W: 2469 lm (3000K)
DELIVERED LUMEN OUTPUT	2547 lm R: 852 lm G: 1526 lm B: 360 lm W: 1836 lm (3000K, 15°)
NO. AND TYPE OF LED	12 multicolor high-intensity power LEDs, LED spacing 0.8" 60000h L80 B10 (Ta 25° C)
MATERIAL	body in black-anodized anticorrosional aluminum lens in grey-serigraphed and transparent, tempered extra-clear glass caps in technopolymer
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	recessed (ground)
ACCESSORIES	see accessories page
FEATURES	in/out connection and easy wiring with quick connectors designed to connect the profiles in a line
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request

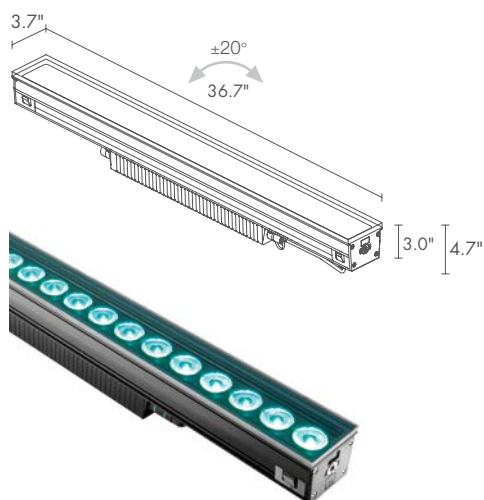

COLORADO 5.1

3748 lbs
kN 17

IP65 IP67 IK10 DMX RDM

64W 36.69" LED Spacing 0.8"
CA5110040070 ■ V

S - 15° tiltable ±20°
M - 25° tiltable ±20°
L - 37° tiltable ±20°
W - 13°x65° tiltable ±20°

RGBW

R: 2003 lm G: 4320 lm B: 525 lm W: 3703 lm
(3000K)

3820 lm
R: 2003 lm G: 4320 lm B: 525 lm W: 3703 lm
(3000K, 15°)

18 multicolor high-intensity power LEDs, LED Spacing 0.8"
60000h L80 B10 (Ta 25° C)

body in black-anodized anticorrosion aluminum
lens in grey-serigraphed and transparent,
tempered extra-clear glass
caps in technopolymer


remote power supply required, not included

recessed (ground)

see accessories page

in/out connection and easy wiring with quick
connectors designed to connect the profiles in a line

Casambi-compatible version, controllable
with the Casambi app, available on request

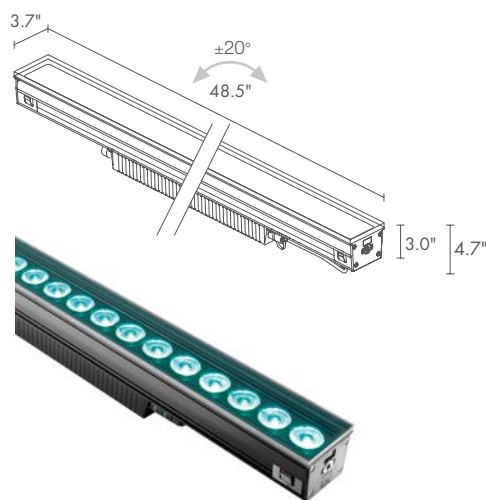

COLORADO 5.2

3748 lbs
kN 17

IP65 IP67 IK10 DMX RDM

85W 48.50" LED Spacing 0.8"
CA5210040070 ■ V

S - 15° tiltable ±20°
M - 25° tiltable ±20°
L - 37° tiltable ±20°
W - 13°x65° tiltable ±20°

RGBW

R: 2674 lm G: 5760 lm B: 700 lm W: 4967 lm
(3000K)

5104 lm
R: 2674 lm G: 5760 lm B: 700 lm W: 4967 lm
(3000K, 15°)

24 multicolor high-intensity power LEDs, LED Spacing 0.8"
60000h L80 B10 (Ta 25° C)

body in black-anodized anticorrosion aluminum
lens in grey-serigraphed and transparent,
tempered extra-clear glass
caps in technopolymer


remote power supply required, not included

recessed (ground)


see accessories page

in/out connection and easy wiring with quick
connectors designed to connect the profiles in a line


Casambi-compatible version, controllable
with the Casambi app, available on request

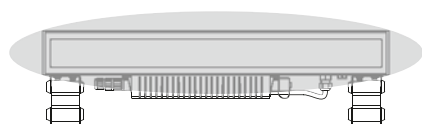



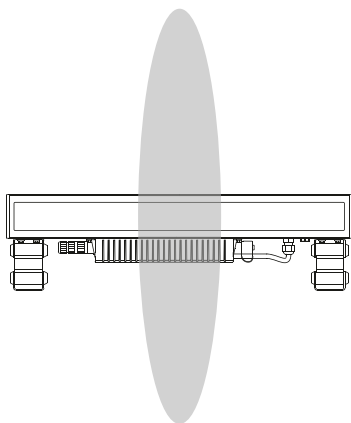

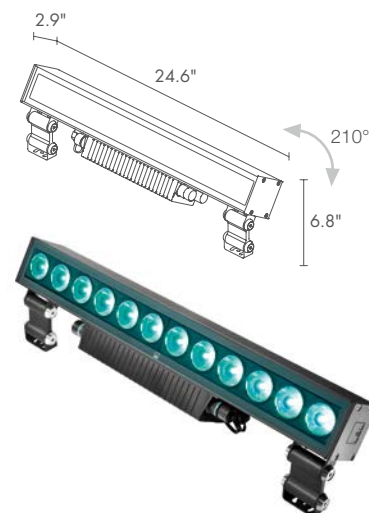

13°x65° optics



65°x13° optics



COLORADO 6.0




 12.8 lbs
 IP65 IP67 IK09 DMX RDM
 

POWER / MODEL CODE 43W 24.61" LED Spacing 0.8"
CA6010040070 ■ **N** Black

OPTICS
S - 15°
M - 25°
L - 37°
W - 13°x65°
X - 65°x13°

LED COLOR RGBW

LUMEN OUTPUT AT SOURCE R: 1337 lm G: 2880 lm B: 350 lm W: 2469 lm (3000K)

DELIVERED LUMEN OUTPUT 2547 lm
 R: 852 lm G: 1526 lm B: 360 lm W: 1836 lm (3000K, 15°)

NO. AND TYPE OF LED 12 multicolor high-intensity power LEDs, LED Spacing 0.8" 60000h L80 B10 (Ta 25° C)

MATERIAL body in anticorodal aluminum, bracket in stainless steel lens in grey-serigraphed and transparent, tempered extra-clear glass caps in technopolymer


POWER SUPPLY UNIT remote power supply required, not included

MOUNTING surface mounted (ceiling, wall, ground)

ACCESSORIES see accessories page

FEATURES two brackets with two pivot points for accurate adjustment

NOTES Casambi-compatible version, controllable with the Casambi app, available on request

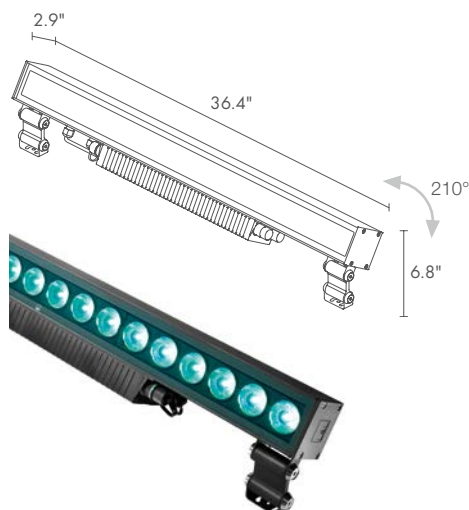


COLORADO 6.1

18.30 lbs
 IP65 IP67 IK09 DMX RDM

64W 36.42" LED spacing 0.8"
CA6110040070 ■ N Black

S - 15°
 M - 25°
 L - 37°
 W - 13°x65°
 X - 65°x13°

RGBW

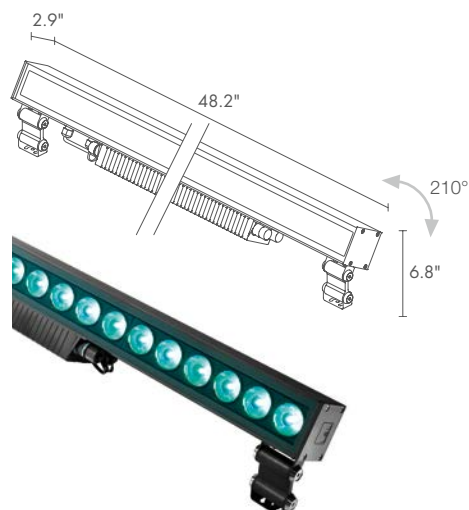

COLORADO 6.2

22.05 lbs
 IP65 IP67 IK09 DMX RDM

85W 48.23" LED Spacing 0.8"
CA6210040070 ■ N Black

S - 15°
 M - 25°
 L - 37°
 W - 13°x65°
 X - 65°x13°

RGBW

R: 2003 lm G: 4320 lm B: 525 lm W: 3703 lm (3000K)

3820 lm
 R: 2003 lm G: 4320 lm B: 525 lm W: 3703 lm
 (3000K, 15°)

18 multicolor high-intensity power LEDs, LED spacing 0.8" 60000h L80 B10 (Ta 25° C)

body in anticorodal aluminum, bracket in stainless steel
lens in grey-serigraphed and transparent, tempered
extra-clear glass
caps in technopolymer

remote power supply required, not included

surface mounted (ceiling, wall, ground)

see accessories page

two brackets with two pivot points for accurate adjustment

Casambi-compatible version, controllable with the Casambi app, available on request

R: 2674 lm G: 5760 lm B: 700 lm W: 4967 lm (3000K)

5104 lm
 R: 2674 lm G: 5760 lm B: 700 lm W: 4967 lm
 (3000K, 15°)

24 multicolor high-intensity power LEDs, LED spacing 0.8" 60000h L80 B10 (Ta 25° C)

body in anticorodal aluminium, bracket in stainless steel
screen in grey-serigraphed and transparent, tempered
extra-clear glass
caps in technopolymer

remote power supply required, not included

surface mounted (ceiling, wall, ground)

see accessories page

two brackets with two pivot points for accurate adjustment

Casambi-compatible version, controllable with the Casambi app, available on request



Black

ACCESSORIES FOR INSTALLATION



Outer casing



Outer casing

COLORADO 1.0 **WCCA10A0T** - 26.32"

COLORADO 1.1 **WCCA11A0T** - 38.13"

COLORADO 1.2 **WCCA12A0T** - 49.94"

COLORADO 2.0 **WCCA20A0F** - 25.06"

COLORADO 2.1 **WCCA21A0F** - 36.87"

COLORADO 2.2 **WCCA22A0F** - 48.68"

COLORADO 4.0 **WCCA10A0T** - 26.32"

COLORADO 4.1 **WCCA11A0T** - 38.13"


COLORADO 4.2 **WCCA12A0T** - 49.94"

COLORADO 5.0 **WCCA20A0F** - 25.06"

COLORADO 5.1 **WCCA21A0F** - 36.87"

COLORADO 5.2 **WCCA22A0F** - 48.68"

✓
COLORADO 5.0
RGBW, 43W, 37°

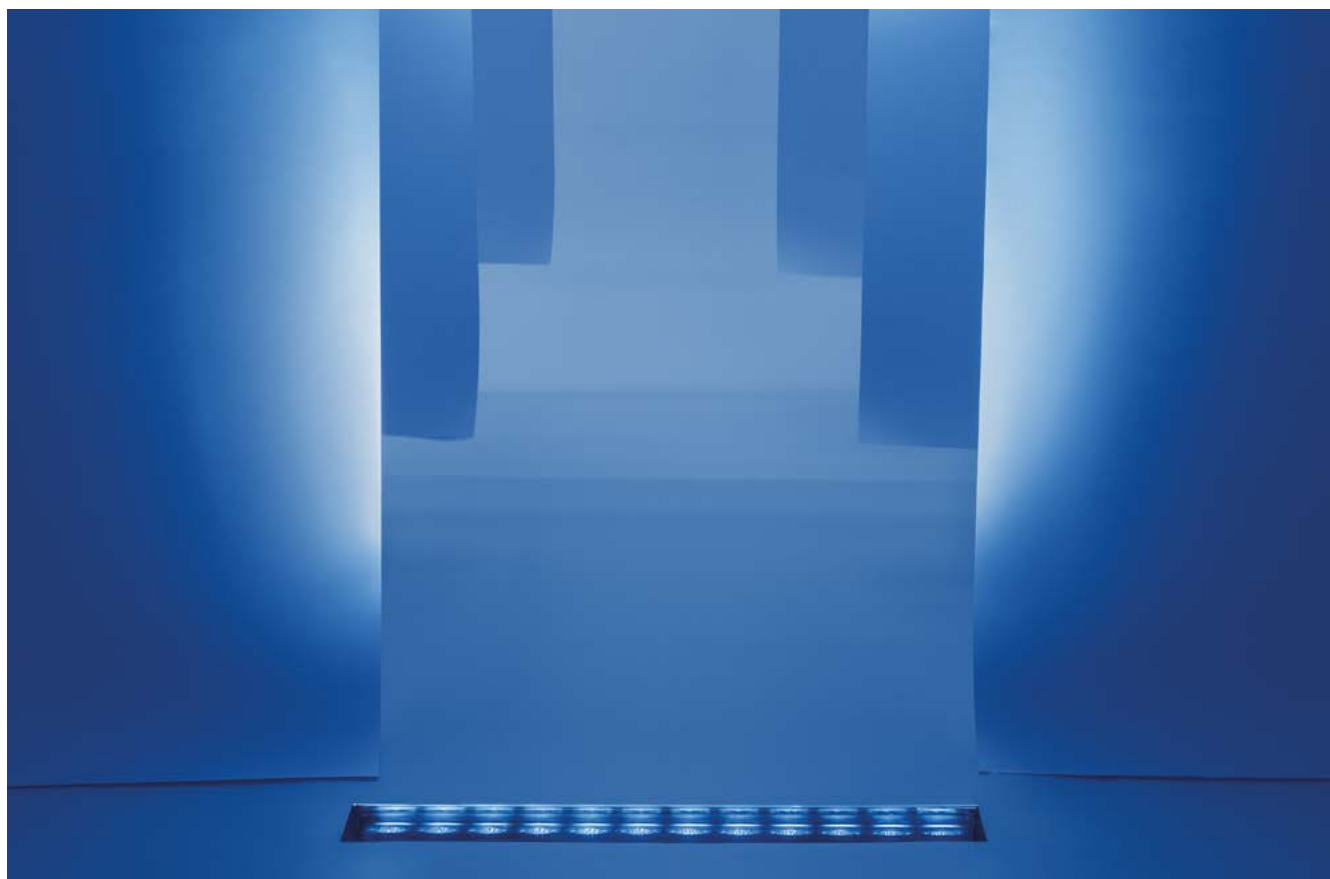

ACCESSORIES

ACCESSORIES FOR INSTALLATION



WMA04N

Brackets adjustable from 0 to 5.9"
(Colorado 3 / 6)



WFA05

5-pin male connector
for IP68 in/out connection



WFA0001

4.92 foot, 3-pin interconnect
cable for DMX version
(Colorado 4 / 5 / 6)



WFA0105

16.4 foot, 3-pin interconnect
cable for DMX signal
(Colorado 4 / 5 / 6)



WFA0201

16.40 foot, 5-pin interconnect cable
(Colorado 1 / 2 / 3)



WFA0205

16.40 foot, 5-pin interconnect cable
(Colorado 1 / 2 / 3)




OUTDOOR LINEAR PROFILES

COLORADO 1.0


2.0

3.0


S - 12° CRI 80

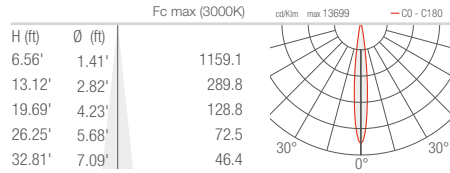


M - 30° CRI 80

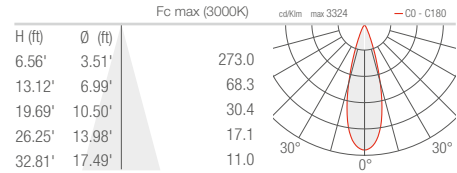


L - 45° CRI 80

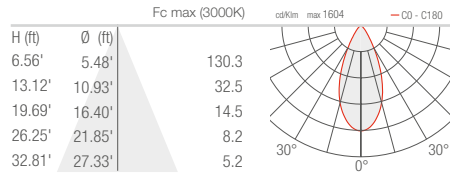


K - 76° CRI 80

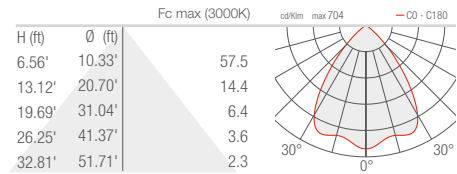

W - 15°x50° CRI 80

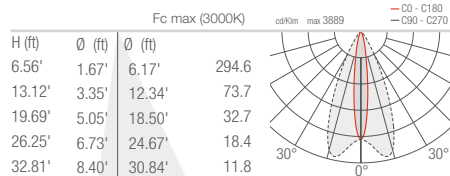

D - Diffuse CRI 80

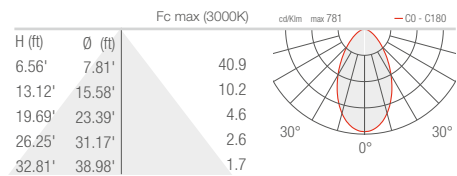


COLORADO 4.0


5.0

6.0


S - 15°

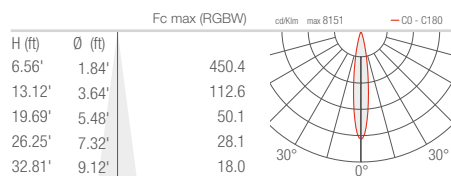


M - 25°

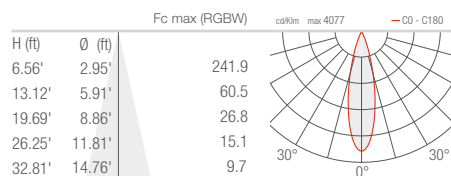


L - 37°

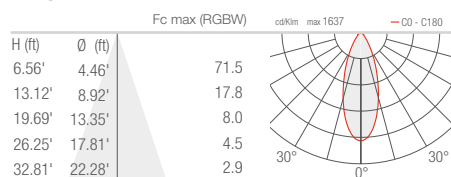

W - 13°x65°

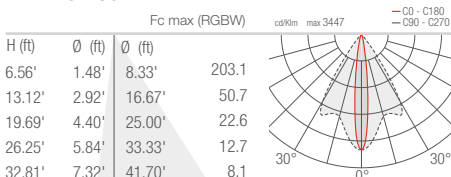

X - 65°x13° (Colorado 6.0)

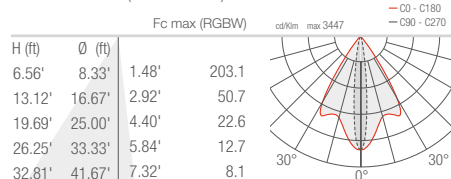

D - Diffuse

