


IDRIA is an LED bollard with a rectangular post and square head, made of Accoya®, a sustainable, highly durable wood treated with Acetylation treatment. It is available in 3 different heights with 8W total power and diffuse optics. 25 year warranty on Accoya® Wood - 5 year warranty on lighting element. Dark Sky compliant for output below 80°.



## TECHNICAL DATA

<b>Wattage</b>	8W
<b>Power Supply</b>	Remote 500mA, not included. See page 2
<b>Construction</b>	Body: Accoya® Wood and Inox AISI 316L Lens: Opal Polycarbonate
<b>CCT</b>	2700K, 3000K
<b>BUG Rating</b>	—
<b>CRI</b>	>90
<b>Delivered Lumens</b>	542 lm (3000K) Dark Sky compliant, output below 80°
<b>Efficacy</b>	68 lm/W
<b>Optics</b>	Diffuse
<b>Finishes</b>	Accoya® - Acetylation treatment, Clear or Gray
<b>Fixture Dimensions</b>	Pole: 23.6" / 35.4" / 47.2" h Head: 6.5" x 6.5" x 2.4" h
<b>Lumen Maintenance</b>	L70 >50,000hrs (Ta 40°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK08

Fixture Dimensions

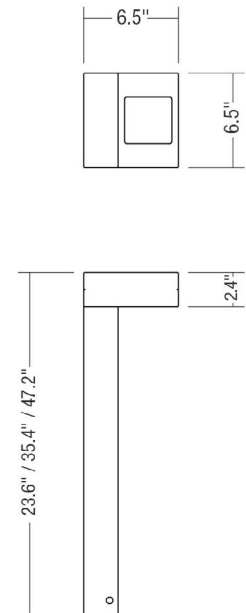

## ORDERING INFORMATION

Example: LNID80060DHBBZ3.US. Power Supply sold separately.

<b>LNID</b>		<b>D</b>		<b>BBZ</b>		<b>US</b>
<b>Model No.</b>	<b>Size</b>	<b>Optics</b>	<b>CCT</b>	<b>Power</b>	<b>Finish</b>	
LNID	80060 - 23.6" height 80090 - 35.4" height 80120 - 47.2" height	D - Diffuse	Y - 2700K H - 3000K	BBZ - Remote	3 - Accoya® Clear 4 - Accoya® Gray	US

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

500mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00466-P</a>		120-277VAC to 500mA, 10W, Class 2, DAMP	1-1
<a href="#">PPLT00469</a>	Phase Dim (120V only)	120VAC to 500mA, 14W, Class 2, IP66	1-2
<a href="#">PPLT00656-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2, IP20	1-3
<a href="#">PPLT00262</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	2-3
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-4
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-16

**Suggested Lutron Compatible**

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00259</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 14W, Class 2	1-1
<a href="#">PPLT00195</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	2-3
<a href="#">PPLT00676</a>	PEQE / PEQ3W	PEQ	100%-0.1%	Hi-Lume™ Premier 0.1% EcoSystem™ LED Driver	120-277VAC to 500mA, 20W, Class 2	1-3
<a href="#">PPLT00180</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	3-4

For other power supply options consult factory.

**ACCESSORIES - Installation**


(included)

Root Mounting Kit

Single Connection IP68

**PHOTOMETRIC DATA**

Note: All photometric data is 3000K

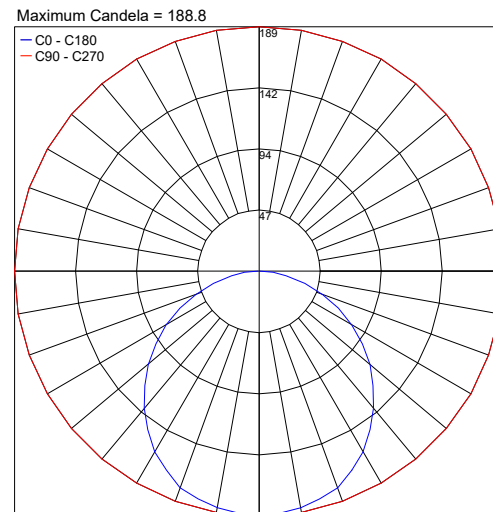

Job Name/Date:

Fixture Type Designation: