


Idria | 5.5W | diffuse | Bollards

23.62"

Technical Specifications

Source lamp	LED 5.5W
Total wattage	8W
Voltage	xxx VAC - 50/60 Hz
Control	On/Off
Luminous flux (*Source flux)	542 lm (759 lm*) @ 3000K
Luminous efficacy	68 lm/W @ 3000K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	65
IK rating	8



Materials


Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Accoya® - Acetylation treatment

Idria | 5.5W | diffuse | Bollards

35.43"

Technical Specifications

Source lamp	LED 5.5W
Total wattage	8W
Voltage	xxxVAC - 50/60 Hz
Control	On/Off
Luminous flux (*Source flux)	542 lm (759 lm*) @ 3000K
Luminous efficacy	68 lm/W @ 3000K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	65
IK rating	8



Materials


Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Accoya® - Acetylation treatment

Idria | 5.5W | diffuse | Bollards

47.24"

Technical Specifications


Source lamp	LED 5.5W
Total wattage	8W
Voltage	xxx VAC - 50/60 Hz
Control	On/Off
Luminous flux (*Source flux)	542 lm (759 lm*) @ 3000K
Luminous efficacy	68 lm/W @ 3000K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	65
IK rating	8




Materials

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Accoya® - Acetylation treatment

Isoplot

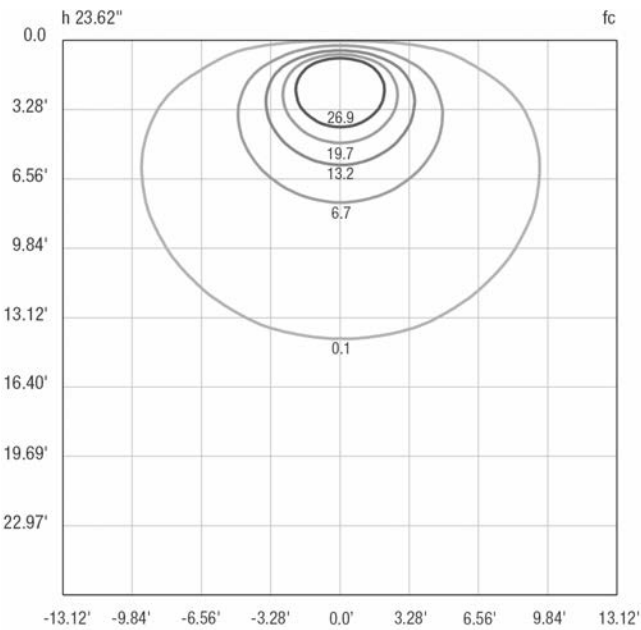

Photometry

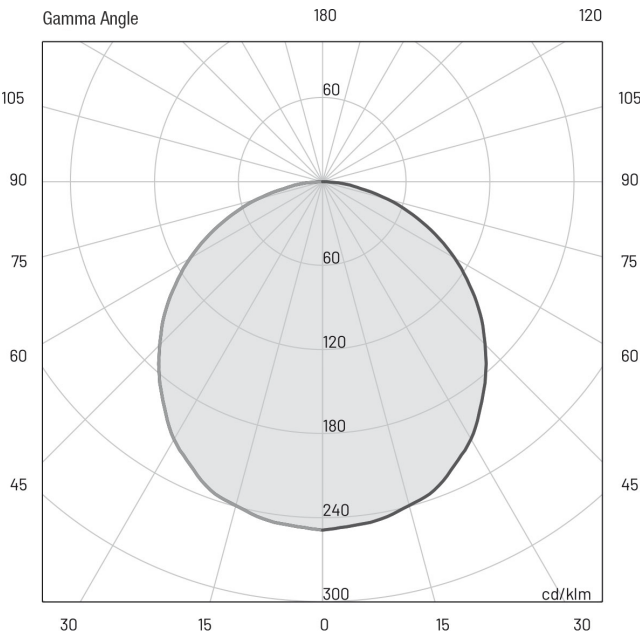

Included accessories

--	Root mounting kit
--	Single connection IP68

