


## Solisia 130 | 8W | diffuse | Bollards

13.78"

### Technical Specifications

<b>Source lamp</b>	LED 8W
<b>Total wattage</b>	10W
<b>Voltage</b>	24VDC - 50/60 Hz
<b>Control</b>	On/Off
<b>Luminous flux (*Source flux)</b>	470 lm (920 lm*) @ 3000K
<b>Luminous efficacy</b>	59 lm/W @ 3000K
<b>McADAM steps</b>	3
<b>Beam</b>	diffuse
<b>CRI</b>	>90
<b>Life time</b>	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
<b>IP rating</b>	65
<b>IK rating</b>	8

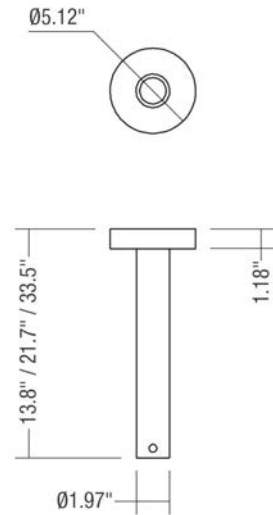

### Materials


<b>Body</b>	Accoya® wood and inox AISI 316L
<b>Diffuser</b>	Opal polycarbonate
<b>Finishing</b>	Accoya® - Acetylation treatment

## Solisia 130 | 8W | diffuse | Bollards

21.65"

### Technical Specifications

<b>Source lamp</b>	LED 8W
<b>Total wattage</b>	10W
<b>Voltage</b>	24VDC - 50/60 Hz
<b>Control</b>	On/Off
<b>Luminous flux (*Source flux)</b>	470 lm (920 lm*) @ 3000K
<b>Luminous efficacy</b>	59 lm/W @ 3000K
<b>McADAM steps</b>	3
<b>Beam</b>	diffuse
<b>CRI</b>	>90
<b>Life time</b>	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
<b>IP rating</b>	65
<b>IK rating</b>	8

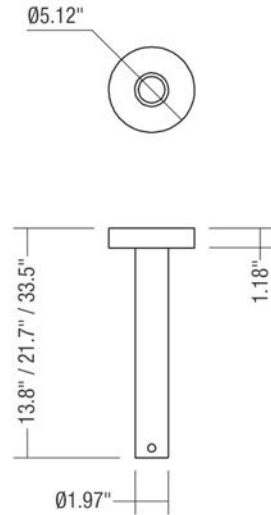

### Materials


<b>Body</b>	Accoya® wood and inox AISI 316L
<b>Diffuser</b>	Opal polycarbonate
<b>Finishing</b>	Accoya® - Acetylation treatment

## Solisia 130 | 8W | diffuse | Bollards

33.46"

### Technical Specifications


Source lamp	LED 8W
Total wattage	10W
Voltage	24VDC - 50/60 Hz
Control	On/Off
Luminous flux (*Source flux)	470 lm (920 lm*) @ 3000K
Luminous efficacy	59 lm/W @ 3000K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	65
IK rating	8

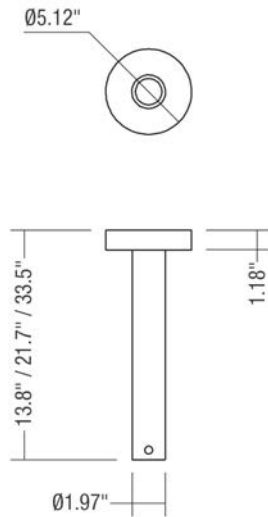


### Materials

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Accoya® - Acetylation treatment

## Isoplot

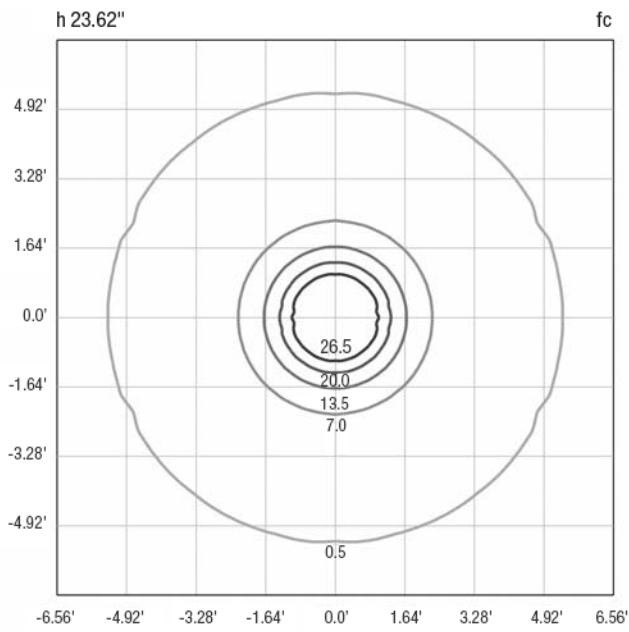

## Photometry

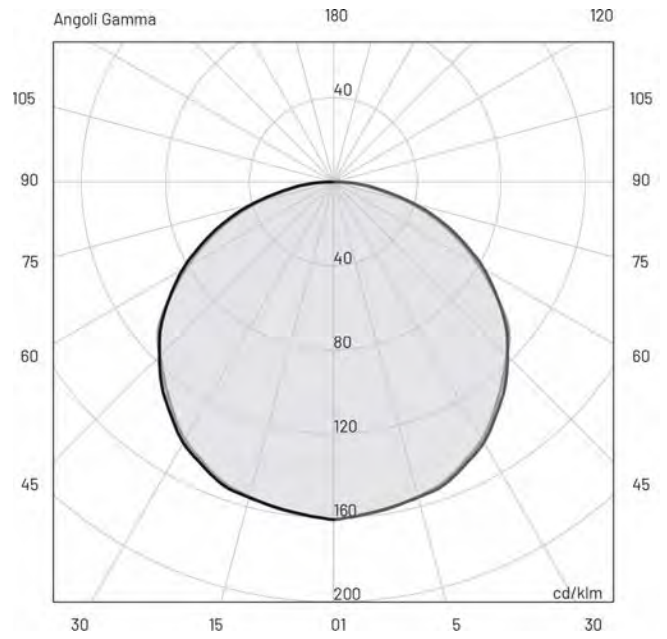

## Included accessories

- Root mounting kit
- Single connection IP68

designplan® 