
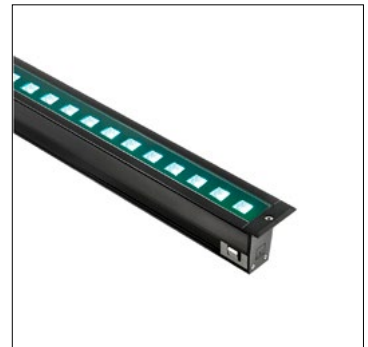


TAGO 4.0, 4.1, 4.3

Tago is a linear profile suitable for architectural lighting of facades of historic and public buildings, hotels and residential exteriors. Each is available in 3 lengths with a wide range of optics and color temperatures. Tago 4 series is recessed RGBW version with trim for floors, ceilings and walls, that comes with Integral DMX512 decoder with RDM. Requires a DMX/RDM controller provided by others.

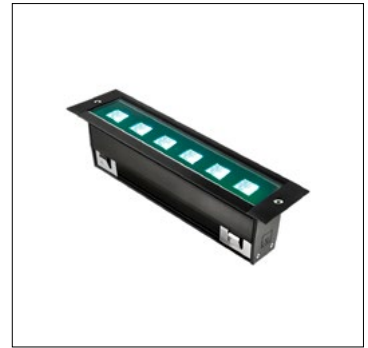

TECHNICAL DATA

Wattage / Input	14W, 24W, 49W (48VDC)
Power Supply	Integral 120-277VAC Comes with Integral DMX512 Decoder with RDM Requires a DMX/RDM Controller (by others)
Construction	Body: Black, Anodized, Anticorodal Aluminum Caps: Technopolymer Lens: Tempered Extra-Clear Glass Cable Length: 4.92'
CCT	RGBW
CRI	—
BUG Rating	B1-U1-G0 (Tago 4.0 - 30°) B2-U1-G0 (Tago 4.1 - 30°) B3-U1-G0 (Tago 4.3 - 30°)
Delivered Lumens	See Chart on page 2
Efficacy	See Chart on page 2
Optics	24°, 30°, 52°
Finishes	Anodized Black (4 Stage Marine Grade Finish)
Fixture Dimensions	See Chart on page 2.
Fixture Weight	See Chart on page 2
LED Source	See Chart on page 2
Lumen Maintenance	L80, B10>60,000hrs
Operating Temp.	-4°F to +113°F
IP Rating	IP65, IP67, IP69
Impact Rating	IK09

ORDERING INFORMATION

Example: TG4030040070SN. Accessories ordered separately.

	04	00	70		
Model No.	Control System	Accessories	CCT	Optics	Color
TG4030 - Tago 4.0 (14W)	04 - DMX512+RDM	00 - None	70 - RGBW	S - 24°	N - Anodized
TG4130 - Tago 4.1 (24W)				M - 30°	Black
TG4330 - Tago 4.3 (49W)				L - 52°	


Job Name/Date:

Fixture Type Designation:

TECHNICAL DATA

	TAGO 4.0	TAGO 4.1	TAGO 4.3
Wattage	14W	24W	49W
Delivered Lumens (3000K)	1374 lm - R: 90 lm G: 660 lm B: 132 lm W: 492 lm (4000K, 24°)	2748 lm - R: 180 lm G: 1320 lm B: 264 lm W: 984 lm (4000K, 24°)	5496 lm - R: 360 lm G: 2640 lm B: 528 lm W: 1968 lm (4000K, 24°)
Efficacy	98.1 lm/W	114.5 lm/W	112.2 lm/W
Fixture Dim. (l,w,h)	12.68" x 3.23" x 4.65"	22.52" x 3.23" x 4.65"	42.20" x 3.23" x 4.65"
Fixture Weight	4.9 lbs	7.1 lbs	11.7 lbs
LED Source	24 power LEDs, spacing 1.64"	48 power LEDs, spacing 1.64"	96 power LEDs, spacing 1.64"


FIXTURE DIMENSIONS

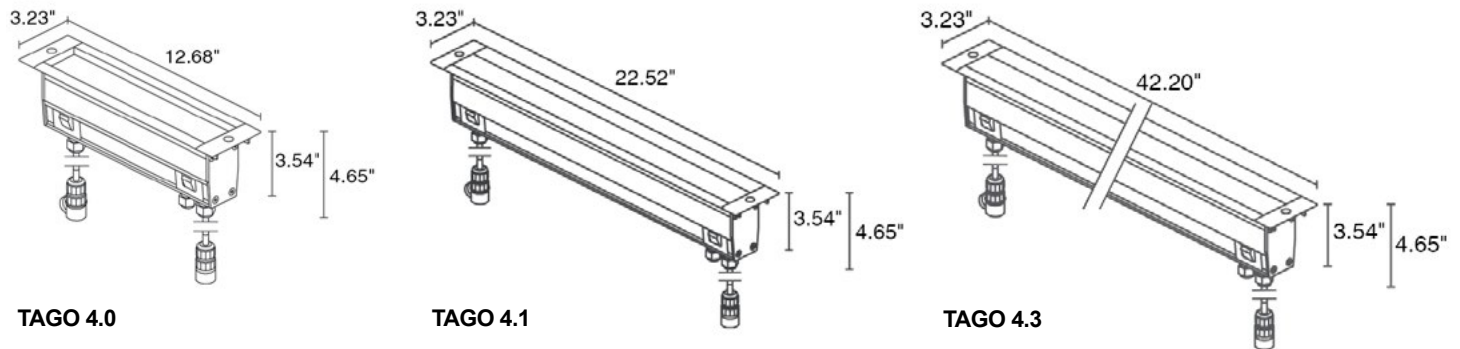


PHOTOMETRIC DATA

Note: all Photometry is 3000K


S - 24°

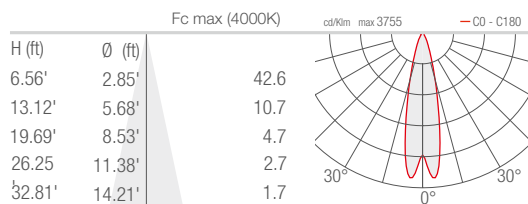

M - 30°

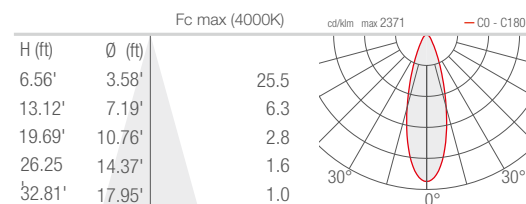


L - 52°

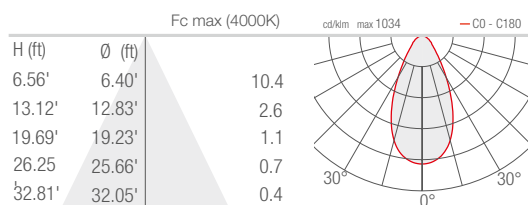

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

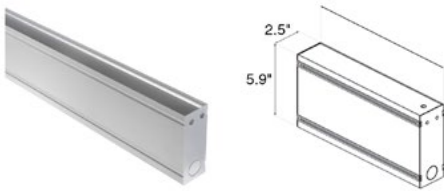

WCTG10A0T - Tago 4.0 (12.32")

WCTG11A0T - Tago 4.1 (22.17")

WCTG13A0T - Tago 4.3 (41.85")

Outer Casing

WIRING MATERIALS



WFA0105

16.40' 3-pin Interconnect Cable
*required when daisy-chaining fixtures
that are more than 4.9 ft apart*
For the DMX signal

***WFA04 & WFA0005
must be ordered together**



WFA0001

4.92' 3-Pin Interconnect Cable
*required when daisy-chaining fixtures
that are more than 4.9 ft apart*
For the DMX signal



WFA02 - Included

IP68 'H' Type Three-Way Connector
4-Pin (3.23" x 2.10" x 1.10")
For IP68 in/out connection



WFA03-US - Included

3-Pin Female Connector
For IP66-IP68 in/out connection



WFA04-US

3-Pin Male Connector
*required when daisy-chaining fixtures that
are more than 4.9 ft apart*
For IP66-IP68 in/out connection

Job Name/Date:

Fixture Type Designation: