

TAGO



Luce & Light

TAGO **DESIGNED TO BRING FACADES TO LIFE**

OUTDOOR LINEAR PROFILES





^
TAGO 2.0
3000K, 14W, 29°
with honeycomb louvre

TAGO



Tago is designed to provide architectural lighting for urban facades such as historic and public buildings, hotels and residential exteriors.

TAGO

MATERIALS

① TEMPERED EXTRA-CLEAR GLASS, UP TO 3.94" THICK, WITH GREY-VITRIFIED SERIGRAPHY, HIGH-TRANSMITTANCE TO ENSURE CHROMATIC HOMOGENEITY, AND EXCELLENT RESISTANCE TO KNOCKS AND SCRATCHES



② BODY MADE OF ANTICORODAL LOW-COPPER-CONTENT ALUMINUM EN AW 6060 T5 FOR EXCELLENT HEAT DISSIPATION, MANUFACTURED FROM AN EXTRUDED PROFILE AND SUBSEQUENTLY SUBJECTED TO A DEEP BLACK ELECTROCOLORING PROCESS OR PAINTED BLACK FOR EXCELLENT RESISTANCE TO CORROSION

③ ANTI-GLARE RECESSED OPTICS TO ENSURE VISUAL COMFORT



IN/OUT CONNECTION
Easy wiring with quick connectors designed to connect the profiles in a line in the dimmable versions.



BUILT-IN PROTECTION SYSTEMS:
IPS INTELLIGENT PROTECTION
SYSTEM PID PROTECTIVE IMPEDANCE
DEVICE



SUITABLE FOR OUTDOOR
APPLICATIONS



TAGO 1 / 2 / 4 / 5
DRIVE-OVER UP TO 4409.24 lbs



TAGO 1 / 2 / 3
AVAILABLE IN DALI AND
0-10V DIMMABLE VERSIONS



TAGO 4 / 5 / 6
LIGHTING CONTROLLED USING
THE DMX512+RDM PROTOCOL



TAGO 1 / 4
RECESSED WITH
REBATED FRAME




TAGO 2 / 5
RECESSED FLUSH,
WITHOUT FRAME



TAGO 3 / 6
SURFACE
MOUNTED WITH
BRACKET

TAGO

ADJUSTABILITY



TAGO 1 / 2
TILTING SYSTEM INSIDE THE OPTICAL UNIT. THE LIGHT DIRECTION CAN BE ALTERED BY +/- 20° EXTERNALLY WITH A SIMPLE ADJUSTMENT ON THE END CAPS, WITHOUT COMPROMISING THE FIXTURE'S IP65 AND IP67 PROTECTION LEVELS




TAGO 1 / 2 / 3
ANTI-GLARE ACCESSORIES. THE HONEYCOMB LOUVRE OR ANTI-GLARE SHIELD, WHICH CAN BE ORDERED AT THE SAME TIME AS THE FIXTURE, IS MOUNTED ON THE OPTICAL UNIT, SO THAT THE CHOSEN OPTION TILTS TOGETHER WITH THE OPTICS IN THE RECESSED VERSION



TAGO 3 / 6
THE BRACKET WITH TWO PIVOT POINTS ALLOWS THE LIGHT OUTPUT TO BE PRECISELY DIRECTED

TAGO


OPTICS

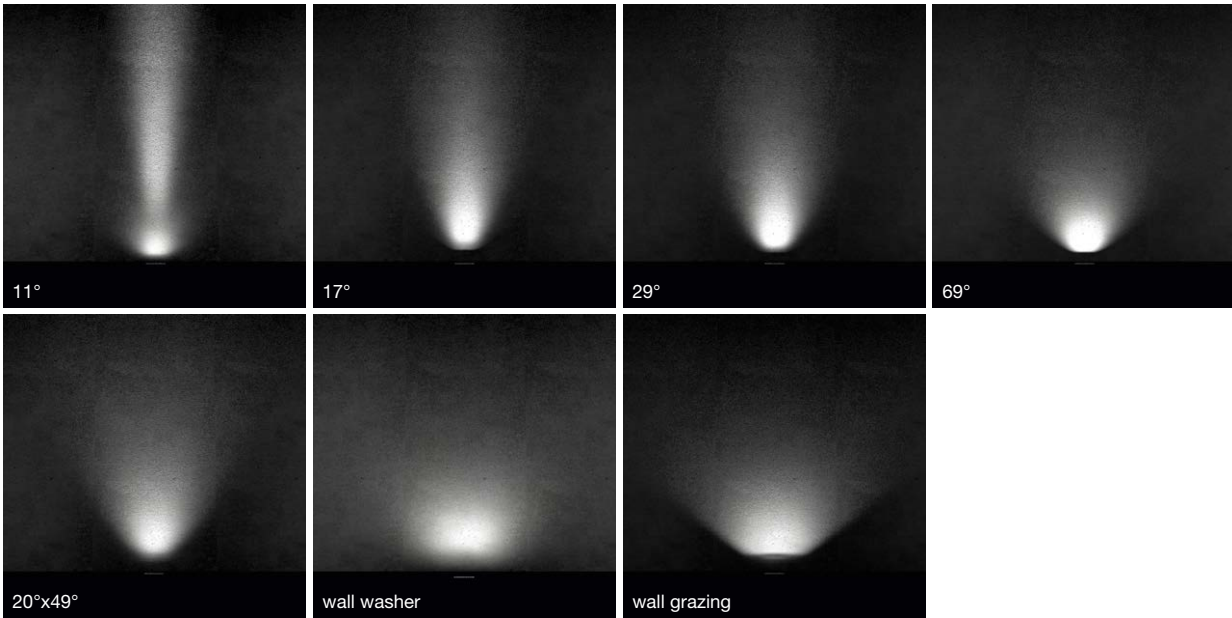

TAGO 1.0
PROFILE CENTRE DISTANCE FROM WALL, WALL WASHER OPTICS: 19.7",
OTHER OPTICS: 7.9"

TAGO

TONES OF LIGHT

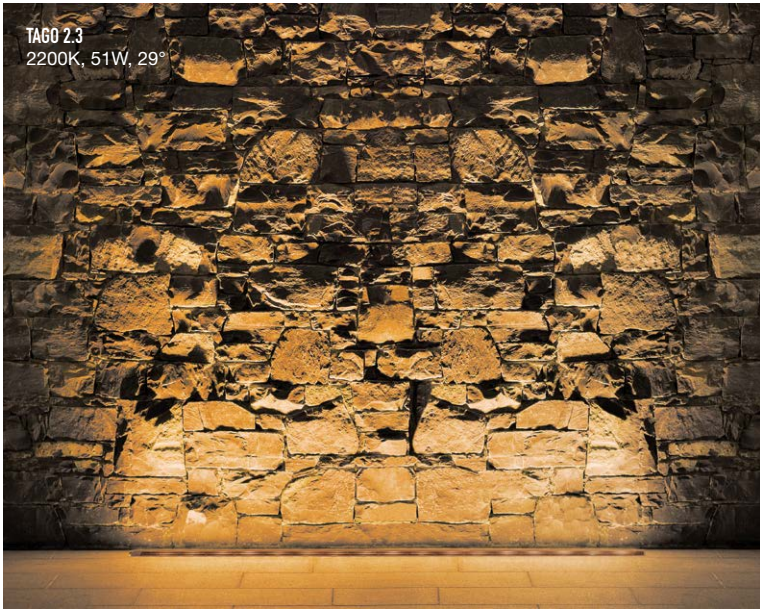


TAGO IS AVAILABLE WITH A 2200K WARM WHITE LIGHT.
THE USE OF WARM LIGHT SOURCES IN URBAN AND PUBLIC SETTINGS
RESPECTS THE CIRCADIAN CYCLES OF PEOPLE AND ANIMALS: EMISSIONS WITH
LONG WAVELENGTHS ARE COMPARABLE TO THE NATURAL LIGHT AT SUNSET.




RGBW VERSION >

TAGO

OUTDOOR LINEAR PROFILES



RECESSED, WITH REBATED FRAME



TAGO 1.0
14W 120-277VAC
ON/OFF, DALI, 0-10V
12.68"



TAGO 1.1
24W 120-277VAC
ON/OFF, DALI, 0-10V
22.52"



TAGO 1.3
51W 120-277VAC
ON/OFF, DALI, 0-10V
42.20"



TAGO 4.0
14W 48VDC
DMX512, RDM
12.68"




TAGO 4.1
24W 48VDC
DMX512, RDM
22.52"



TAGO 4.3
49W 48VDC
DMX512, RDM
42.20"

RECESSED FLUSH, WITHOUT FRAME



TAGO 2.0
14W 120-277VAC
ON/OFF, DALI, 0-10V
10.98"



TAGO 2.1
24W 120-277VAC
ON/OFF, DALI, 0-10V
20.83"



TAGO 2.3
51W 120-277VAC
ON/OFF, DALI, 0-10V
40.51"



TAGO 5.0
14W 48VDC
DMX512, RDM
10.98"



TAGO 5.1
24W 48VDC
DMX512, RDM
20.83"



TAGO 5.3
49W 48VDC
DMX512, RDM
40.51"

SURFACE MOUNTED, WITH BRACKETS



TAGO 3.0
14W 120-277VAC
ON/OFF, DALI, 0-10V
11.26"



TAGO 3.1
24W 120-277VAC
ON/OFF, DALI, 0-10V
21.10"



TAGO 3.3
51W 120-277VAC
ON/OFF, DALI, 0-10V
40.79"



TAGO 6.0
14W 48VDC
DMX512, RDM
11.26"



TAGO 6.1
24W 48VDC
DMX512, RDM
21.10"



TAGO 6.3
49W 48VDC
DMX512, RDM
40.79"

On/off version: 1 cable gland
DALI, 0–10V version:
3 cable glands, 2 connectors



LED TECH 2.92 lbs 4409.24 lbs IK09 IP65 IP67
IPS PID T max 104°F DALI 0-10V

POWER / MODEL CODE	14W 120-277VAC 12.68" LED spacing 0.79" TG10100 ■ 0 ■ 0 ■ 0 ■ N Anodized black
-----------------------	--

■ CONTROL SYSTEM	0 - on/off 2 - 0-10V D- DALI
■ OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
■ LED COLOR	N- 2200K F - 2700K 5 - 3000K 9 - 4000K
■ OPTICS	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°

LUMEN OUTPUT AT SOURCE	1492 lm (3000K)
DELIVERED LUMEN OUTPUT	932 lm (3000K, 29°)
NO. AND TYPE OF LED	12 SMD LED pitch 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 4.64 lbs 4409.24 lbs IK09 IP65 IP67
IPS PID T max 104°F DALI 0-10V

POWER / MODEL CODE	24W 120-277VAC 22.52" LED spacing 0.79" TG11100 ■ 0 ■ 0 ■ 0 ■ N Anodized black
-----------------------	--

0 - on/off 2 - 0-10V D- DALI	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
N- 2200K F - 2700K 5 - 3000K 9 - 4000K	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°

2984 lm (3000K)	1864 lm (3000K, 29°)
24 SMD LED pitch 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)	



LED TECH 9.00 lbs 4409.24 lbs IK09 IP65 IP67
IPS PID T max 104°F DALI 0-10V

POWER / MODEL CODE	51W 120-277VAC 42.20" LED spacing 0.79" TG13100 ■ 0 ■ 0 ■ 0 ■ N Anodized black
-----------------------	--

0 - on/off 2 - 0-10V D- DALI	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
N- 2200K F - 2700K 5 - 3000K 9 - 4000K	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°

5968 lm (3000K)	3728 lm (3000K, 29°)
48 SMD LED pitch 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)	

On/off version: 1 cable gland
DALI, 0–10V version:
3 cable glands, 2 connectors



LED TECH 2.56 lbs 4409.24 lbs IK09 IP65 IP67
IPS PID T max 104°F DALI 0-10V

POWER /
MODEL CODE 14W 120-277VAC 10.98" LED spacing 0.79"
TG20100 0 0 0 0 V

CONTROL SYSTEM	0 - on/off 2 - 0-10V D- DALI
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
LED COLOR	N- 2200K F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°

LUMEN OUTPUT
AT SOURCE 1492 lm (3000K)

DELIVERED LUMEN
OUTPUT 932 lm (3000K, 29°)

NO. AND TYPE OF LED 12 SMD LED spacing 0.79", 2-step MacAdam,
60000h L80 B10 (Ta 25°C)
2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 4.07 lbs 4409.24 lbs IK09 IP65 IP67
IPS PID T max 104°F DALI 0-10V

24W 120-277VAC 20.83" LED spacing 0.79"
TG21100 0 0 0 0 V

0 - on/off 2 - 0-10V D- DALI
0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
N- 2200K F - 2700K 5 - 3000K 9 - 4000K
S - 11° tiltable ±20° M - 17°tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°

2984 lm (3000K)

1864 lm (3000K, 29°)

24 SMD LED spacing 0.79", 2-step MacAdam,
60000h L80 B10 (Ta 25°C)
2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 8.06 lbs 4409.24 lbs IK09 IP65 IP67
IPS PID T max 104°F DALI 0-10V


51W 120-277VAC 40.51" LED spacing 0.79"
TG23100 0 0 0 0 V

0 - on/off 2 - 0-10V D- DALI
0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
N- 2200K F - 2700K 5 - 3000K 9 - 4000K
S - 11° tiltable ±20° M - 17° tiltable ±20° L - 29° tiltable ±20° K - 69° tiltable ±20° W - 20°x49° tiltable ±20° G - wall grazing tiltable ±20° A - wall washer tiltable ±20°

5968 lm (3000K)

3728 lm (3000K, 29°)

48 SMD LED spacing 0.79", 2-step MacAdam,
60000h L80 B10 (Ta 25°C)
2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



Optics 20°x49°

On/off version: 1 cable gland
DALI, 0–10V version:
3 cable glands, 2 connectors



LED TECH 2.39 lbs IK09 IP65 IP67 DALI 0-10V
IPS PID

POWER / MODEL CODE	14W 120-277VAC 11.26" LED spacing 0.79" TG30100 ■ 0 ■ 0 ■ 0 ■ N Black
■ CONTROL MANAGEMENT	0 - on/off 2 - 0-10V D - DALI
■ OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)
■ LED COLOR	N - 2200K F - 2700K 5 - 3000K 9 - 4000K
■ OPTICS	S - 11° M - 17° L - 29° K - 69° W - 20°x49° G - wall grazing A - wall washer
LUMEN OUTPUT AT SOURCE	1492 lm (3000K)
DELIVERED LUMEN OUTPUT	932 lm (3000K, 29°)
NO. AND TYPE OF LED	12 SMD LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)



LED TECH 4.15 lbs IK09 IP65 IP67 DALI 0-10V
IPS PID

POWER / MODEL CODE	24W 120-277VAC 21.10" LED spacing 0.79" TG31100 ■ 0 ■ 0 ■ 0 ■ N Black
0 - on/off 2 - 0-10V D - DALI	
0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)	
N - 2200K F - 2700K 5 - 3000K 9 - 4000K	
S - 11° M - 17° L - 29° K - 69° W - 20°x49° G - wall grazing A - wall washer	
2984 lm (3000K)	
1864 lm (3000K, 29°)	
24 SMD LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)	



LED TECH 7.94 lbs IK09 IP65 IP67 DALI 0-10V
IPS PID

POWER / MODEL CODE	51W 120-277VAC 40.79" LED spacing 0.79" TG33100 ■ 0 ■ 0 ■ 0 ■ N Nero/Black
0 - on/off 2 - 0/1-10V D - DALI	
0 - none 1 - honeycomb louvre (not compatible with 11°, 17°, wall grazing and wall washer optics) 2 - anti-glare shield (not compatible with 11°, wall grazing and wall washer optics)	
N - 2200K F - 2700K 5 - 3000K 9 - 4000K	
S - 11° M - 17° L - 29° K - 69° W - 20°x49° G - wall grazing A - wall washer	
5968 lm (3000K)	
3728 lm (3000K, 29°)	
48 SMD LED spacing 0.79", 2-step MacAdam, 60000h L80 B10 (Ta 25°C) 2200K: 3-step MacAdam, 60000h L80 B10 (Ta 25°C)	

TAGO 4.0



3 cable glands, 2 connectors

   4.85 lbs  4409.24 lbs


IK09 IP65 IP67 DMX512 RDM

POWER / MODEL CODE	14W 48VDC 12.68" LED spacing 1.61" TG4030040070  Anodized black
-----------------------	--

 OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	2070 lm R: 144 lm G: 948 lm B: 228 lm W: 750 lm (4000K)
DELIVERED LUMEN OUTPUT	1374 lm R: 90 lm G: 660 lm B: 132 lm W: 492 lm (4000K, 24°)
NO. AND TYPE OF LED	24 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 4.1

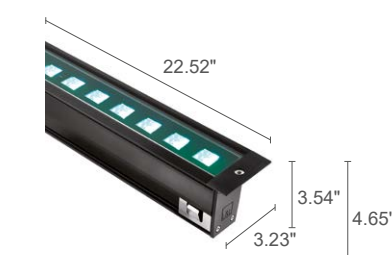

3 cable glands, 2 connectors

   120-277VAC  7.5 lbs 120-277VAC  7.05 lbs 48VDC  4409.24 lbs


IK09 IP65 IP67 DMX512 RDM

24W 48VDC 22.52" LED spacing 1.61" TG4130040070  N Anodized black
29W 120-277VAC 22.52" LED spacing 1.61" TG4110040070  N Anodized black

S - 24° M - 30° L - 52°
RGBW
4140 lm R: 288 lm G: 1896 lm B: 456 lm W: 1500 lm (4000K)
2748 lm R: 180 lm G: 1320 lm B: 264 lm W: 984 lm (4000K, 24°)
48 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 4.3

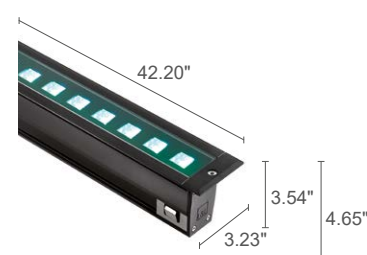

3 cable glands, 2 connectors

   120-277VAC  12.13 lbs 120-277VAC  11.68 lbs 48VDC  4409.24 lbs

IK09 IP65 IP67 DMX512 RDM

49W 48VDC 42.20" LED spacing 1.61" TG4330040070  N Anodized black
55W 120-277VAC 42.20" LED spacing 1.61" TG4310040070  N Anodized black

S - 24° M - 30° L - 52°
RGBW
8280 lm R: 576 lm G: 3792 lm B: 912 lm W: 3000 lm (4000K)
5496 lm R: 360 lm G: 2640 lm B: 528 lm W: 1968 lm (4000K, 24°)
96 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 5.0



3 cable glands, 2 connectors




4.63 lbs4409.24 lbs

IK09 IP65 IP67 DMX512 RDM



POWER / MODEL CODE	14W 48VDC 10.98" LED spacing 1.61"
	TG5030040070 ■ V
■ OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	2070 lm R: 144 lm G: 948 lm B: 228 lm W: 750 lm (4000K)
DELIVERED LUMEN OUTPUT	1374 lm R: 90 lm G: 660 lm B: 132 lm W: 492 lm (4000K, 24°)
NO. AND TYPE OF LED	24 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 5.1

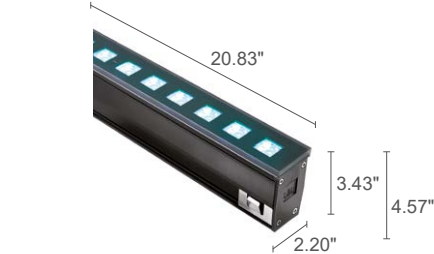

3 cable glands, 2 connectors




120-277VAC7.05 lbs 230VAC
6.61 lbs 48VDC4409.24 lbs

IK09 IP65 IP67 DMX512 RDM



POWER / MODEL CODE	24W 48VDC 20.83" LED spacing 1.61"
	TG5130040070 ■ V
POWER / MODEL CODE	29W 120-277VAC 20.83" LED spacing 1.61"
	TG5110040070 ■ V
S - 24° M - 30° L - 52°	
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	4140 lm R: 288 lm G: 1896 lm B: 456 lm W: 1500 lm (4000K)
DELIVERED LUMEN OUTPUT	2748 lm R: 180 lm G: 1320 lm B: 264 lm W: 984 lm (4000K, 24°)
NO. AND TYPE OF LED	48 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 5.3

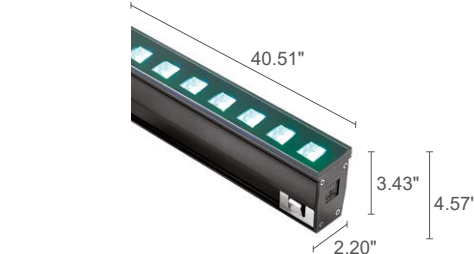

3 cable glands, 2 connectors




120-277VAC11.24 lbs 120-277VAC
10.80 lbs 48VDC4409.24 lbs

IK09 IP65 IP67 DMX512 RDM



POWER / MODEL CODE	49W 48VDC 40.51" LED spacing 1.61"
	TG5330040070 ■ V
POWER / MODEL CODE	55W 120-277VAC 40.51" LED spacing 1.61"
	TG5310040070 ■ V
S - 24° M - 30° L - 52°	
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	8280 lm R: 576 lm G: 3792 lm B: 912 lm W: 3000 lm (4000K)
DELIVERED LUMEN OUTPUT	5496 lm R: 360 lm G: 2640 lm B: 528 lm W: 1968 lm (4000K, 24°)
NO. AND TYPE OF LED	96 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 6.0



3 cable glands, 2 connectors


 5.29 lbs

IK09 IP65 IP67 DMX512 RDM



POWER / MODEL CODE	14W 48VDC 11.26" LED spacing 1.61"
	TG6030040070 ■ N Black
■ OPTICS	S - 24° M - 30° L - 52°
LED COLOR	RGBW
LUMEN OUTPUT AT SOURCE	2070 lm R: 144 lm G: 948 lm B: 228 lm W: 750 lm (4000K)
DELIVERED LUMEN OUTPUT	1374 lm R: 90 lm G: 660 lm B: 132 lm W: 492 lm (4000K, 24°)
NO. AND TYPE OF LED	24 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 6.1



3 cable glands, 2 connectors


 7.94 lbs 120-277VAC
8.38 lbs 48VDC

IK09 IP65 IP67 DMX512 RDM



POWER / MODEL CODE	24W 48VDC 21.10" LED spacing 1.61"
	TG6130040070 ■ N Black
POWER / MODEL CODE	29W 120-277VAC 21.10" LED spacing 1.61"
	TG6110040070 ■ N Black
S - 24° M - 30° L - 52°	
RGBW	
LUMEN OUTPUT AT SOURCE	4140 lm R: 288 lm G: 1896 lm B: 456 lm W: 1500 lm (4000K)
DELIVERED LUMEN OUTPUT	2748 lm R: 180 lm G: 1320 lm B: 264 lm W: 984 lm (4000K, 24°)
NO. AND TYPE OF LED	48 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO 6.3

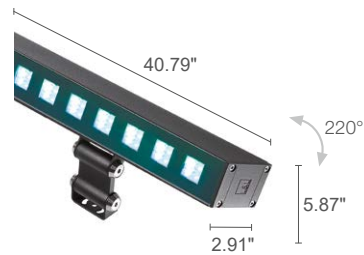

3 cable glands, 2 connectors

 12.35 lbs 120-277VAC
11.90 lbs 48VDC

IK09 IP65 IP67 DMX512 RDM




POWER / MODEL CODE	49W 48VDC 40.79" LED spacing 1.61"
	TG6330040070 ■ N Black
POWER / MODEL CODE	55W 120-277VAC 40.79" LED spacing 1.61"
	TG6310040070 ■ N Black
S - 24° M - 30° L - 52°	
RGBW	
LUMEN OUTPUT AT SOURCE	8280 lm R: 576 lm G: 3792 lm B: 912 lm W: 3000 lm (4000K)
DELIVERED LUMEN OUTPUT	5496 lm R: 360 lm G: 2640 lm B: 528 lm W: 1968 lm (4000K, 24°)
NO. AND TYPE OF LED	96 high power LEDs, 60000h L80 B10 (Ta 25°C)

TAGO

ACCESSORIES


ACCESSORIES FOR INSTALLATION



Outer casing
WCTG10A0T -
12.32" (Tago 1.0 / 4.0)

WCTG11A0T -
22.17" (Tago 1.1 / 4.1)


WCTG13A0T -
41.85" (Tago 1.3 / 4.3)



Outer casing
WCTG20A0F -
11.14" (Tago 2.0 / 5.0)

WCTG21A0F -
20.98" (Tago 2.1 / 5.1)

WCTG23A0F -
40.67" (Tago 2.3 / 5.3)



Pair of adjustable brackets
WMA03N
(Tago 3 / 6)



Alignment kit for outer casings
WN6005
(Tago 2 / 5)



3-pin female connector
for in/out connection - IP66-IP68
WFA03



3-pin male connector
for in/out connection - IP66-IP68
WFA04



5-m 3-pin interconnect cable
(DALI or 0/1–10V version)
WFA0005
(Tago 1 / 2 / 3)



5-m 3-pin interconnect cable
for DMX signal
WFA0105
(Tago 4 / 5 / 6)

SPARE PARTS










IP68 "h"-type three-way
connector 4-pin
WFA02




TAGO

PHOTOMETRIC DATA

TAGO 1.0 / 2.0 / 3.0

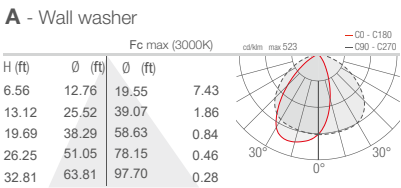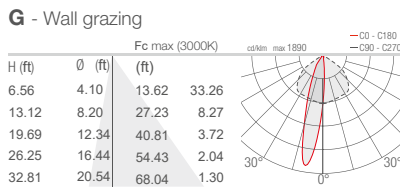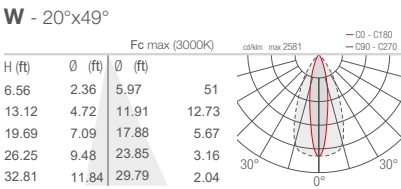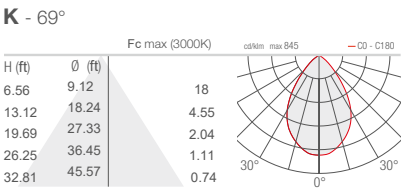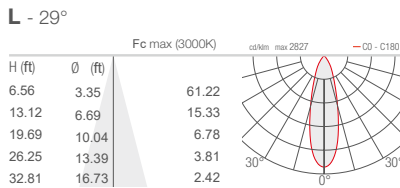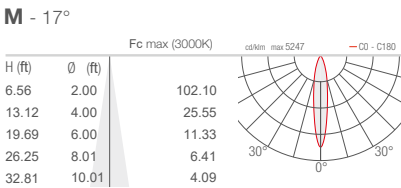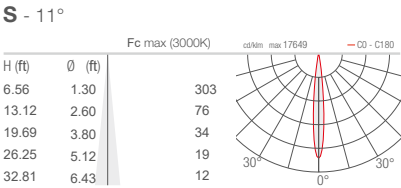

TAGO 4.0 / 5.0 / 6.0

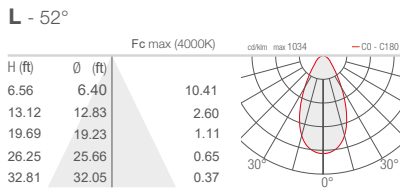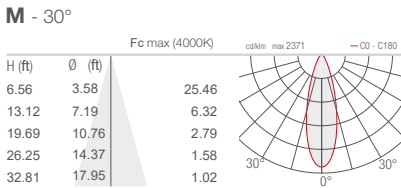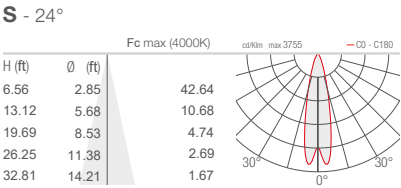

CONCEPT AND ART DIRECTION
valentinicesarottiassociati

© L&L LUCE&LIGHT SRL, 2022
ALL RIGHTS RESERVED

REV01/2022

TAGO 3.3
3000K, 51W, 69°, black



