


zygo
design by Landa R&D

A URBAN & BUCOLIC DREAM.

[UN SOGNO URBANO E BUCOLICO.]

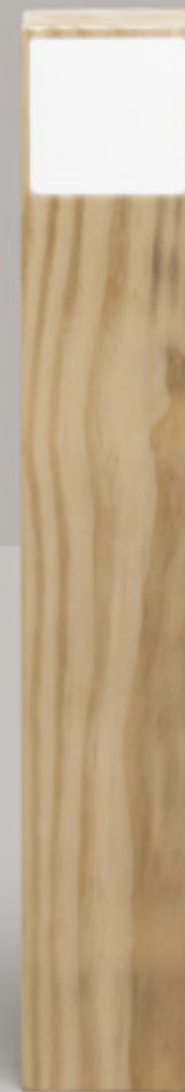

zygo

All the traditional look in the shape and the most complete and advanced proposal of materials and technical-lighting technology in Zygo: the classic transported into modernity for a bollard available with a height of 23.6". A diffused light emission together with a power of 8W make this device ideal for lighting paths, access roads and gardens.



BOLLARD



Wattage 8W

Voltage Remote 500mA

Beam 

TECHNICAL SPECIFICATIONS

Source lamp	<u>LED 5.5W</u>
Total wattage	<u>8W</u>
Voltage	<u>500mA, 50-60 Hz</u>
Control	<u>On/Off</u>
Light color	<u>3000K • other colors on request</u>
Luminous flux (*Source flux)	<u>542 lm (759 lm*)</u>
Luminous efficacy	<u>68 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>Diffuse</u>
CRI	<u>> 90</u>
Lifetime	<u>L70 > 50.000 h Ta 40°C</u>
IP rating	<u>IP65</u>
IK rating	<u>IK08</u>

DIFFUSE

<u>LED 5.5W</u>
<u>8W</u>
<u>500mA, 50-60 Hz</u>
<u>On/Off</u>
<u>3000K • other colors on request</u>
<u>542 lm (759 lm*)</u>
<u>68 lm/W</u>
<u>3</u>
<u>Diffuse</u>
<u>> 90</u>
<u>L70 > 50.000 h Ta 40°C</u>
<u>IP65</u>
<u>IK08</u>

MATERIALS

Body	<u>Accoya® wood and inox AISI 316L</u>
Diffuser	<u>Opal polycarbonate</u>
Finishing	<u>Acetylation treatment</u>

ORDER CODE

ZY 5 0 060 D H B B Z 3

INCLUDED ACCESSORIES

Code	Description
-	<u>Single connection IP68</u>
-	<u>Root mounting kit</u>

