


ELEMENT PRO 2 / 2-B


Element Pro is a linear, wall-mounted luminaire, made of aluminum and glass, with single or double emission version. It is available in 3 different lengths, 3 color temperatures and 4 optics options. Element Pro 2 (mono) and 2-B (bi) are 20.5" in length with 5 standard finishes.

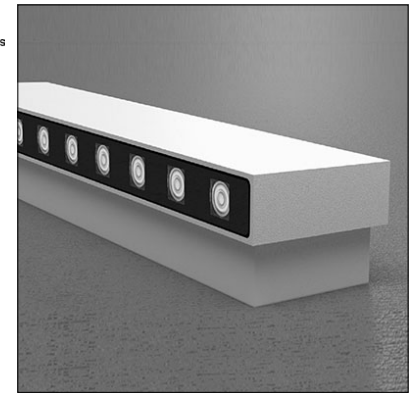

TECHNICAL DATA

Wattage / Input	22W - Element Pro 2 Mono 2 x 22W - Element Pro 2-B Bi
Power Supply	Remote 700mA, not included. See page 2
Dimming	0-10V Dimming
Construction	Body: Anticorodal Aluminum (Anodized), AISI 304 Stainless Steel Lens: Extra Clear, Screen-printed, Tempered Glass Cable Length: 1.64'
CCT	2700K, 3000K, 4000K
BUG Rating	B2-U5-G0
Delivered Lumens	1850 lm (3000K - Mono - Element Pro 2) 3700 lm (3000K - Bi - Element Pro 2-B)
Efficacy	84.1 lm/W (3000K)
Optics	4 Standard, See Below
Finishes	5 Standard, See Below
Fixture Dimensions	20.47" l x 3.15" w x 3.94" h
Color Consistency	<3-Step MacAdam
IP Rating	IP66
Impact Resistance	IK09

Fixture Dimensions

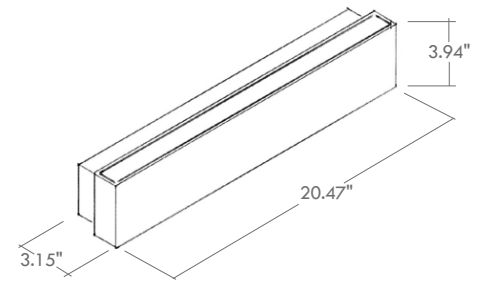

ORDERING INFORMATION

Example: LM02.104236.US.03.FL.BP. Power Supplies order separately.

Model No.	Finish	Technology	Optic	CCT
LM02.104236.US - Element Pro 2 (Mono)	01 - White	AN - 0-10V	SP - 12°	BC - 2700K
LM02.104239.US - Element Pro 2-B (Bi)	02 - Black	00 - On/Off	MD - 25°	BP - 3000K
	03 - Gray		FL - 40°	BF - 4000K
	04 - Cor-ten		HE - Horizontal Elliptical	
	11 - Anthracite			

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

700mA

Part Number	Description	Input/Output	# of Fixtures	
			22W	2x22W
PPLT00663	ELV / TRIAC & 0-10V Dimming	120-277VAC to 700mA, 30W, Class 2	1-1	
PPLT00261	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 700mA, 32W, Class 2	1-1	
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 50W, Class 2, DAMP	1-1	
PPLT00538-P	0-10V Dimming to 0.1% (4 Channels)	120-277VAC to 700mA, 100W, Class 2	1-4	

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures	
						22W	2x22W
PPLT00517	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-1	


For other power supply options consult factory.

PHOTOMETRIC DATA

Note: All photometric data is 3000K

Element Pro 2 40°


Maximum Candela = 3081.6

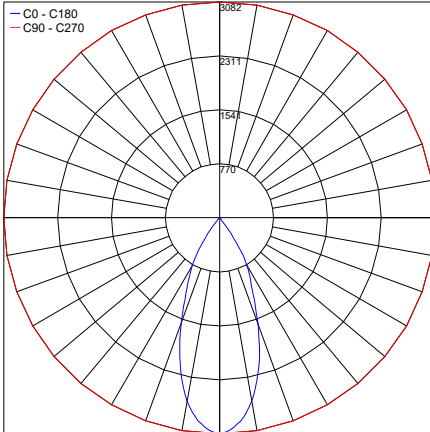

PHOTOMETRIC FILENAME : ELEMENT PRO 2 02.104236.XX.XXX.FL.XX.IES

Element Pro 2-B 12°


Maximum Candela = 20961.2

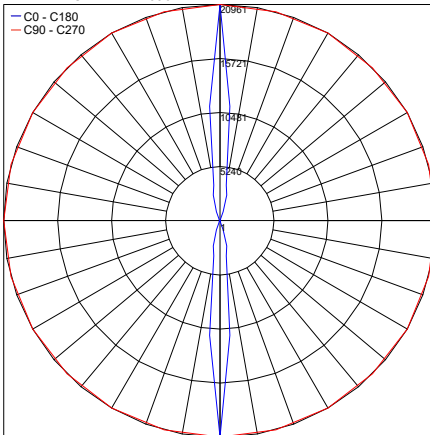

PHOTOMETRIC FILENAME : ELEMENT PRO 2-B 02.104239.XX.XXX.SP.XX.IES

Element Pro 2-B 25°


Maximum Candela = 4280.1

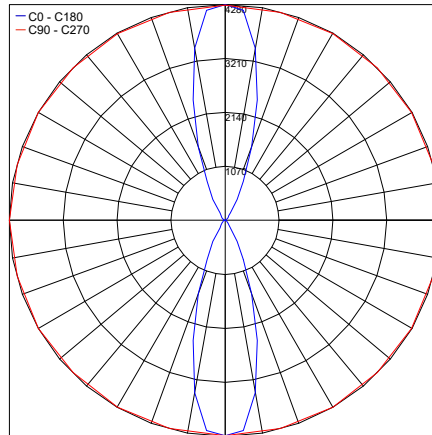

PHOTOMETRIC FILENAME : ELEMENT PRO 2-B 02.104239.XX.XXX.MD.XX.IES

Element Pro 2-B 40°

Maximum Candela = 2449.5

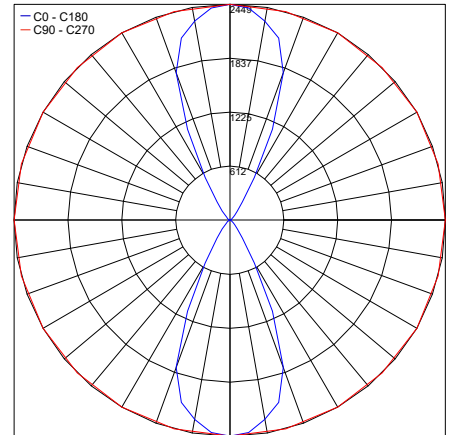

PHOTOMETRIC FILENAME : ELEMENT PRO 2-B 02.104239.XX.XXX.FL.XX.IES

Job Name/Date:

Fixture Type Designation: