

# ELEMENT SLIM 4 / 4-B



datasheet


Element Slim is a linear, wall-mounted luminaire with single or double emission versions. It is available in 4 different lengths, 3 color temperatures and an 89° or wall washer light beam. Element Slim 4 (mono) and 4-B (bi) is 35.4" in length, with 3 color temperatures, and 5 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	15W - Element Slim 4 Mono (24VDC) 30W - Element Slim 4-B Bi (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Anticorodal Aluminum (Anodized) Lens: Extra Clear, Screen-printed, Tempered Glass Cable Length: 1.64'
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B1-U1-G1 (3000K)
<b>Delivered Lumens</b>	1575 lm (3000K - Mono - Element Slim 4) 3150 lm (3000K - Bi - Element Slim 4-B)
<b>Efficacy</b>	105 lm/W (3000K)
<b>Optics</b>	2 Standard, See Below
<b>Finishes</b>	5 Standard, See Below
<b>Fixture Dimensions</b>	35.43" l x 3.94" w x 1.57" h
<b>Color Consistency</b>	<3-Step MacAdam
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK09

Fixture Dimensions

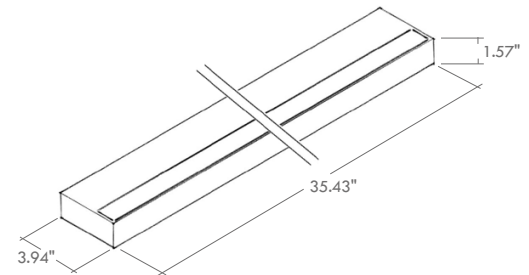

## ORDERING INFORMATION

Example: LM02.104180.US.03.FL.BP. Power Supplies ordered separately.

<b>Model No.</b>	<b>Finish</b>	<b>Optic</b>	<b>CCT</b>
LM02.104180.US - Element Slim 4 (Mono)	01 - White	FL - 89° Beam	BC - 2700K
LM02.104181.US - Element Slim 4-B (Bi)	02 - Black	WW - Wall Washer	BP - 3000K
	03 - Gray		BF - 4000K
	04 - Cor-ten		
	11 - Anthracite		

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC


Part Number	Description	Input/Output	# of Fixtures	
			E. Slim 4	E Slim 4.B
<a href="#">PPLT00481</a>	Non-Dim	120-277VAC to 24VDC, 24W, Class 2	1-1	—
<a href="#">PPLT00155</a>	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-1	—
<a href="#">PPLT00157</a>	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-3	1-1
<a href="#">PPLT00599</a>	ELV/TRIAC & 0-10V Dimming (100-0%)	120-277VAC to 24VDC, 60W, Class 2, IP20	1-5	1-2
<a href="#">PPLT00158</a>	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-5	1-2
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-5	1-2

For other power supply options consult factory.

## PHOTOMETRIC DATA


Note: All photometric data is 3000K

Maximum Candela = 624.8

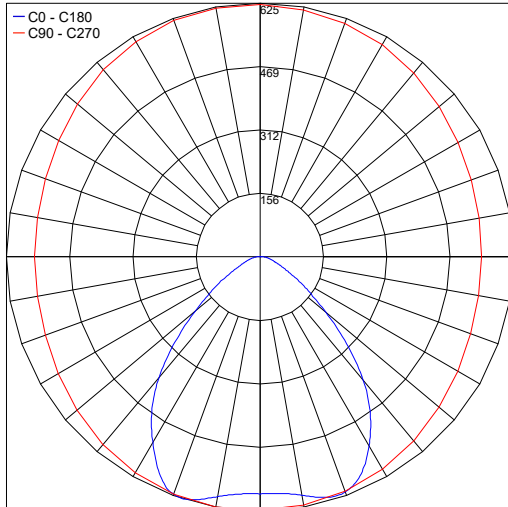

PHOTOMETRIC FILENAME : 02.104180.XX.FL.BP - LAM32 - ELEMENT SLIM 4 - MONO EMISSION - 3000K.JES

Maximum Candela = 1401.6

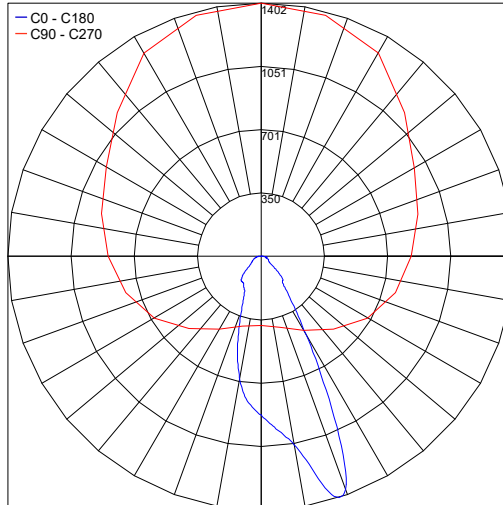

PHOTOMETRIC FILENAME : 02.104180.XX.WW.BP - LAM32 - ELEMENT SLIM 4 - MONO EMISSION - 3000K.JES

Job Name/Date:

Fixture Type Designation: