



Gem Pro is a round, IP67-rated, recessed fixture with frame, suitable for installation in floors or walls, made to ensure durability and maximum resistance against atmospheric agents. Gem Pro 4 is the Ø5.7" version with 19W, 3 color temperatures and 4 optics options.

TECHNICAL DATA

Wattage / Input	19W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anticorodal Aluminum, Stainless Steel on request. Front Ring Nut: AISI 316L Stainless Steel Lens: PMMA (Acrylic) Diffuser: Extra Clear Glass Cable Length: 1.64'
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U5-G0 (3000K) B0-U5-G1 (3000K, Wall Washer)
Delivered Lumens	2802 lm (3000K)
Efficacy	147.5 lm/W (3000K)
Optics	4 Standard, See Below
Finishes	Stainless or Bronze
Fixture Dimensions	Ø5.71" x 5.39" h
Cutout Dimensions	Ø3.98"
Color Consistency	<3-Step MacAdam
IP Rating	IP67
Driveover Capacity	Up to 3307 lbs

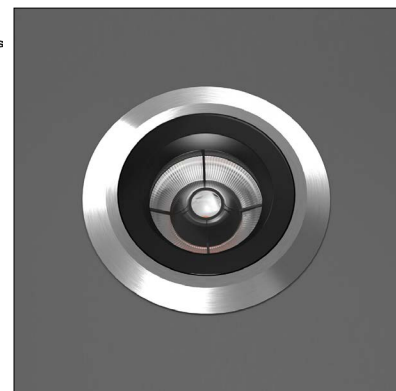

Fixture Dimensions



ORDERING INFORMATION

Example: LM07.104031.US.05.CC.MD.BP. Accessories / Power Supplies ordered separately.

LM07.104031.US		CC		
Model No.	Finish	Technology	Optic	CCT
LM07.104031.US	05 - Stainless 59 - Bronze	CC - Remote Constant Current (see page 2)	SP - 12° MD - 25° FL - 40° WW - Wall Washer	BC - 2700K BP - 3000K BF - 4000K

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00527	Phase Dim (120V only)	120VAC to 500mA, 25W, Class 2, IP66	1-1
PPLT00262	Leading/Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-1
PPLT00538-P	0-10V Dimming to 0.1% (4 Channels)	120-277VAC to 500mA, 100W, Class 2	1-4

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	1-1

For other power supply options consult factory.

ACCESSORIES - Installation



LM20.104131


Outer Casing IP20

Sizes Ø4.92" x 6.30" h

Hole Ø3.98"

PHOTOMETRIC DATA

Note: All photometric data is 3000K

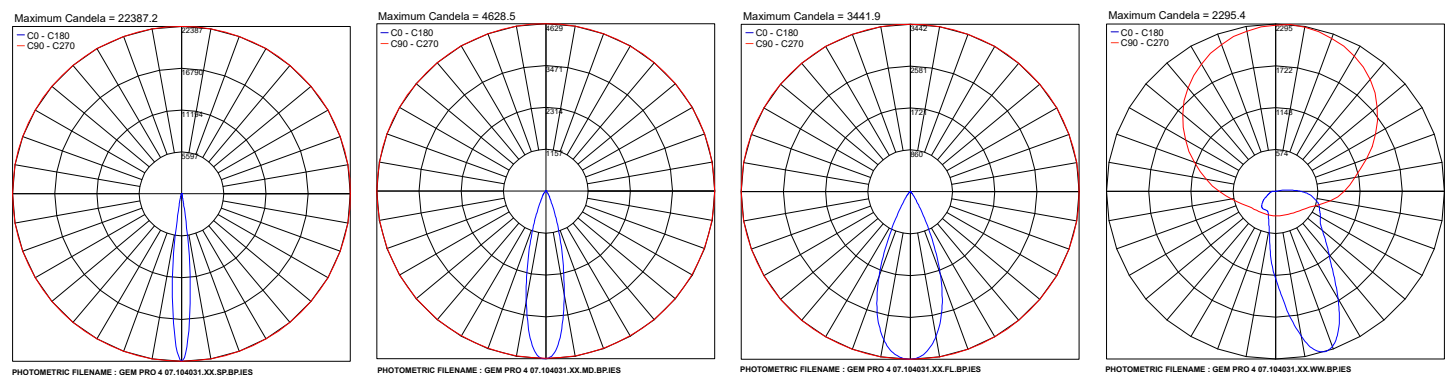

Job Name/Date:

Fixture Type Designation: