

LYRAS 130 - CEILING


LYRAS 130 CEILING is a single beam cylinder luminaire that can be either ceiling- or wall-mounted and is perfect for installation in areas with extreme weather conditions, thanks to its A4 stainless steel components and protection gaskets. It is available with spot, medium or wide flood optics, and 2 standard finishes.



TECHNICAL DATA

LED Wattage / Total	10W (300mA)
Power Supply	Remote, not included. See page 2
Construction	Body: Die-Cast Aluminum Lens: Extra clear tempered glass 0.39" (10 mm)
CCT	3000K, 4000K
BUG Rating	B1-U1-G1 (19°, 60°) B1-U1-G0 (33°)
CRI	>90
Delivered Lumens	1144 lm (19°, 3000K) 1128 lm (33°, 3000K) 1144 lm (60°, 3000K)
Efficacy	91.5 lm/W (19°, 3000K) 90 lm/W (33°, 3000K) 91.5 lm/W (60°, 3000K)
Optics	19°, 33°, 60°
Finishes	Graphite, Gray
Fixture Dimensions	Ø5.1" x 8.4"
Lumen Maintenance	L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

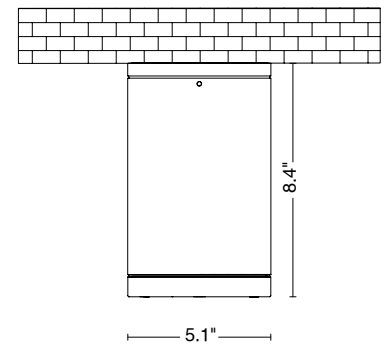

ORDERING INFORMATION

Example: LNL70SOF SHBAZH1R.US. Power Supplies sold separately.

LNL70SOF			BAZ			US
Model No.	Optics	CCT	BAZ	Finish	Emergency	US
LNL70SOF	S - 19° Spot M - 33° Medium W - 60° Flood	H - 3000K N - 4000K		L - Graphite H - Gray	00 - None 1R - Remote Emergency	

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


300mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00625	ELV / TRIAC & 0-10V Dimming	120-277VAC to 300mA, 12.6W, Class 2	1-1
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 300mA, 30W, Class 2, DAMP	1-1
PPLT00168-P	0-10V Dimming to 1.0% (2 channels)	120-277VAC to 300mA, 50W, Class 2	1-2
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 300mA, 50W, Class 2, DAMP	1-1
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 300mA, 100W, Class 2	1-4


For other power supply options consult factory.

PHOTOMETRIC DATA


Note: All photometric data is 3000K

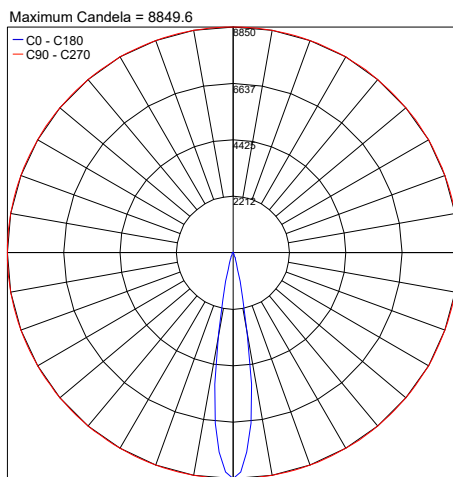

PHOTOMETRIC FILENAME : LYRAS 130 30K 19° - LY70XXSHB10X.IES

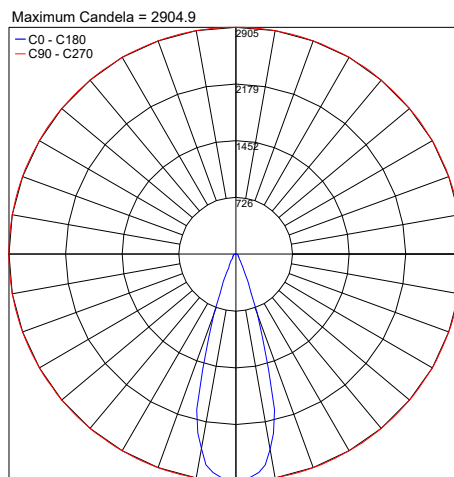

PHOTOMETRIC FILENAME : LYRAS 130 30K 33° - LY70XXMHB10X.IES

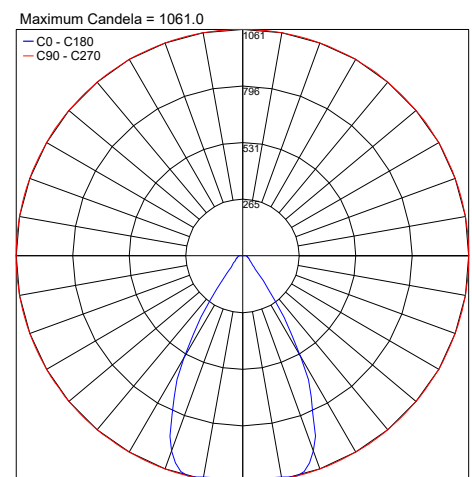

PHOTOMETRIC FILENAME : LYRAS 130 30K 60° - LY70XXWHB10X.IES

Job Name/Date:

Fixture Type Designation: