

# LYRAS 130 - CEILING


LYRAS 130 CEILING is a single beam cylinder luminaire that can be either ceiling- or wall-mounted and is perfect for installation in areas with extreme weather conditions, thanks to its A4 stainless steel components and protection gaskets. It is available with spot, medium or wide flood optics, and 2 standard finishes.



## TECHNICAL DATA

<b>Wattage</b>	10W
<b>Power Supply</b>	Remote 350mA, not included. See page 2
<b>Construction</b>	Body: Die-Cast Aluminum Lens: Extra-clear Tempered Glass 0.39" (10 mm)
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B1-U1-G1 (19°, 60°) B1-U1-G0 (33°)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	1144 lm (19°, 3000K) 1128 lm (33°, 3000K) 1144 lm (60°, 3000K)
<b>Efficacy</b>	91.5 lm/W (19°, 3000K) 90 lm/W (33°, 3000K) 91.5 lm/W (60°, 3000K)
<b>Optics</b>	19°, 33°, 60°
<b>Finishes</b>	Graphite, Gray
<b>Fixture Dimensions</b>	Ø5.1" x 8.4"
<b>Lumen Maintenance</b>	L80, B15 >60,000hrs (Ta 40°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK08

Fixture Dimensions

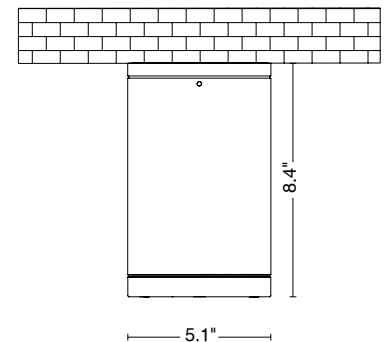

## ORDERING INFORMATION

Example: LNL70SOF SHBAZH1R.US. Power Supplies sold separately.

LNL70SOF			BAZ			US
Model No.	Optics	CCT	BAZ	Finish	Emergency	US
LNL70SOF	S - 19° Spot M - 33° Medium W - 60° Flood	Y - 2700K H - 3000K N - 4000K	BAZ	L - Graphite H - Gray	00 - None 1R - Remote Emergency	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


300mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00625</a>	ELV / TRIAC & 0-10V Dimming	120-277VAC to 300mA, 12.6W, Class 2	1-1
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 300mA, 30W, Class 2, DAMP	1-1
<a href="#">PPLT00168-P</a>	0-10V Dimming to 1.0% (2 channels)	120-277VAC to 300mA, 50W, Class 2	1-2
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 300mA, 50W, Class 2, DAMP	1-1
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 300mA, 100W, Class 2	1-4


For other power supply options consult factory.

## PHOTOMETRIC DATA


Note: All photometric data is 3000K

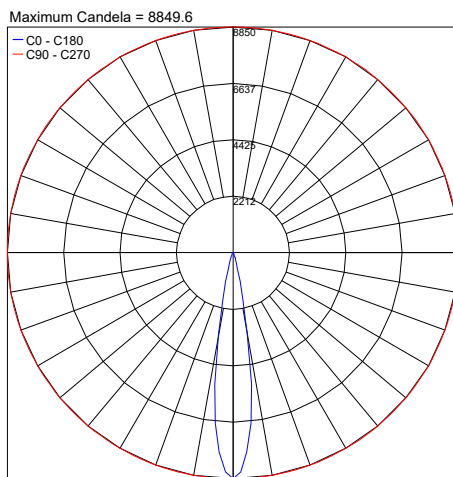

PHOTOMETRIC FILENAME : LYRAS 130 30K 19° - LY70XXSHB10X.IES

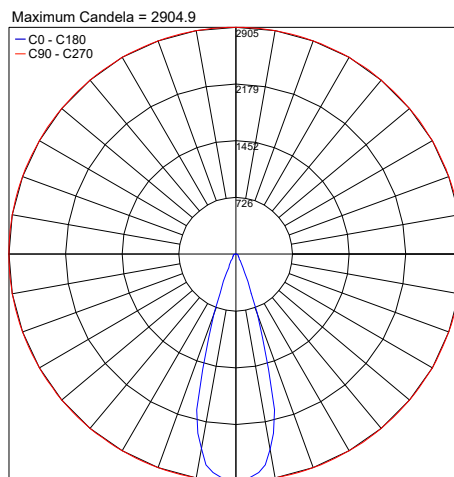

PHOTOMETRIC FILENAME : LYRAS 130 30K 33° - LY70XXMHB10X.IES

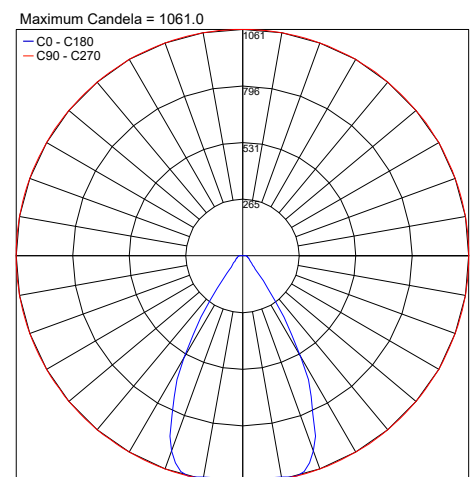

PHOTOMETRIC FILENAME : LYRAS 130 30K 60° - LY70XXWHB10X.IES

Job Name/Date:

Fixture Type Designation: