

LYRAS 65 - CEILING


LYRAS 65 CEILING is a single beam cylinder luminaire that can be either ceiling- or wall-mounted and is perfect for installation in areas with extreme weather conditions, thanks to its A4 stainless steel components and protection gaskets. It is available with spot, flood or diffuse optics, and 2 standard finishes.



TECHNICAL DATA

LED Wattage / Total	5W LED, 6W total
Power Supply	Integral 120-277VAC
Construction	Body: Die-Cast Aluminum Lens: Extra-clear Tempered Glass 0.31" (8 mm)
CCT	3000K, 4000K
BUG Rating	B1-U0-G0 (12°, 3000K) B1-U0-G0 (40°, 3000K)
CRI	>90
Delivered Lumens	360 lm (12°, 3000K) 310 lm (40°, 3000K) 88 lm (Diffuse 90°, 3000K)
Efficacy	60 lm/W (12°, 3000K) 52 lm/W (40°, 3000K) 14.7 lm/W (Diffuse 90°, 3000K)
Optics	12°, 40°, Diffuse 90°
Finishes	Graphite, Gray
Fixture Dimensions	Ø2.4" x 4.3"
Lumen Maintenance	L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

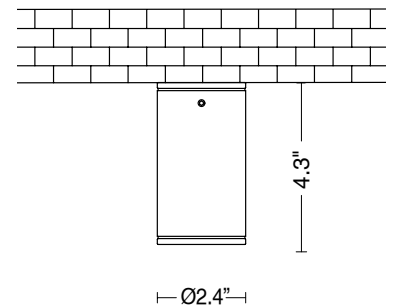

ORDERING INFORMATION

Example: LNL30SOFSHB7ZH.US.

LNL30SOF			B7Z		US
Model No.	Optics	CCT	Finish		
LNL30SOF	S - 12° Spot F - 40° Flood D - 90° Diffuse	H - 3000K N - 4000K	L - Graphite H - Gray	B7Z	US


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: All photometric data is 3000K

Maximum Candela = 4402.3

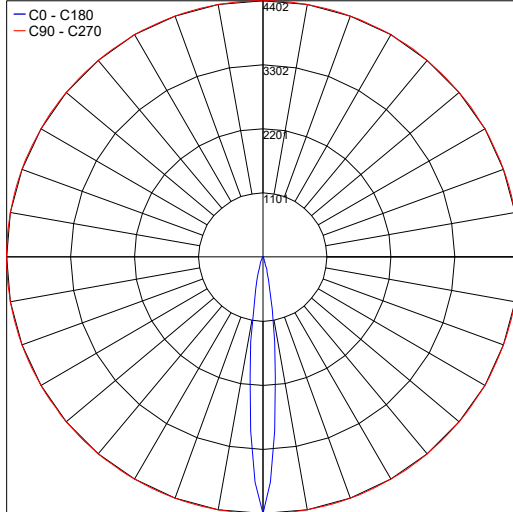

PHOTOMETRIC FILENAME : LYRAS 65 30K 12° - LNLY30SOFSHB10X.IES

Maximum Candela = 594.3

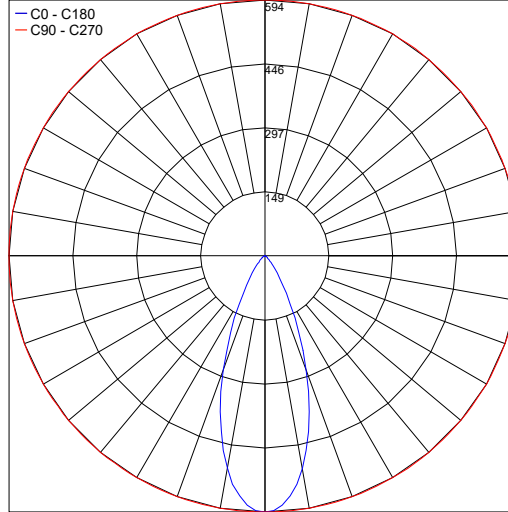

PHOTOMETRIC FILENAME : LYRAS 65 30K 40° - LNLY30SOFFHB10X.IES

Job Name/Date:

Fixture Type Designation: