

LYRAS 80 - CEILING


LYRAS 80 CEILING is a single beam cylinder luminaire that can be either ceiling- or wall-mounted and is perfect for installation in areas with extreme weather conditions, thanks to its A4 stainless steel components and protection gaskets. It is available with spot, medium or wide flood optics, and 2 standard finishes.



TECHNICAL DATA

Wattage	6W
Power Supply	Remote 500mA, not included. See page 2
Construction	Body: Die-Cast Aluminum Lens: Extra-clear Tempered Glass 0.31" (8 mm)
CCT	2700K, 3000K, 4000K
BUG Rating	B1-U0-G0 (14°, 32°, 54°)
CRI	>90
Delivered Lumens	400 lm (14°, 3000K) 384 lm (32°, 3000K) 384 lm (54°, 3000K)
Efficacy	62.5 lm/W (14°, 3000K) 61 lm/W (32°, 3000K) 61 lm/W (54°, 3000K)
Optics	14°, 32°, 54°
Finishes	Graphite, Gray
Fixture Dimensions	Ø3.4" x 4.3"
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

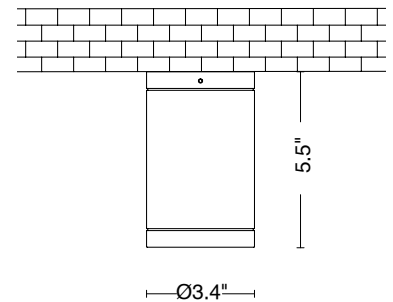

ORDERING INFORMATION

Example: LNL50SOF5HBAZH.US. Power Supplies ordered separately.

LNL50SOF			BAZ		US
Model No.	Optics	CCT	BAZ	Finish	US
LNL50SOF	S - 14° Spot M - 32° Medium W - 54° Wide Flood	Y - 2700K H - 3000K N - 4000K	BAZ	L - Graphite H - Gray	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00497	Phase Dim (120V only)	120VAC to 500mA, 12W, Class 2, DAMP	1-2
PPLT00262	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	3-4
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-5
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-5




Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	2-3
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	4-4

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: All photometric data is 3000K

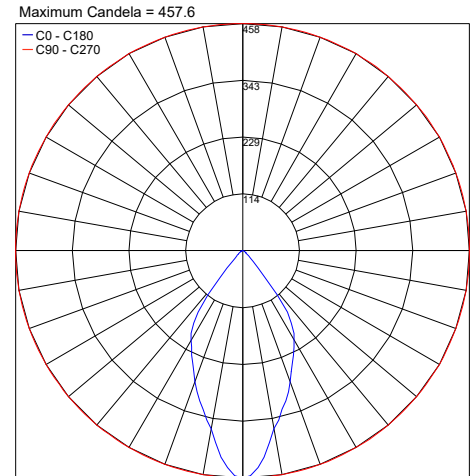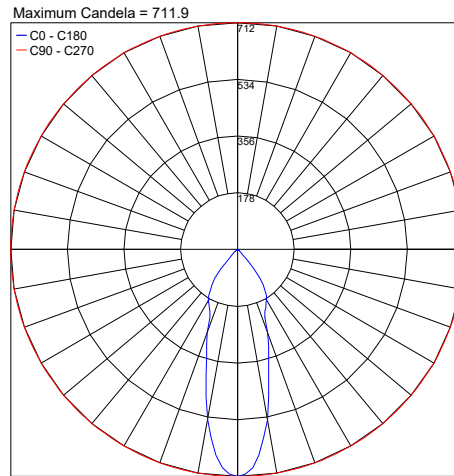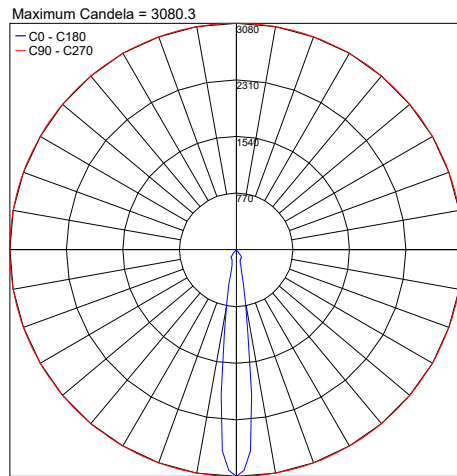

Job Name/Date:

Fixture Type Designation: