

Bright
Soul.

lyras

design by Landa R&D

designplan 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



lyras 65

Lyras 65 is an outdoor ceiling luminaire, powerful and complete with everything you need. The luminaire is available with spot, flood and diffuse light beam, with 6W power and 300mA power supply.

The 0.31" transparent tempered glass diffuser defines and enhances the light for infinite lighting effects and varied aesthetic solutions. The surface treatment of Lyras 65 is highly resistant to corrosion; the graphite and light gray finishes offer maximum integration in all outdoor environments.

LYRAS 65 | PROJECTOR also available





lyras 65


| 5W

SPOT • FLOOD • DIFFUSE




TECHNICAL SPECIFICATIONS

| | SPOT | FLOOD |
|------------------------------------|--|--|
| Source lamp | LED 5W | LED 5W |
| Total wattage | 6W | 6W |
| Voltage | 120-277VAC, 50-60 Hz | 120-277VAC, 50-60 Hz |
| Control | On/Off • dimmable on request | On/Off • dimmable on request |
| Light color | 3000K • 4000K • other colors on request | 3000K • 4000K • other colors on request |
| Delivered lumens *Source lumens | 360 lm (480 lm*) @ 3000 K 360 lm (480 lm*) @ 4000 K | 310 lm (480 lm*) @ 3000 K 310 lm (480 lm*) @ 4000 K |
| Luminous efficacy | 60 lm/W @ 3000 K 60 lm/W @ 4000 K | 52 lm/W @ 3000 K 52 lm/W @ 4000 K |
| McADAM steps | 3 | 3 |
| Beam | 12° | 40° |
| CRI | > 90 | > 90 |
| Life time | L70 > 50.000 h Ta 40°C | L70 > 50.000 h Ta 40°C |
| IP rating | IP66 | IP66 |
| IK rating | IK08 | IK08 |




| H (ft) | fc | | Ø (ft) |
|--------|----------|----------|--------|
| | (3000 K) | (4000 K) | |
| 3.28' | 409.0 | 409.0 | 0.66' |
| 6.56' | 102.3 | 102.3 | 1.31' |
| 9.84' | 45.4 | 45.4 | 1.97' |
| 13.12' | 25.5 | 25.5 | 2.62' |
| 16.40' | 16.4 | 16.4 | 3.28' |



| H (ft) | lux | | Ø (ft) |
|--------|----------|----------|--------|
| | (3000 K) | (4000 K) | |
| 3.28' | 55.2 | 55.2 | 2.30' |
| 6.56' | 13.8 | 13.8 | 4.59' |
| 9.84' | 6.1 | 6.1 | 6.89' |
| 13.12' | 3.4 | 3.4 | 9.19' |
| 16.40' | 2.2 | 2.2 | 11.48' |

TECHNICAL SPECIFICATIONS

| | DIFFUSE |
|------------------------------------|--|
| Source lamp | LED 5W |
| Total wattage | 6W |
| Voltage | 120-277VAC, 50-60 Hz |
| Control | On/Off • dimmable on request |
| Light color | 3000K • 4000K • other colors on request |
| Delivered lumens *Source lumens | 88 lm (480 lm*) @ 3000 K 88 lm (480 lm*) @ 4000 K |
| Luminous efficacy | 14.7 lm/W @ 3000 K 14.7 lm/W @ 4000 K |
| McADAM steps | 3 |
| Beam | 90° |
| CRI | > 90 |
| Life time | L70 > 50.000 h Ta 40°C |
| IP rating | IP66 |
| IK rating | IK08 |




E (FC)

| H (ft) | fc (3000 K) | fc (4000 K) | Ø (ft) |
|--------|----------------|----------------|--------|
| 3.28' | 4.5 | 4.5 | 6.23' |
| 6.56' | 1.1 | 1.1 | 12.80' |
| 9.84' | 0.5 | 0.5 | 19.03' |
| 13.12' | 0.3 | 0.3 | 25.59' |
| 16.40' | 0.2 | 0.2 | 31.82' |



MATERIALS

| | |
|-----------|---|
| Body | Extruded aluminum EN AW6060 |
| Diffuser | Extra clear tempered glass 0.31" (8 mm) |
| Finishing | Polyester powder paint |

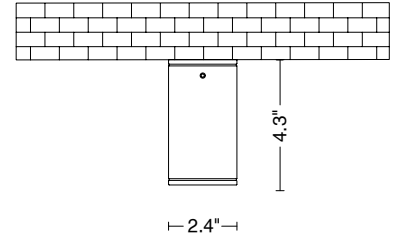

ORDER CODE

LY 3 0 SOF _ _ B 7 Z _

| | |
|-------------|-----------------------|
| Finishing | L Graphite ● |
| | M Light gray ● |
| Light color | N 4000 K |
| | H 3000 K |
| Beam | S Spot |
| | F Flood |
| | D Diffuse |

Example LY 3 0 SOF S H B 7 Z L



lyras 65


5W

SPOT • FLOOD • DIFFUSE




TECHNICAL SPECIFICATIONS

| | SPOT | FLOOD |
|------------------------------------|--|--|
| Source lamp | LED 5W | LED 5W |
| Total wattage | 5W | 5W |
| Voltage | 120-277VAC | 120-277VAC |
| Control | Dimmable on request | Dimmable on request |
| Light color | 3000K • 4000K • other colors on request | 3000K • 4000K • other colors on request |
| Delivered lumens *Source lumens | 360 lm (480 lm*) @ 3000 K 360 lm (480 lm*) @ 4000 K | 310 lm (480 lm*) @ 3000 K 310 lm (480 lm*) @ 4000 K |
| Luminous efficacy | 72 lm/W @ 3000 K 72 lm/W @ 4000 K | 62 lm/W @ 3000 K 62 lm/W @ 4000 K |
| McADAM steps | 3 | 3 |
| Beam | 12° | 40° |
| CRI | > 90 | > 90 |
| Life time | L70 > 50.000 h Ta 40°C | L70 > 50.000 h Ta 40°C |
| IP rating | IP66 | IP66 |
| IK rating | IK08 | IK08 |



E (FC)

| H (ft) | fc (3000 K) | fc (4000 K) | ∅ (ft) |
|--------|----------------|----------------|--------|
| 3.28' | 409.0 | 409.0 | 0.66' |
| 6.56' | 102.3 | 102.3 | 1.31' |
| 9.84' | 45.4 | 45.4 | 1.97' |
| 13.12' | 25.5 | 25.5 | 2.62' |
| 16.40' | 16.4 | 16.4 | 3.28' |




E (FC)

| H (ft) | fc (3000 K) | fc (4000 K) | ∅ (ft) |
|--------|----------------|----------------|--------|
| 3.28' | 55.2 | 55.2 | 2.30' |
| 6.56' | 13.8 | 13.8 | 4.59' |
| 9.84' | 6.1 | 6.1 | 6.89' |
| 13.12' | 3.4 | 3.4 | 9.19' |
| 16.40' | 2.2 | 2.2 | 11.48' |

TECHNICAL SPECIFICATIONS

| | DIFFUSE |
|------------------------------------|--|
| Source lamp | LED 5W |
| Total wattage | 5W |
| Voltage | 120-277VAC |
| Control | Dimmable on request |
| Light color | 3000K • 4000K • other colors on request |
| Delivered lumens *Source lumens | 88 lm (480 lm*) @ 3000 K 88 lm (480 lm*) @ 4000 K |
| Luminous efficacy | 17.6 lm/W @ 3000 K 17.6 lm/W @ 4000 K |
| McADAM steps | 3 |
| Beam | 90° |
| CRI | > 90 |
| Life time | L70 > 50.000 h Ta 40°C |
| IP rating | IP66 |
| IK rating | IK08 |




E (FC)

| H (ft) | f _c (3000 K) | f _c (4000 K) | Ø (ft) |
|--------|----------------------------|----------------------------|--------|
| 3.28' | 4.5 | 4.5 | 6.23' |
| 6.56' | 1.1 | 1.1 | 12.80' |
| 9.84' | 0.5 | 0.5 | 19.03' |
| 13.12' | 0.3 | 0.3 | 25.59' |
| 16.40' | 0.2 | 0.2 | 31.82' |



MATERIALS

| | |
|-----------|---|
| Body | Extruded aluminum EN AW6060 |
| Diffuser | Extra clear tempered glass 0.31" (8 mm) |
| Finishing | Polyester powder paint |

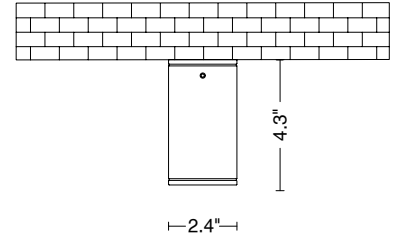

ORDER CODE

LY 3 0 S0F _ _ B 7 Z _ _

| | | |
|-------------|---------------------|---|
| Finishing | L Graphite | ● |
| | M Light gray | ● |
| Light color | N 4000K | |
| | H 3000K | |
| Beam | S Spot | |
| | F Flood | |
| | D Diffuse | |

Example LY 3 0 S0F S N B 7 Z L



lyras 80

A never invasive, correct and efficient light. Lyras 80 is a ceiling-mounted luminaire with 4.5W power and 0.31" (8 mm) extra clear tempered glass diffuser. The zenithal light beam is available with spot, medium and wide flood optics and allows the creation of extremely versatile and varied lighting effects. The graphite and light gray finishes make Lyras an elegant, discreet item suitable for infinite solutions, including wall installation. The resistance of the die-cast aluminum body makes it particularly suitable for outdoor environments, where chemical and atmospheric agents are a constant threat in terms of durability.

LYRAS 80 | WALL LAMP also available





lyras 80


SPOT • MEDIUM • WIDE FLOOD

4.5W




TECHNICAL SPECIFICATIONS

| | SPOT | MEDIUM |
|-------------------------------|--|--|
| Source lamp | LED 4.5W | LED 4.5W |
| Total wattage | 6.4W | 6.4W |
| Voltage | 120-277VAC, 50-60 Hz | 120-277VAC, 50-60 Hz |
| Control | On/Off • dimmable on request | On/Off • dimmable on request |
| Light colour | 3000K • 4000K • other colors on request | 3000K • 4000K • other colors on request |
| Luminous flux *Source flux | 400 lm (500 lm*) @ 3000K 400 lm (500 lm*) @ 4000K | 384 lm (500 lm*) @ 3000K 384 lm (500 lm*) @ 4000K |
| Luminous efficacy | 62.5 lm/W @ 3000 K 62.5 lm/W @ 4000 K | 61 lm/W @ 3000 K 61 lm/W @ 4000 K |
| McADAM steps | 3 | 3 |
| Beam | 14° | 32° |
| CRI | > 90 | > 90 |
| Life time | L70 > 50.000 h Ta 40°C | L70 > 50.000 h Ta 40°C |
| IP rating | IP66 | IP66 |
| IK rating | IK08 | IK08 |




| H (ft) | fc | | Ø (ft) |
|--------|----------|----------|--------|
| | (3000 K) | (4000 K) | |
| 3.28' | 286.1 | 286.1 | 0.66' |
| 6.56' | 71.5 | 71.5 | 1.64' |
| 9.84' | 31.8 | 31.8 | 2.30' |
| 13.12' | 17.9 | 17.9 | 3.28' |
| 16.40' | 11.4 | 11.4 | 3.94' |



| H (ft) | fc | | Ø (ft) |
|--------|----------|----------|--------|
| | (3000 K) | (4000 K) | |
| 3.28' | 66.1 | 66.1 | 1.97' |
| 6.56' | 16.5 | 16.5 | 3.61' |
| 9.84' | 7.3 | 7.3 | 5.58' |
| 13.12' | 4.1 | 4.1 | 7.55' |
| 16.40' | 2.6 | 2.6 | 9.51' |

TECHNICAL SPECIFICATIONS

| | WIDE FLOOD |
|------------------------------------|--|
| Source lamp | LED 4.5W |
| Total wattage | 6.4W |
| Voltage | 120-277VAC, 50-60 Hz |
| Control | On/Off • dimmable on request |
| Light color | 3000K • 4000K • other colors on request |
| Delivered lumens *Source lumens | 384 lm (500 lm*) @ 3000 K 384 lm (500 lm*) @ 4000 K |
| Luminous efficacy | 61 lm/W @ 3000K 61 lm/W @ 4000K |
| McADAM steps | 3 |
| Beam | 54° |
| CRI | > 90 |
| Life time | L70 > 50.000 h Ta 40°C |
| IP rating | IP66 |
| IK rating | IK08 |




E (FC)

| H (fc) | fc (3000 K) | fc (4000 K) | Ø (ft) |
|--------|----------------|----------------|--------|
| 3.28' | 42.5 | 42.5 | 3.28' |
| 6.56' | 10.6 | 10.6 | 6.56' |
| 9.84' | 4.7 | 4.7 | 9.84' |
| 13.12' | 2.7 | 2.7 | 13.12' |
| 16.40' | 1.7 | 1.7 | 16.40' |



MATERIALS

| | |
|-----------|---|
| Body | Die-cast aluminum EN47100 |
| Diffuser | Extra clear tempered glass 0.31" (8 mm) |
| Finishing | Polyester powder paint |

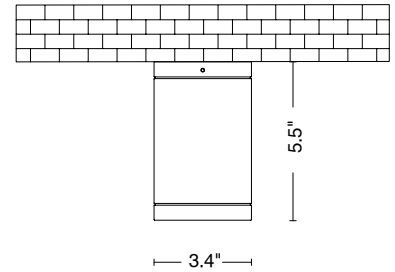

ORDER CODE

LY 5 0 SOF _ _ B A Z _

| | |
|-------------|-----------------------|
| Finishing | L Graphite ● |
| | M Light gray ● |
| Light color | N 4000K |
| | H 3000K |
| Beam | S Spot |
| | M Medium |
| | W Wide flood |

Example LY 5 0 SOF SN BAZL



lyras 130

Lyras 130 is a single-emission cylinder that can be either ceiling- or wall-mounted. 10W power, 0.39" (10 mm) extra clear tempered glass and spot, medium and wide flood optics.

The two available finishes, graphite and light gray, allow powerful, discreet and precise installations. The light beams communicate with the spaces, illuminating them without hesitation. Lyras 130 is particularly suitable and resistant even under extreme weather conditions, thanks to its A4 stainless steel components and 70SH EPDM protection gaskets; the EN-47100 die-cast aluminum and extruded EN AW6060 aluminum body is resistant to oxidation.

LYRAS 130 | WALL LAMP also available





lyras 130


| 10W

SPOT • MEDIUM • WIDE FLOOD




TECHNICAL SPECIFICATIONS

| | SPOT | MEDIUM |
|------------------------------------|--|--|
| Source lamp | LED 10W | LED 10W |
| Total wattage | 12.5W | 12.5W |
| Voltage | 120-277VAC, 50-60 Hz | 120-277VAC, 50-60 Hz |
| Control | On/Off • dimmable on request | On/Off • dimmable on request |
| Light color | 3000K • 4000K • other colors on request | 3000K • 4000K • other colors on request |
| Delivered lumens *Source lumens | 1144 lm (1300 lm*) @ 3000K 1144 lm (1300 lm*) @ 4000K | 1128 lm (1300 lm*) @ 3000K 1128 lm (1300 lm*) @ 4000K |
| Luminous efficacy | 91.5 lm/W @ 3000K 91.5 lm/W @ 4000K | 90 lm/W @ 3000K 90 lm/W @ 4000K |
| McADAM steps | 3 | 3 |
| Beam | 19° | 33° |
| CRI | > 90 | > 90 |
| Life time | L70 > 50.000 h Ta 40°C | L70 > 50.000 h Ta 40°C |
| IP rating | IP66 | IP66 |
| IK rating | IK08 | IK08 |




| E (FC) | | | |
|--------|----------------|----------------|--------|
| H (ft) | fc (3000 K) | fc (4000 K) | Ø (ft) |
| 3.28' | 822.2 | 822.2 | 0.98' |
| 6.56' | 205.5 | 205.5 | 1.97' |
| 9.84' | 91.3 | 91.3 | 2.95' |
| 13.12' | 51.4 | 51.4 | 3.94' |
| 16.40' | 32.9 | 32.9 | 5.25' |



| E (FC) | | | |
|--------|-----------------|-----------------|--------|
| H (ft) | lux (3000 K) | lux (4000 K) | Ø (ft) |
| 3.28' | 269.9 | 269.9 | 1.97' |
| 6.56' | 67.4 | 67.4 | 3.61' |
| 9.84' | 30.0 | 30.0 | 5.91' |
| 13.12' | 16.9 | 16.9 | 7.87' |
| 16.40' | 10.8 | 10.8 | 9.84' |

TECHNICAL SPECIFICATIONS

| | WIDE FLOOD |
|------------------------------------|--|
| Source lamp | LED 10W |
| Total wattage | 12.5W |
| Voltage | 120-277VAC, 50-60 Hz |
| Control | On/Off • dimmable on request |
| Light color | 3000K • 4000K • other colors on request |
| Delivered lumens *Source lumens | 1144 lm (1300 lm*) @ 3000K 1144 lm (1300 lm*) @ 4000K |
| Luminous efficacy | 91.5 lm/W @ 3000K 91.5 lm/W @ 4000K |
| McADAM steps | 3 |
| Beam | 60° |
| CRI | > 90 |
| Life time | L70 > 50.000 h Ta 40°C |
| IP rating | IP66 |
| IK rating | IK08 |




E (FC)

| H (ft) | fc (3000 K) | lux (4000 K) | Ø (ft) |
|--------|----------------|-----------------|--------|
| 3.28' | 97.9 | 97.9 | 3.94' |
| 6.56' | 24.5 | 24.5 | 7.55' |
| 9.84' | 10.9 | 10.9 | 11.48' |
| 13.12' | 6.1 | 6.1 | 15.42' |
| 16.40' | 3.9 | 3.9 | 19.36' |



MATERIALS

| | |
|-----------|--|
| Body | Die-cast aluminum EN47100 |
| Diffuser | Extra clear tempered glass 0.39" (10 mm) |
| Finishing | Polyester powder paint |

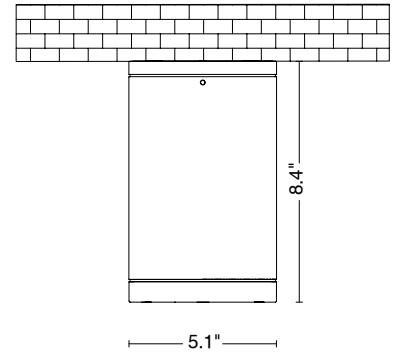

ORDER CODE

LY 7 0 SOF _ _ B A Z _

| | | |
|-------------|---------------------|---|
| Finishing | L Graphite | ● |
| | M Light gray | ● |
| Light color | N 4000K | |
| | H 3000K | |
| Beam | S Spot | |
| | M Medium | |
| | W Wide flood | |

Example LY 7 0 SOF SN BAZL

