

# ALTOPIANO 1.1


Altopiano is a family of compact, recessed outdoor downlights available in 3 sizes, round or square, suitable for hospitality and residential sectors, as well as steam rooms and natatoriums (up to 5ppm of chlorine), NOT saunas.. Available in static white, RGBW mixing or Dim to Warm. Altopiano 1.1 is the 3.9" square, static white version. UGR < 19 for 19°, 25° and 37° optics.



## TECHNICAL DATA

<b>Wattage / Input</b>	8W (350mA - General Use / 200mA - Steam Rooms)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Thermally Conductive Technopolymer Trim: Stainless Steel Lens: Diffuse or Extra-clear Glass Cable Length: 1.64' standard
<b>Ceiling Thickness</b>	Works with ceilings 1/8" to 3/4" thick For ceilings 3/64" to 1 3/8" thick, use spring clips
<b>CCT</b>	2200K, 2700K, 3000K, 4000K
<b>CRI</b>	80, >90 (2200K only available >90)
<b>Delivered Lumens</b>	498 lm (3000K, 25°, CRI >90, 350mA) 588 lm (3000K, 25°, CRI 80, 350mA)
<b>Efficacy</b>	62.3 lm/W (3000K, 25°, CRI >90) 73.5 lm/W (3000K, 25°, CRI 80)
<b>Optics</b>	6 Standard (see below)
<b>Finishes</b>	5 Standard, Custom RAL on request (4 Stage Marine Grade Finish)
<b>Fixture Dimensions</b>	3.86" x 3.86" x 3.54" h
<b>Cut-out Size</b>	3.54" x 3.54"
<b>Fixture Weight</b>	1.32 lbs
<b>UGR</b>	< 19 for 19°, 25° and 37° optics
<b>Lumen Maintenance</b>	60,000 hrs L90, B10 (Ta 25°C)
<b>Color Consistency</b>	2-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK10

Fixture Dimensions

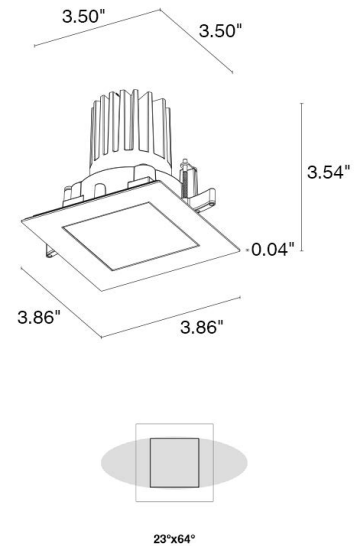

## ORDERING INFORMATION

Example: AP1110100150KF. Accessories / Power Supplies ordered separately.

AP1110		0						
Model #	CRI	Power	Accessories	CCT	Optics	Finish		
AP1110	0 - CRI 80 (not available on 2200K)  1 - CRI>90	0 - See Drivers on page 2	00 - None 01 - Honeycomb 02 - Anti-Glare <b>NOTE: Honeycomb Louvre and Anti-glare Shield not available on 0D (Diffuse) or 0W (23"x64")</b>	N - 2200K (CRI>90 only)  F - 2700K  5 - 3000K  9 - 4000K	0S - 19° 0M - 25° 0L - 37° 0K - 50° 0W - 23" x 64° 0D - Diffuse	H - Anthracite T - Cor-ten F - Gray E - White 7 - Primer C - Custom RAL (consult factory for "C")	.ST .NAT  <b>NOTE: Add suffix if fixture is going to be used in steam room or natatorium (up to 5ppm chlorine). NOT for use in saunas.</b>	

Job Name/Date:

Fixture Type Designation:

## BELOW DRIVERS for GENERAL USE, NATATORIUM OR JA8 (Not Suitable for Steam Rooms)

### SUGGESTED POWER SUPPLIES - 350mA - JA8 Compatible (Also for General Use)

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2, DAMP	1-1

### SUGGESTED POWER SUPPLIES - 350mA - FOR GENERAL USE / NATATORIUM (Not Steam Rooms or JA8 Compatible)

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00211</a>	Non-Dim	120VAC to 350mA, 10W, Class 2	1-1
<a href="#">PPLT00496</a>	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-1
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimmable to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-3
<a href="#">PPLT00561-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W, Class 2	1-3

For other power supply options consult factory.

## BELOW DRIVERS ONLY FOR STEAM ROOM VERSIONS

### SUGGESTED POWER SUPPLIES - 200mA - FOR STEAM ROOMS ONLY (Not JA8 Compatible)

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 200mA, 10W, Class 2, DAMP	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 200mA, 50W, Class 2, DAMP	1-3
<a href="#">PPLT00561-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 200mA, 100W, Class 2	1-3


For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### Installation

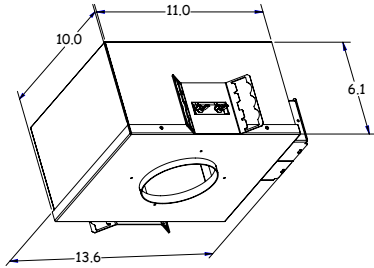


**WCA22-DP**  
IC / JA8 Housing



**WGA02**  
Retaining Spring Clip  
Use for ceilings 3/64"  
min. to 1 3/8" max. thick

### Anti-Glare




**Honeycomb Louvre**  
Built into the fixture  
*The honeycomb louvre can be provided on all fixed optics except for diffuse and elliptical optics*



**Anti-glare Shield**  
Built into the fixture  
*The anti-glare shield can be provided on all fixed optics except for diffuse and elliptical optics*



**WCA22**  
Housing for Concrete Ceilings

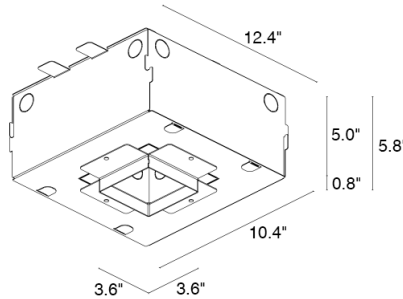

### Various



**WNAP10A0**  
Anti-Fall Kit

## PHOTOMETRIC DATA

See IES Files

Job Name/Date:

Fixture Type Designation: