

# ALTOPIANO 1.3


Altopiano is a family of compact, recessed outdoor downlights available in 3 sizes, round or square, suitable for hospitality and residential sectors, as well as steam rooms, NOT saunas. Available in static white, RGBW mixing or Dim to Warm. Altopiano 1.3 is the 3.9" square, RGBW version. PWM controller by others.



## TECHNICAL DATA

<b>Wattage / Input</b>	8W (24VDC)
<b>Power Supply</b>	Remote, not included. Consult factory.
<b>Construction</b>	Body: Thermally Conductive Technopolymer Trim: Stainless Steel Lens: Diffuse or Extra-clear Glass Cable Length: 1.64' standard
<b>Ceiling Thickness</b>	Works with ceilings 1/8" to 3/4" thick For ceilings 3/64" to 1 3/8" thick, use spring clips
<b>CCT</b>	RGBW
<b>CRI</b>	—
<b>Delivered Lumens</b>	310 lm: (R) 48 lm, (G) 117 lm, (B) 16 lm, (W) 129 lm (3000K, 24°)
<b>Efficacy</b>	38.8 lm/W (3000K, 24°)
<b>Optics</b>	6 Standard (see below)
<b>Finishes</b>	5 Standard, Custom RAL on request (4 Stage Marine Grade Finish)
<b>Fixture Dimensions</b>	3.86" x 3.86" x 3.54" h
<b>Cut-out Size</b>	3.54" x 3.54"
<b>Fixture Weight</b>	1.32 lbs
<b>LED Source</b>	1 High Intensity Power LED
<b>Lumen Maintenance</b>	60,000 hrs L90, B10 (Ta 25°C)
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK07

Fixture Dimensions

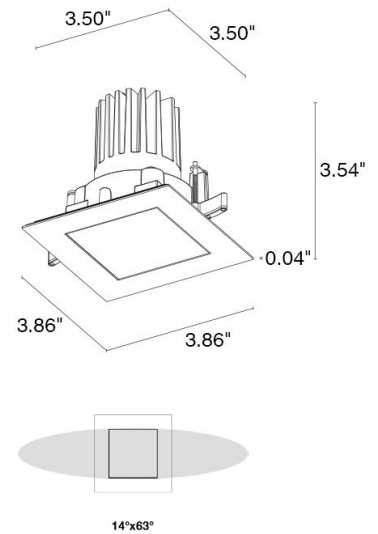

## ORDERING INFORMATION

Example: AP1300100150KF. Accessories / Power Supplies ordered separately.

AP1300	00		7		
Model #	Control System	Accessories	CCT	Optics	Finish
AP1300	00 - PWM (Controller by others)	00 - None 01 - Honeycomb <i>Honeycomb Louvre not available on 0D (Diffuse) or 0W (23°x64°)</i>	7 - RGBW	0S - 14° 0M - 24° 0L - 37° 0K - 44° 0W - 14° x 63° 0D - Diffuse	H - Anthracite T - Cor-ten F - Gray E - White 7 - Primer C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00586</a>	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-4
<a href="#">PPLT00158</a>	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-10

For other power supply options consult factory.

## ACCESSORIES

### Installation

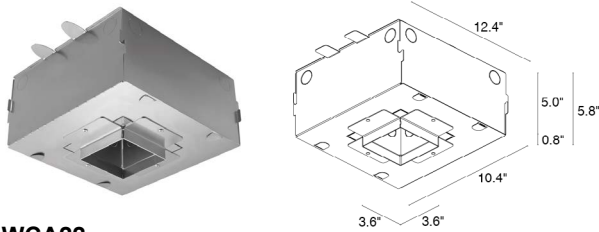

#### WCA22

Outer Casing  
For solid ceilings (concrete)  
Consult factory for regular ceilings




#### WGA02

Retaining Spring Clip  
Use for ceilings 3/64"  
min. to 1 3/8" max. thick


## ACCESSORIES

### Anti-Glare



#### Honeycomb Louvre

Built into the fixture  
The honeycomb louvre can  
be provided on all fixed optics  
except for diffuse and elliptical  
optics

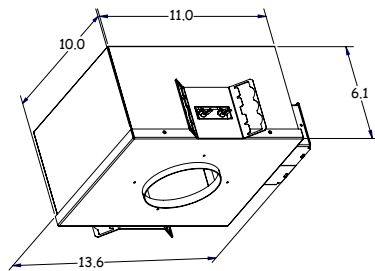

#### WCA22-DP

IC / JA8 Housing

### Various



#### WNAP10A0


Anti-Fall Kit

## PHOTOMETRIC DATA

See IES Files

## ACCESSORIES

### Controllers (RGBW)



#### PPWD00570 - RGBW DMX512+Wifi Controller

Touch Sensitive  
Can be controlled by WiFi  
Controls 3 zones synchronously and separately

Job Name/Date:

Fixture Type Designation: