


Altopiano is a family of compact, recessed outdoor downlights available in 3 sizes, round or square, perfectly suitable for hospitality and residential sectors, as well as steam rooms, NOT saunas. Available in static white, as well as RGBW mixing and Dim to Warm. Altopiano 1.7 is the 3.9" square, Dim to Warm version.

## TECHNICAL DATA

<b>Wattage / Input</b>	9W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Thermally Conductive Technopolymer Trim: Stainless Steel Lens: Diffuse or Extra-clear Glass Cable Length: 1.64' standard
<b>Ceiling Thickness</b>	Works with ceilings 1/8" to 1" thick. For ceilings 3/64" to 5/64" thick, use spring clips.
<b>CCT</b>	Dim to Warm (1800-3000K)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	372 lm (3000K, 27°)
<b>Efficacy</b>	41.3 lm/W (3000K, 27°)
<b>Optics</b>	6 Standard (see below)
<b>Finishes</b>	5 Standard, Custom RAL on request
<b>Fixture Dimensions</b>	3.86" x 3.86" x 3.54" h
<b>Cut-out Size</b>	3.54" x 3.54"
<b>Fixture Weight</b>	1.32 lbs
<b>LED Source</b>	1 COB LED
<b>Lumen Maintenance</b>	55,000 hrs L90, B10 (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK07



Fixture Dimensions

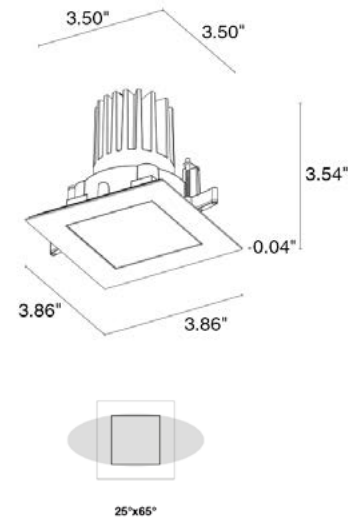

## ORDERING INFORMATION

Example: AP17101001W0KF. Accessories / Power Supplies ordered separately.

AP1710	10		W		
Model #	Control System	Accessories	CCT	Optics	Finish
AP1710	10 - Remote	<b>00</b> - None <b>01</b> - Honeycomb <b>02</b> - Anti-Glare Shield <i>Honeycomb Louvre and Anti-Glare Shield not available on 0D (Diffuse) or 0W (23°x64°)</i>	<b>W</b> - Dim to Warm <i>(1800-3000K)</i>	<b>0S</b> - 22° <b>0M</b> - 26° <b>0L</b> - 37° <b>0K</b> - 51° <b>0W</b> - 22° x 65° <b>0D</b> - Diffuse	<b>H</b> - Anthracite <b>T</b> - Cor-ten <b>F</b> - Gray <b>E</b> - White <b>7</b> - Primer <b>C</b> - Custom RAL <i>(consult factory for "C")</i>

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00211</a>	Non-Dim	120VAC to 350mA, 10W, Class 2	1-1
<a href="#">PPLT00496</a>	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-1
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2, DAMP	1-2
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimmable to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-3
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-8

For other power supply options consult factory.

## ACCESSORIES

### Installation

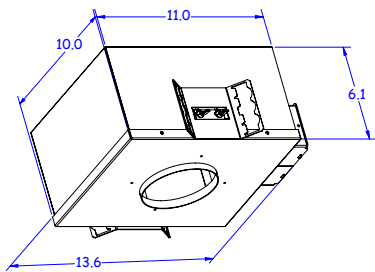


**WCA22-DP**  
IC / JA8 Housing



**WGA02**  
Retaining Spring Clip  
Use for ceilings 1/8"  
min. to 3/8" max. thick

## ACCESSORIES

### Anti-Glare



**Honeycomb Louvre**  
Built into the fixture  
The honeycomb louvre can be provided on all fixed optics except for diffuse and elliptical optics



**Anti-glare Shield**  
Built into the fixture  
The anti-glare shield can be provided on all fixed optics except for diffuse and elliptical optics

## Various



**WNAP10A0**  
Anti-Fall Kit

## PHOTOMETRIC DATA

See IES Files

Job Name/Date:

Fixture Type Designation: