

# ALTOPIANO 2.6


Altopiano is a family of compact, recessed outdoor downlights available in 3 sizes, round or square, suitable for the hospitality and residential sectors. Available in static white, RGBW mixing or Dim to Warm. Altopiano 2.6 is the 4.7" round, Dim to Warm version.

## TECHNICAL DATA

|                           |   |
|---------------------------|---|
| <b>Wattage / Input</b>    | 13W (300mA)   |
| <b>Power Supply</b>       | Remote, not included. See page 2.   |
| <b>Construction</b>       | Body: Thermally Conductive Technopolymer<br>Trim: Stainless Steel<br>Lens: Diffuse or Extra-clear Glass<br>Cable Length: 1.64' standard |
| <b>Ceiling Thickness</b>  | Works with ceilings 1/8" to 1" thick.<br>For ceilings 3/64" to 5/64" thick, use spring clips  |
| <b>CCT</b>                | Dim to Warm (1800K-3000K)   |
| <b>CRI</b>                | >90   |
| <b>Delivered Lumens</b>   | 781 lm (3000K, 26°)   |
| <b>Efficacy</b>           | 60.1 lm/W (3000K, 26°)  |
| <b>Optics</b>             | 6 Standard (see below)  |
| <b>Finishes</b>           | 5 Standard, Custom RAL on request   |
| <b>Fixture Dimensions</b> | Ø4.72" x 3.54" h  |
| <b>Cut-out Size</b>       | Ø4.33"  |
| <b>Fixture Weight</b>     | 1.54 lbs  |
| <b>LED Source</b>         | 1 COB LED   |
| <b>Lumen Maintenance</b>  | 55,000 hrs L90, B10 (Ta 25°C)   |
| <b>Color Consistency</b>  | 3-Step MacAdam  |
| <b>Operating Temp.</b>    | -4°F to +113°F  |
| <b>IP Rating</b>          | IP66  |
| <b>IK Rating</b>          | IK08  |



Fixture Dimensions

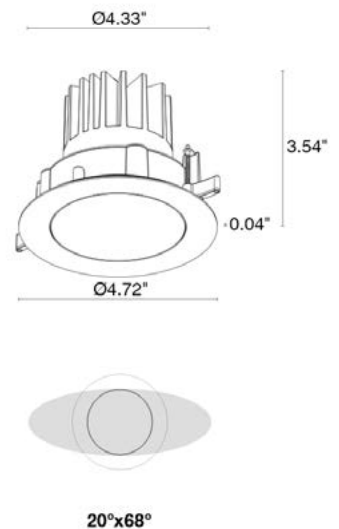

## ORDERING INFORMATION

Example: AP26101001W0LF. Accessories / Power Supplies ordered separately.

|                |  |   |  |  |  |
|----------------|--|---|--|--|--|
| <b>AP2610</b>  | <b>10</b>                                      |   | <b>W</b>   |  |  |
| <b>Model #</b> | <b>Control System</b>                          | <b>Accessories</b>  | <b>CCT</b>   | <b>Optics</b>  | <b>Finish</b>  |
| <b>AP2610</b>  | <b>10</b> - Remote<br><i>Drivers on page 2</i> | <b>00</b> - None<br><b>01</b> - Honeycomb<br><b>02</b> - Anti-Glare Shield<br><br><i>Honeycomb Louvre and Anti-Glare Shield not available on 0D (Diffuse) or 0W (20°x68°)</i> | <b>W</b> - Dim to Warm<br><br><i>(1800K-3000K)</i> | <b>0S</b> - 19°<br><b>0M</b> - 26°<br><b>0L</b> - 37°<br><b>0K</b> - 58°<br><b>0W</b> - 20° x 68°<br><b>0D</b> - Diffuse | <b>H</b> - Anthracite<br><b>T</b> - Cor-ten<br><b>F</b> - Gray<br><b>E</b> - White<br><b>7</b> - Primer<br><b>C</b> - Custom RAL<br><i>(consult factory for "C")</i> |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


300mA

| Part Number                 | Description           | Input/Output                            | # of Fixtures |
|-----------------------------|-----------------------|---|---------------|
| <a href="#">PPLT00465-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 300mA, 20W, Class 2, DAMP | 1-1           |
| <a href="#">PPLT00467-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 300mA, 50W, Class 2, DAMP | 1-3           |
| <a href="#">PPLT00538-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 300mA, 100W, Class 2      | 1-4           |

For other power supply options consult factory.

## ACCESSORIES

### Installation



#### WCA19

Outer Casing

For solid ceilings (concrete)

Consult factory for regular ceilings



#### WGA02


Retaining Spring Clip

Use for ceilings 1/8"

min. to 3/8" max. thick

## ACCESSORIES

### Anti-Glare



#### Honeycomb Louvre

Built into the fixture

The honeycomb louvre can be provided on all fixed optics except for diffuse and elliptical optics



#### Anti-glare Shield

Built into the fixture

The anti-glare shield can be provided on all fixed optics except for diffuse and elliptical optics

## Various



#### WNAP10A0

Anti-Fall Kit

## PHOTOMETRIC DATA

See IES Files

Job Name/Date:

Fixture Type Designation: