

# ALTOPIANO 2.6


Altopiano is a family of compact, recessed outdoor downlights available in 3 sizes, round or square, suitable for the hospitality and residential sectors. Available in static white, RGBW mixing or Dim to Warm. Altopiano 2.6 is the 4.7" round, Dim to Warm version.

## TECHNICAL DATA

<b>Wattage / Input</b>	13W (300mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Thermally Conductive Technopolymer Trim: Stainless Steel Lens: Diffuse or Extra-clear Glass Cable Length: 1.64' standard
<b>Ceiling Thickness</b>	Works with ceilings 1/8" to 1" thick. For ceilings 3/64" to 5/64" thick, use spring clips
<b>CCT</b>	Dim to Warm (1800K-3000K)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	781 lm (3000K, 26°)
<b>Efficacy</b>	60.1 lm/W (3000K, 26°)
<b>Optics</b>	6 Standard (see below)
<b>Finishes</b>	5 Standard, Custom RAL on request
<b>Fixture Dimensions</b>	Ø4.72" x 3.54" h
<b>Cut-out Size</b>	Ø4.33"
<b>Fixture Weight</b>	1.54 lbs
<b>LED Source</b>	1 COB LED
<b>Lumen Maintenance</b>	55,000 hrs L90, B10 (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK08



Fixture Dimensions

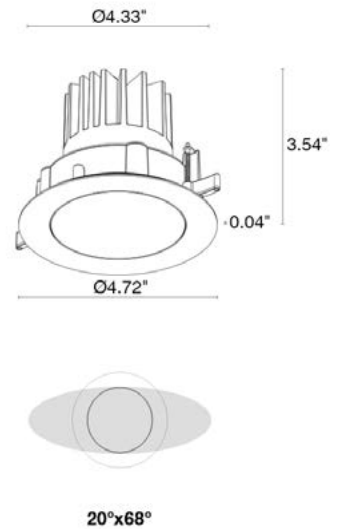

## ORDERING INFORMATION

Example: AP26101001W0LF. Accessories / Power Supplies ordered separately.

AP2610	10		W		
Model #	Control System	Accessories	CCT	Optics	Finish
AP2610	10 - Remote <i>Drivers on page 2</i>	00 - None 01 - Honeycomb 02 - Anti-Glare Shield  <i>Honeycomb Louvre and Anti-Glare Shield not available on 0D (Diffuse) or 0W (20°x68°)</i>	W - Dim to Warm <i>(1800K-3000K)</i>	0S - 19° 0M - 26° 0L - 37° 0K - 58° 0W - 20° x 68° 0D - Diffuse	H - Anthracite T - Cor-ten F - Gray E - White 7 - Primer C - Custom RAL <i>(consult factory for "C")</i>

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


300mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 300mA, 20W, Class 2, DAMP	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 300mA, 50W, Class 2, DAMP	1-3
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 300mA, 100W, Class 2	1-4

For other power supply options consult factory.

## ACCESSORIES

### Installation

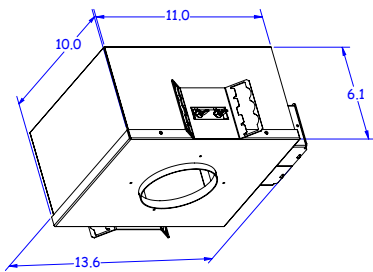

### WCA18-DP

IC / JA8 Housing




### WGA02

Retaining Spring Clip  
Use for ceilings 1/8"  
min. to 3/8" max. thick

## ACCESSORIES

### Anti-Glare



### Honeycomb Louvre

Built into the fixture  
The honeycomb louvre can be provided on all fixed optics except for diffuse and elliptical optics



### Anti-glare Shield

Built into the fixture  
The anti-glare shield can be provided on all fixed optics except for diffuse and elliptical optics

## Various



**WNAP10A0**  
Anti-Fall Kit

## PHOTOMETRIC DATA

See IES Files

Job Name/Date:

Fixture Type Designation: