


Altopiano is a family of compact, recessed outdoor downlights available in 3 sizes, round or square, suitable for hospitality and residential sectors, as well as steam rooms and natatoriums, NOT saunas. Available in static white, RGBW mixing or Dim to Warm. Altopiano 2.7 is the 4.7" square, Dim to Warm version.



## TECHNICAL DATA

<b>Wattage / Input</b>	13W (300mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Thermally Conductive Technopolymer Trim: Stainless Steel Lens: Diffuse or Extra-clear Glass Cable Length: 1.64' standard
<b>Ceiling Thickness</b>	Works with ceilings 1/8" to 1" thick. For ceilings 3/64" to 5/64" thick, use spring clips
<b>CCT</b>	Dim to Warm (1800K-3000K)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	781 lm (3000K, 26°)
<b>Efficacy</b>	60.1 lm/W (3000K, 26°)
<b>Optics</b>	6 Standard (see below)
<b>Finishes</b>	5 Standard, Custom RAL on request
<b>Fixture Dimensions</b>	4.72" x 4.72" x 3.54" h
<b>Cut-out Size</b>	4.33" x 4.33"
<b>Fixture Weight</b>	1.54 lbs
<b>LED Source</b>	1 COB LED
<b>Lumen Maintenance</b>	55,000 hrs L90, B10 (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK07

Fixture Dimensions

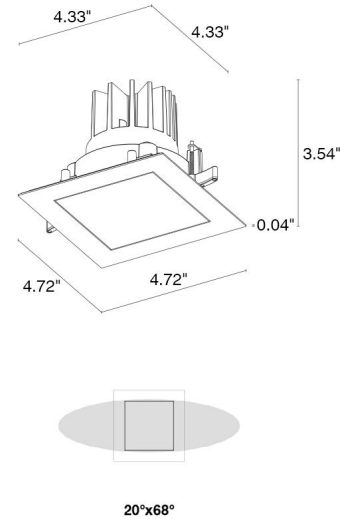

## ORDERING INFORMATION

Example: AP27101001W0KF or AP27101001W0KF-ST. Accessories / Power Supplies ordered separately.

AP2710	10		W			-	
Model #	Power	Accessories	CCT	Optics	Finish		
AP2710	10 - Remote <i>Drivers on page 2</i>	00 - None 01 - Honeycomb 02 - Anti-Glare Shield <b>NOTE:</b> Honeycomb Louvre and Anti-Glare Shield not available on OD (Diffuse) or OW (20°x68°)	W - Dim to Warm (1800K-3000K)	0S - 19° 0M - 26° 0L - 37° 0K - 58° 0W - 20° x 68° 0D - Diffuse	H - Anthracite T - Cor-ten F - Gray E - White 7 - Primer C - Custom RAL (consult factory for "C")		ST <b>NOTE:</b> Add suffix if fixture is going to used in a steam room. NOT for use in saunas.

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


300mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 300mA, 20W, Class 2, DAMP	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 300mA, 50W, Class 2, DAMP	1-3
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 300mA, 100W, Class 2	1-4

For other power supply options consult factory.

## ACCESSORIES

### Installation

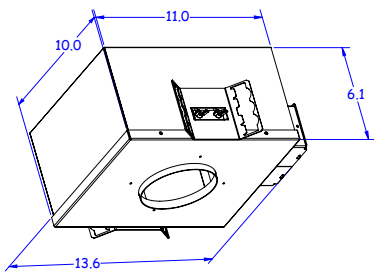


**WCA21-DP**  
IC / JA8 Housing




**WGA02**  
Retaining Spring Clip  
Use for ceilings 1/8"  
min. to 3/8" max. thick

## ACCESSORIES

### Anti-Glare



**Honeycomb Louvre**  
Built into the fixture  
The honeycomb louvre can be provided on all fixed optics except for diffuse and elliptical optics



**Anti-glare Shield**  
Built into the fixture  
The anti-glare shield can be provided on all fixed optics except for diffuse and elliptical optics

## Various



**WNAP10A0**  
Anti-Fall Kit

## PHOTOMETRIC DATA

See IES Files

Job Name/Date:

Fixture Type Designation: