

# ALTOPIANO 3.2


Altopiano is a family of compact, recessed outdoor downlights available in 3 sizes, round or square, perfectly suitable for hospitality and residential sectors, as well as steam rooms, NOT saunas. Available in static white, as well as RGBW mixing and Dim to Warm. Altopiano 3.2 is the 5.5" round, RGBW version. PWM controller by others.



## TECHNICAL DATA

<b>Wattage / Input</b>	20W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Thermally Conductive Technopolymer Trim: Stainless Steel Lens: Diffuse or Extra-clear Glass Cable Length: 1.64' standard
<b>Ceiling Thickness</b>	Works with ceilings 1/8" to 1" thick. For ceilings 3/64" to 5/64" thick, use spring clips
<b>CCT</b>	RGBW
<b>CRI</b>	—
<b>Delivered Lumens</b>	804 lm: (R) 124 lm, (G) 303 lm, (B) 41 lm, (W) 336 lm (3000K, 24°)
<b>Efficacy</b>	40.2 lm/W (3000K, 24°)
<b>Optics</b>	6 Standard (see below)
<b>Finishes</b>	5 Standard, Custom RAL on request
<b>Fixture Dimensions</b>	Ø5.51" x 3.54" h
<b>Cut-out Size</b>	Ø5.12"
<b>Fixture Weight</b>	1.76 lbs
<b>LED Source</b>	3 High Intensity Power LED
<b>Lumen Maintenance</b>	60,000 hrs L90, B10 (Ta 25°C)
<b>Color Consistency</b>	—
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK08

Fixture Dimensions

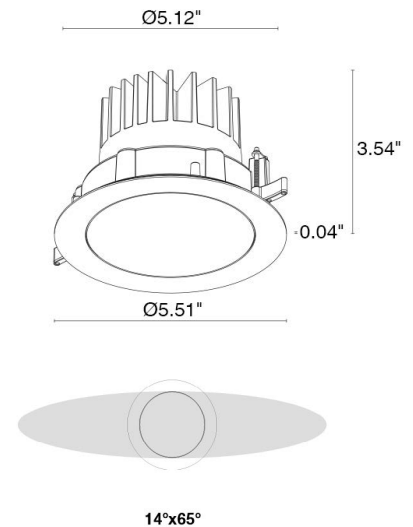

## ORDERING INFORMATION

Example: AP3200000170LF. Accessories / Power Supplies ordered separately.

AP3200	00		7		
Model #	Control System	Accessories	CCT	Optics	Finish
AP3200	00 - PWM (Controller by others)	00 - None 01 - Honeycomb <i>Honeycomb Louvre not available on 0D (Diffuse) or 0W (14°x65°)</i>	7 - RGBW	0S - 16° 0M - 24° 0L - 39° 0K - 50° 0W - 14° x 65° 0D - Diffuse	H - Anthracite T - Cor-ten F - Gray E - White 7 - Primer C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00567</a>	Non-Dim	120-277VAC to 24VDC, 36W, Class 2	1-1
<a href="#">PPLT00586</a>	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-1
<a href="#">PPLT00158</a>	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-4

For other power supply options consult factory.

## ACCESSORIES

### Installation

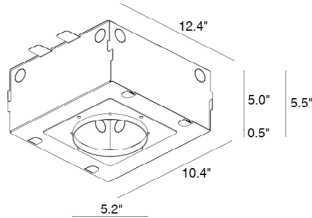

#### WCA17

Outer Casing  
For solid ceilings (concrete)  
Consult factory for regular ceilings


## ACCESSORIES

### Anti-Glare



#### WGA03

Retaining Spring Clip  
Use for ceilings 1/8"  
min. to 3/8" max. thick



#### Honeycomb Louvre

Built into the fixture  
The honeycomb louvre can  
be provided on all fixed optics  
except for diffuse and elliptical  
optics

## Various



**WNAP10A0**  
Anti-Fall Kit

## PHOTOMETRIC DATA

See IES Files

Job Name/Date:

Fixture Type Designation: