

# ALTOPIANO 3.6


Altopiano is a family of compact, recessed outdoor downlights available in 3 sizes, round or square, suitable for hospitality and residential sectors, as well as steam rooms and natatoriums, NOT saunas. Available in static white, RGBW mixing or Dim to Warm. Altopiano 3.6 is the 5.5" round, Dim to Warm version.



## TECHNICAL DATA

<b>Wattage / Input</b>	15W (400mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Thermally Conductive Technopolymer Trim: Stainless Steel Lens: Diffuse or Extra-clear Glass Cable Length: 1.64' standard
<b>Ceiling Thickness</b>	Works with ceilings 1/8" to 1" thick. For ceilings 3/64" to 5/64" thick, use spring clips
<b>CCT</b>	Dim to Warm (1800K-3000K)
<b>CRI</b>	>90
<b>Delivered Lumens</b>	1068 lm (3000K, 31°)
<b>Efficacy</b>	71.2 lm/W (3000K, 31°)
<b>Optics</b>	6 Standard (see below)
<b>Finishes</b>	5 Standard, Custom RAL on request
<b>Fixture Dimensions</b>	Ø5.51" x 3.54" h
<b>Cut-out Size</b>	Ø5.12"
<b>Fixture Weight</b>	1.76 lbs
<b>LED Source</b>	1 COB LED
<b>Lumen Maintenance</b>	55,000 hrs L90, B10 (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK08

Fixture Dimensions

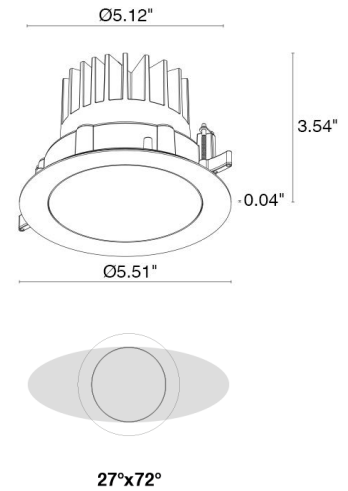

## ORDERING INFORMATION

Example: AP36101001WOLF or AP36101001WOLF-ST. Accessories / Power Supplies ordered separately.

AP3610	1D		W			-	
Model #	Power	Accessories	CCT	Optics	Finish		
AP3610	10 - Remote <i>Drivers on page 2</i>	00 - None 01 - Honeycomb 02 - Anti-Glare Shield <i>NOTE: Honeycomb Louvre and Anti-Glare Shield not available on 0D (Diffuse) or 0W (27°x72°)</i>	W - Dim to Warm <i>(1800K-3000K)</i>	0S - 25° 0M - 31° 0L - 40° 0K - 61° 0W - 27° x 72° 0D - Diffuse	H - Anthracite T - Cor-ten F - Gray E - White 7 - Primer C - Custom RAL <i>(consult factory for "C")</i>		ST <i>NOTE: Add suffix if fixture is going to used in a steam room. NOT for use in saunas.</i>

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


400mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 400mA, 20W, Class 2, DAMP	1-1
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 400mA, 50W, Class 2, DAMP	1-1
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 400mA, 100W, Class 2	1-4

For other power supply options consult factory.

## ACCESSORIES

### Installation

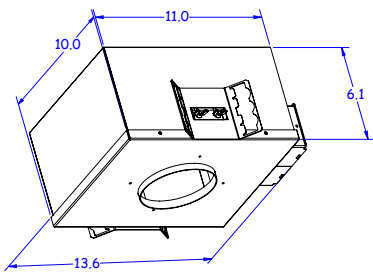

### WCA17-DP

IC / JA8 Housing




### WGA03

Retaining Spring Clip  
Use for ceilings 1/8" min. to 3/8" max. thick

## ACCESSORIES

### Anti-Glare



### Honeycomb Louvre

Built into the fixture  
The honeycomb louvre can be provided on all fixed optics except for diffuse and elliptical optics



### Anti-glare Shield

Built into the fixture  
The anti-glare shield can be provided on all fixed optics except for diffuse and elliptical optics

## Various



**WNAP10A0**  
Anti-Fall Kit

## PHOTOMETRIC DATA

See IES Files

Job Name/Date:

Fixture Type Designation: