

OUTDOOR DOWNLIGHT FOR RESIDENTIAL AND HOSPITALITY SETTINGS, SUITABLE FOR USE IN DAMP LOCATIONS, SUCH AS SPAS AND BASEMENTS

2200K 2700K 3000K 4000K

ROUND COVER

SQUARE COVER

Ø3.86"

3.86"x3.86"



ALTOPIANO 1.0
8W 24VDC

ALTOPIANO 1.1
8W 24VDC




Ø4.72"

4.72"x4.72"



ALTOPIANO 2.0
16W 24VDC

ALTOPIANO 2.1
16W 24VDC



Ø5.51"


5.51"x5.51"



ALTOPIANO 3.0
20W 24VDC

ALTOPIANO 3.1
20W 24VDC



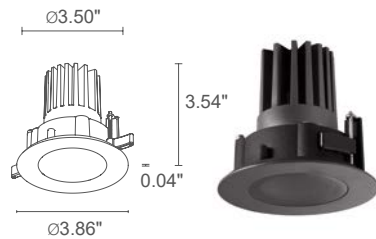


ALTOPIANO 1.0

Ø 28.86"
H 6.89" 3.54"

LED chip 1.32 lbs IP66 IK08
DALI-2

POWER / MODEL CODE	8W 24VDC
	AP1010 ■ ■ ■ ■ ■ E White AP1010 ■ ■ ■ ■ ■ F Grey AP1010 ■ ■ ■ ■ ■ H Anthracite AP1010 ■ ■ ■ ■ ■ T Cor-ten AP1010 ■ ■ ■ ■ ■ 7 Primer
CRI	0 - CRI 80 1 - CRI >90
CONTROL SYSTEM	0 - on/off D - DALI-2
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with diffuse and 23°x64° optics) 2 - anti-glare shield with concentric rings (not compatible with diffuse and 23°x64° optics)
LED COLOR	N - 2200K (only CRI >90) F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 19° M - 25° L - 37° K - 50° W - 23°x64° D - diffuse

LUMEN OUTPUT AT SOURCE	921 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT	588 lm (3000K, 25°, CRI 80)
NO. AND TYPE OF LED	1 COB LED 2-step MacAdam, 60000h L90 B10 (Ta 25°C)
MATERIAL	body in thermally conductive plastic lens in grey-serigraphed and transparent, tempered extra-clear glass trim in stainless steel
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	includes 1.64' neoprene cable H07RN-F 2x1.0 Ø0.31"
MOUNTING	recessed (ceiling)
FEATURES	UGR < 19 for 19°, 25° and 37° optics Trim in magnetic stainless steel for an aesthetic with no visible screws
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request

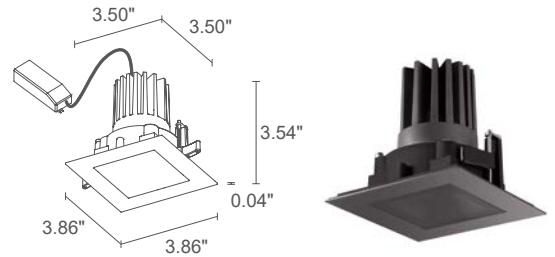


ALTOPIANO 1.1

Ø 8.86"
Ø H 6.89" 3.54"x3.54" mm

LED chip 1.32 lbs IP66 IK07
DALI-2


POWER / MODEL CODE	8W 24VDC
	AP1110 ■ ■ ■ ■ ■ E White AP1110 ■ ■ ■ ■ ■ F Grey AP1110 ■ ■ ■ ■ ■ H Anthracite AP1110 ■ ■ ■ ■ ■ T Cor-ten AP1110 ■ ■ ■ ■ ■ 7 Primer
CRI	0 - CRI 80 1 - CRI >90
CONTROL SYSTEM	0 - on/off D - DALI-2
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with diffuse and 23°x64° optics) 2 - anti-glare shield with concentric rings (not compatible with diffuse and 23°x64° optics)
LED COLOR	N - 2200K (only CRI >90) F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 19° M - 25° L - 37° K - 50° W - 23°x64° D - diffuse

LUMEN OUTPUT AT SOURCE	921 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT	588 lm (3000K, 25°, CRI 80)
NO. AND TYPE OF LED	1 COB LED 2-step MacAdam, 60000h L90 B10 (Ta 25°C)
MATERIAL	body in thermally conductive plastic lens in grey-serigraphed and transparent, tempered extra-clear glass trim in stainless steel
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	includes 1.64' neoprene cable H07RN-F 2x1.0 Ø0.31"
MOUNTING	recessed (ceiling)
FEATURES	UGR < 19 for 19°, 25° and 37° optics Trim in magnetic stainless steel for an aesthetic with no visible screws
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request

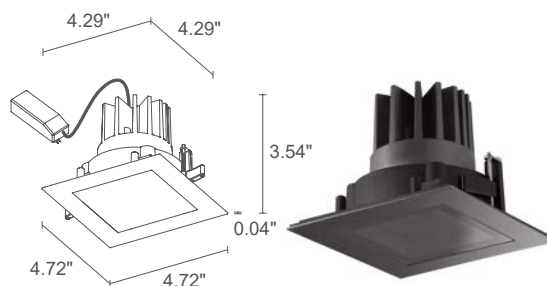

 Ø 10.83"
 H 6.89"


 Ø 4.33"



AP2010						E	White
AP2010						F	Grey
AP2010						H	Anthracite
AP2010						T	Cor-ten
AP2010						Z	Primer



 Ø 10.83"
 H 6.89"


 4.33"x4.33"




AP2110						E	White
AP2110						F	Grey
AP2110						H	Anthracite
AP2110						T	Cor-ten
AP2110						Z	Primer


23°x64° optics
(Altopiano 1.0)



23°x64° optics
(Altopiano 1.1)




16°x67° optics
(Altopiano 2.0)



16°x67° optics
(Altopiano 2.1)

1616 lm (3000K, CRI 80)
1251 lm (3000K, 57°, CRI 80)
1 COB LED 2-step MacAdam, 60000h L90 B10 (Ta 25°C)
body in thermally conductive plastic lens in grey-serigraphed and transparent, tempered extra-clear glass trim in stainless steel
Remote power supply required, not included
includes 1.64' neoprene cable H07RN-F 2x1.0 Ø0.31"
recessed (ceiling)
UGR < 19 for 16°, 26° and 38° optics Trim in magnetic stainless steel for an aesthetic with no visible screws
Casambi-compatible version, controllable with the Casambi app, available on request



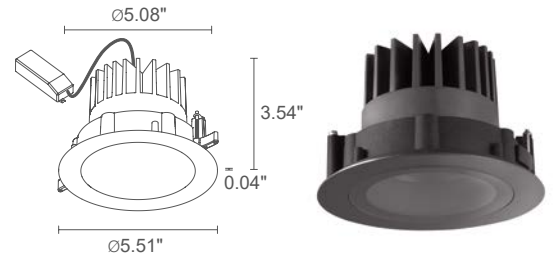

ALTOPIANO 3.0

Ø 12.60"
H 6.89"

Ø 5.12"

LED 1.76 lbs IP66 IK08
DALI-2

POWER / MODEL CODE

20W 24VDC


AP3010 0 0 0 0 E White
AP3010 0 0 0 0 F Grey
AP3010 0 0 0 0 H Anthracite
AP3010 0 0 0 0 T Cor-ten
AP3010 0 0 0 0 7 Primer

CRI	0 - CRI 80 1 - CRI >90
CONTROL SYSTEM	0 - on/off D - DALI-2
OPTICAL ACCESSORIES	0 - none 1 - honeycomb louvre (not compatible with diffuse and 20°x72° optics) 2 - anti-glare shield with concentric rings (not compatible with diffuse and 20°x72° optics)
LED COLOR	N - 2200K (only CRI >90) F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 18° M - 24° L - 37° K - 61° W - 20°x72° D - diffuse

LUMEN OUTPUT AT SOURCE	2469 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT	1988 lm (3000K, 18°, CRI 80)
NO. AND TYPE OF LED	1 COB LED 2-step MacAdam, 60000h L90 B10 (Ta 25°C)
MATERIAL	body in thermally conductive plastic lens in grey-serigraphed and transparent, tempered extra-clear glass trim in stainless steel
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	includes 1.64' neoprene cable H07RN-F 2x1.0 Ø0.31"
MOUNTING	recessed (ceiling)
FEATURES	UGR < 19 for 18°, 24° and 37° optics Trim in magnetic stainless steel for an aesthetic with no visible screws
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request

ALTOPIANO 3.1
painted primer version



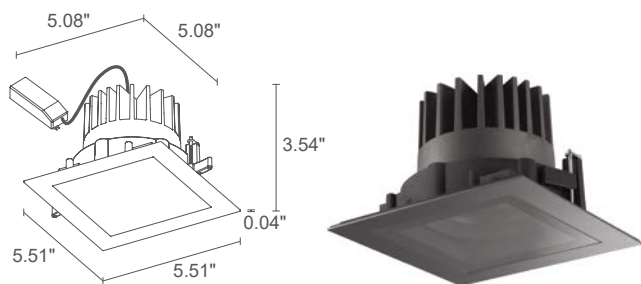

ALTOPIANO 3.1


Ø 12.60"
H 6.89"
5.12" x 5.12"

LED
1.76 lbs IP66 IK07
DALI-2


20W 24VDC

AP3110 ■ **0** ■ ■ ■ **E** White
AP3110 ■ ■ ■ ■ **F** Grey
AP3110 ■ ■ ■ ■ **H** Anthracite
AP3110 ■ ■ ■ ■ **T** Cor-ten
AP3110 ■ ■ ■ ■ **7** Primer

■	0 - CRI 80 1 - CRI >90
■	0 - on/off D - DALI-2
■	0 - none 1 - honeycomb louvre (not compatible with diffuse and 20°x72° optics) 2 - anti-glare shield with concentric rings (not compatible with diffuse and 20°x72° optics)
■	N - 2200K (only CRI >90) F - 2700K 5 - 3000K 9 - 4000K
■	S - 18° M - 24° L - 37° K - 61° W - 20°x72° D - diffuse



20°x72° optics
(Altopiano 3.0)



20°x72° optics
(Altopiano 3.1)

2469 lm (3000K, CRI 80)

1988 lm (3000K, 18°, CRI 80)

1 COB LED
2-step MacAdam, 60000h L90 B10 (Ta 25°C)

body in thermally conductive plastic
lens in grey-serigraphed and transparent,
tempered extra-clear glass
trim in stainless steel

Remote power supply required, not included

includes 1.64' neoprene cable
H07RN-F 2x1.0 Ø0.31"

recessed (ceiling)

UGR < 19 for 18°, 24° and 37° optics
Trim in magnetic stainless steel for an aesthetic
with no visible screws

Casambi-compatible version, controllable with the Casambi
app, available on request

see accessories page



White



Grey




Anthracite



Cor-ten




Primer

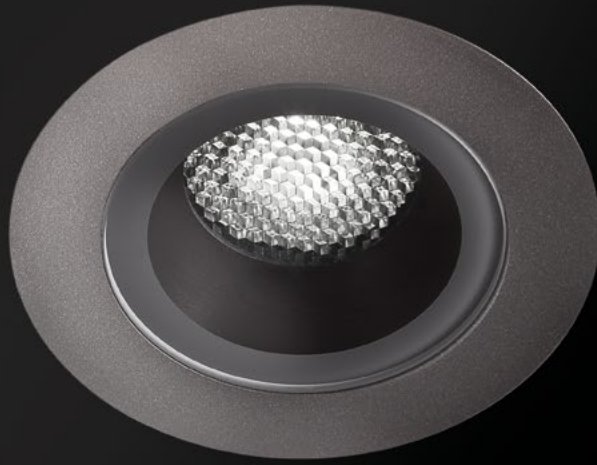


ACCESSORIES

ACCESSORIES FOR INSTALLATION




WCA19

Outer casing for solid walls
(Altopiano 1.0)




WCA22

Outer casing for solid walls
(Altopiano 1.1)




WCA18

Outer casing for solid walls
(Altopiano 2.0)




WCA21

Outer casing for solid walls
(Altopiano 2.1)



WCA17

Outer casing for solid walls
(Altopiano 3.0)



WCA20

Outer casing for solid walls
(Altopiano 3.1)



WGA02

Fixing springs for installation
(Altopiano 1 / 2)



WGA03

Fixing springs for installation
(Altopiano 3)



WNAP10A0

Anti-fall kit



WFA06


Two-pin male-female
IP66-IP68 connector




OUTDOOR RECESSED

ALTOPIANO 1


S - 19° CRI 80

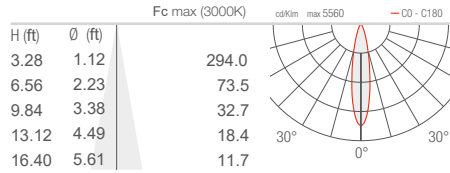


M - 25° CRI 80

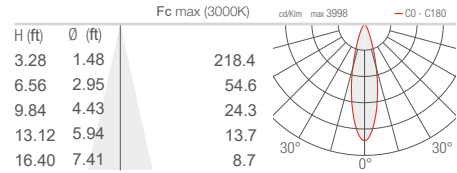


L - 37° CRI 80

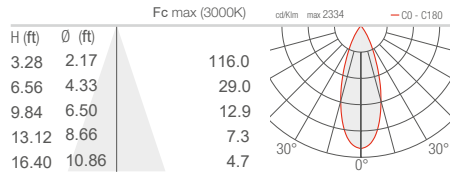


K - 50° CRI 80

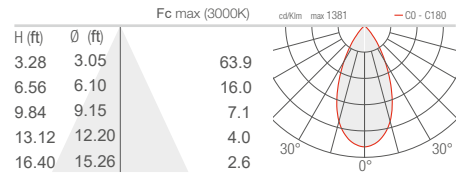

W - 23°x64° CRI 80

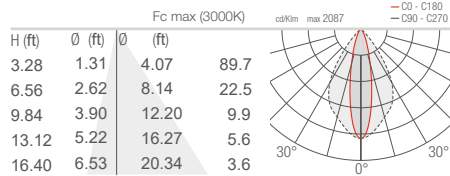


D - Diffuse CRI 80

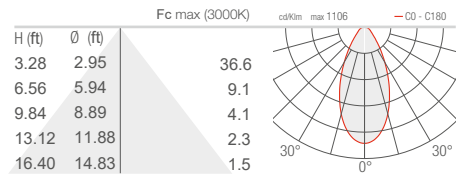


ALTOPIANO 2


S - 16° CRI 80

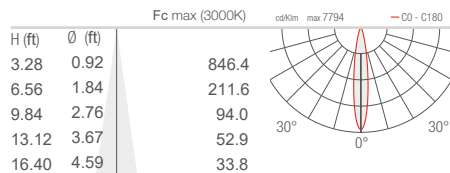


M - 26° CRI 80

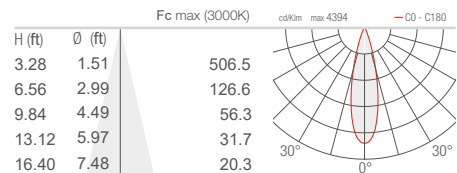


L - 38° CRI 80

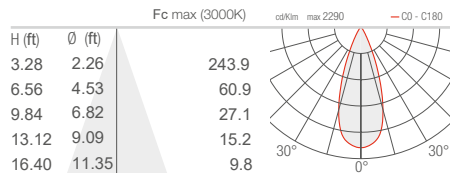


K - 57° CRI 80

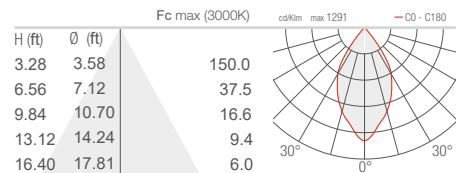






W - 16°x67° CRI 80

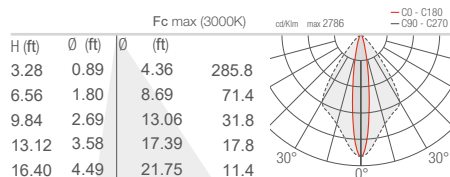

D - Diffuse CRI 80

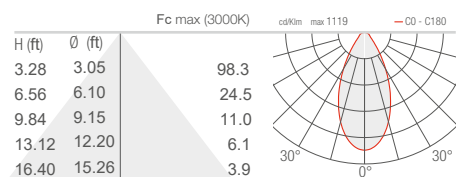

ALTOPIANO 3

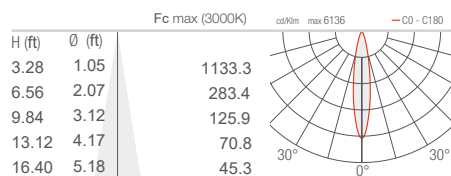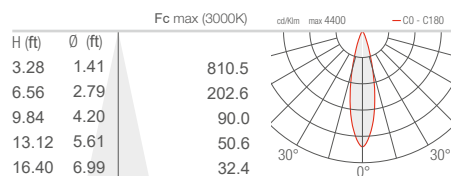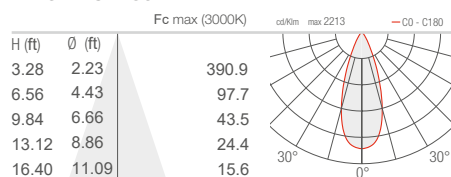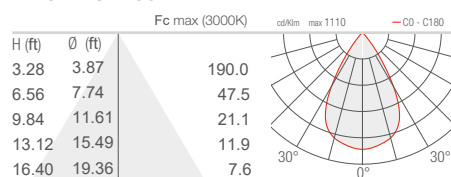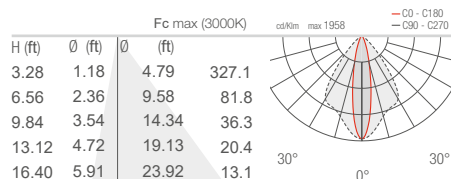S - 18° CRI 80**M** - 24° CRI 80**L** - 37° CRI 80**K** - 61° CRI 80**W** - 20°x72° CRI 80**D** - Diffuse CRI 80