


BEAM WALL is a wall-mounted, IP65-rated luminaire with a symmetrical light beam perfect for illuminating walkways, driveways or patios. It offered in 20W with spot, wide and diffused optics, and 4 standard finishes.



TECHNICAL DATA

Wattage	20W, 18W - diffuse version
Power Supply	Integral 120VAC - On/Off Remote for 0-10V Dimming (Consult Factory)
Construction	Body: Die-cast Aluminum EN47100 Screws: Stainless Steel Lens: Opal or Transparent Polycarbonate
CCT	2700K, 3000K
BUG Rating	B1-U1-G0 (15°, 60°) B0-U1-G0 (Diffuse)
CRI	>90
Delivered Lumens	585 lm (15°, 3000K) 560 lm (60°, 3000K)
Efficacy	65 lm/W (15°, 3000K) 62 lm/W (60°, 3000K)
Optics	15°, 35°, 60°, Diffuse
Finishes	4 Standard, See Below
Fixture Dimensions	Ø5.8" x 7.6" l x 2.9" h
Fixture Weight	2.87 lbs
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions



ORDERING INFORMATION

Example: LNBE70PARSHBBZL.US. Accessories ordered separately.

					US
Model No.	Optics	CCT	Purchase Code	Finish	
LNBE70PAR (20W)	S - Spot 15° M - Medium 35° W - Wide Flood 60°	H - 3000K Y - 2700K	BBZ	L - Graphite H - Gray V - Oxide U - White	US
LNBE71PAR (18W)	D - Diffuse 115°	H - 3000K Y - 2700K	BDZ		

Job Name/Date:


Fixture Type Designation:

ACCESSORIES

0404M004 - SINGLE CONNECTION IP68


PHOTOMETRIC DATA

Maximum Candela = 5013.4

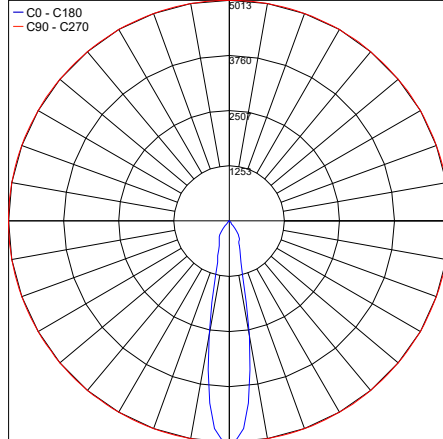


PHOTOMETRIC FILENAME : BEAM 20W 15° 30K_BE70PARSHBZX.IES

Maximum Candela = 1171.7

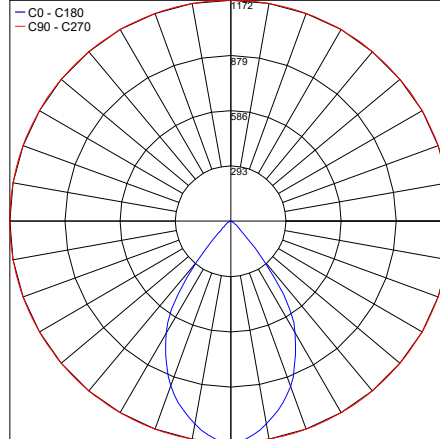

PHOTOMETRIC FILENAME : BEAM 20W 60° 30K_BE70PARWHBZX.IES

Maximum Candela = 198.2

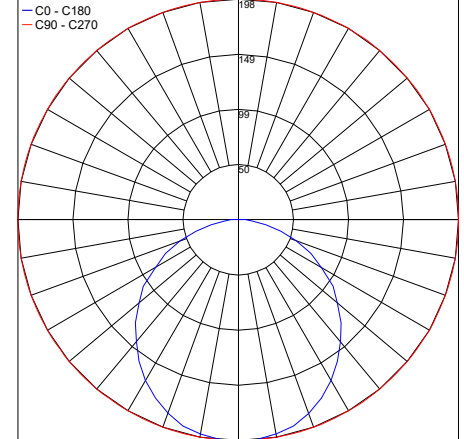

PHOTOMETRIC FILENAME : BEAM DIFFUSE 30K_BE71PARDHBDZX.IES

Job Name/Date:

Fixture Type Designation: