


Lako is an IP65-rated, asymmetrical luminaire that is available as a bollard or wall-mounted cylindrical fixture with a single or double diffused light beam. The Lako bollard is available in 3 different heights, 3000K as standard, and a graphite or oxide powder paint finish. Dark Sky compliant for output below 80°.



## TECHNICAL DATA

<b>Wattage</b>	6W
<b>Power Supply</b>	Remote 400mA, not included. See page 2.
<b>Construction</b>	Body: Die-Cast Extruded Aluminum Lens: Opal polycarbonate
<b>CCT</b>	3000K
<b>BUG Rating</b>	B0-U1-G0
<b>CRI</b>	>90
<b>Delivered Lumens</b>	108 lm per beam Dark Sky compliant, output below 80°
<b>Efficacy</b>	18 lm/W per beam
<b>Optics</b>	Asymmetric
<b>Finishes</b>	Graphite, Oxide
<b>Fixture Dimensions</b>	Ø2.4" x 7.1" / 15.8" / 23.6"
<b>Lumen Maintenance</b>	L70 >50,000hrs (Ta 40°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK08

Fixture Dimensions

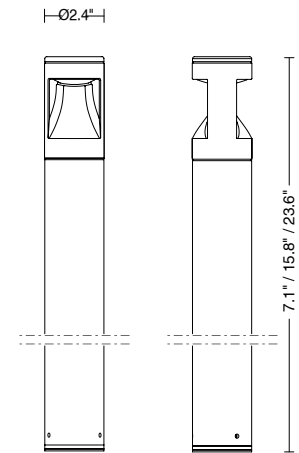

## ORDERING INFORMATION

Example: LNLA20040AHB7ZL.US.

LNLA20			H	B7Z		US
Model No.	Height	Optics	CCT		Finish	
LNLA20	018 - 7.1" (18 cm) 040 - 15.8" (40 cm) 060 - 23.6" (60 cm)	A - Single Asymmetric 4 - Double Asymmetric	H - 3000K	B7Z	L - Graphite V - Oxide H - Gray	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

400mA

Part Number	Description	Input/Output	# of Fixtures	
			SINGLE	DOUBLE
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 400mA, 10W, Class 2, DAMP	1-1	—
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 400mA, 20W, Class 2, DAMP	1-2	1-1
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 400mA, 30W, Class 2, DAMP	1-3	1-1
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 350mA, 100W Class 2	1-3 (1-12)	1-1 (1-4)

For other power supply options consult factory.

## ACCESSORIES - Installation


### 00A409

Root Mounting Kit


## PHOTOMETRIC DATA

Note: All photometric data is 3000K

Maximum Candela = 73.3

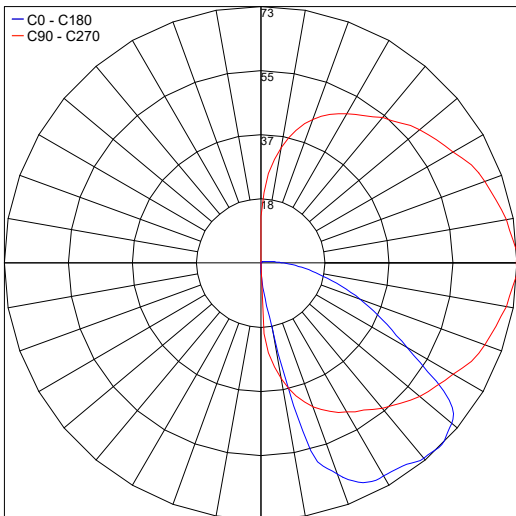

Maximum Candela = 73.3

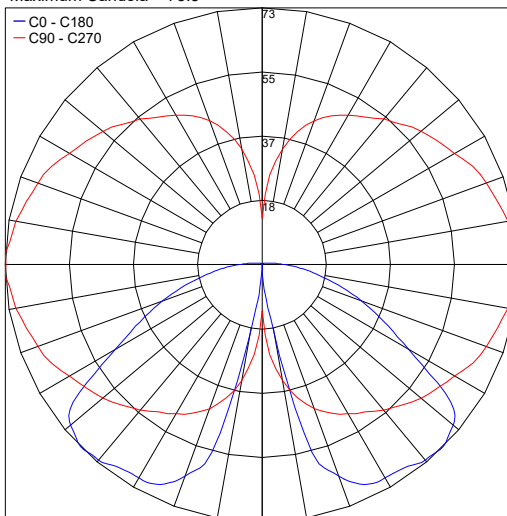

Job Name/Date:

Fixture Type Designation: