

LYRAS 80 - WALL


LYRAS 80 WALL is a single or double beam, wall-mounted, Ø3.4" cylinder luminaire that can be suitable for outdoor installation thanks to its IP66 rating. It is available with spot, medium or wide flood optics, and 2 standard finishes.



TECHNICAL DATA

Wattage	6.4W Single (4.5W LED) 12W Double (9W LED)
Power Supply	Integral 120-277VAC
Dimming	On/Off - Dimmable on Request
Construction	Body: Die-Cast Aluminum Lens: Extra-clear Tempered Glass 0.31" (8 mm)
CCT	3000K, 4000K
BUG Rating	B1-U0-G0 (Lyras 80 Single 14°, 32°, 54°) B1-U3-G0 (Lyras 80 Double 14°, 32°, 54°)
CRI	>90
Delivered Lumens	400 lm per beam (14°, 3000K) 384 lm per beam (32°, 3000K) 384 lm per beam (54°, 3000K)
Efficacy	62.5 lm/W per beam (14°, 3000K) 61 lm/W per beam (32°, 3000K) 61 lm/W per beam (54°, 3000K)
Optics	14° (Spot), 32° (Medium), 54° (Wide Flood)
Finishes	Graphite, Gray
Fixture Dimensions	Ø3.4" x 6.8"
Lumen Maintenance	L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

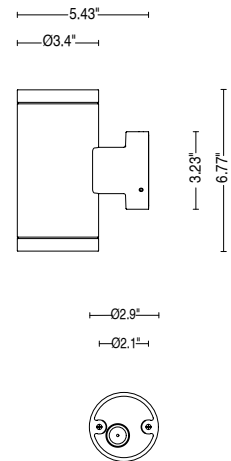

ORDERING INFORMATION

Example: LNL50PARSHBAZH.US.

LNL50PAR			BAZ		US
Model No.	Optics	CCT	BAZ	Finish	
LNL50PAR	S - 14° Spot M - 32° Medium W - 54° Wide Flood 1 - Double 14° Spot 2 - Double 32° Medium 3 - Double 54° Wide 6 - Double Spot 14° / Wide 54°	H - 3000K N - 4000K		L - Graphite H - Gray	US


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: All photometric data is 3000K

Maximum Candela = 3080.3

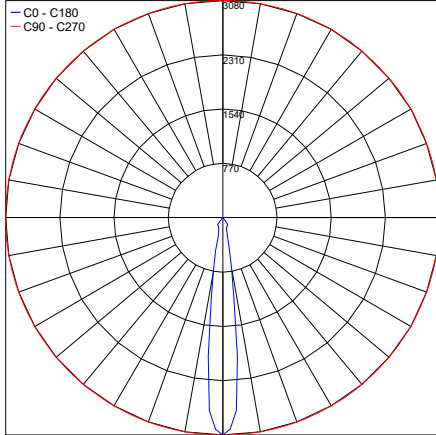


PHOTOMETRIC FILENAME : LYRAS 80 WALL 30K SINGLE SPOT 14° - LY50PARSHB10X.IES

Maximum Candela = 711.9

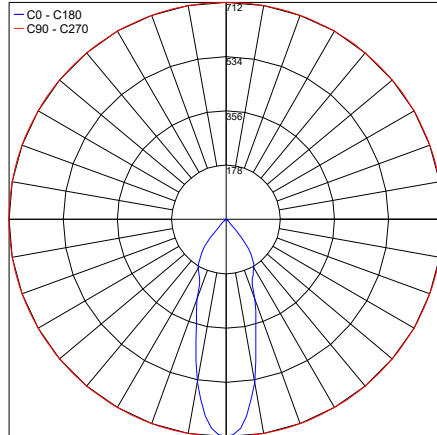


PHOTOMETRIC FILENAME : LYRAS 80 WALL 30K SINGLE MEDIUM 32° - LY50PARMHB10X.IES

Maximum Candela = 457.6

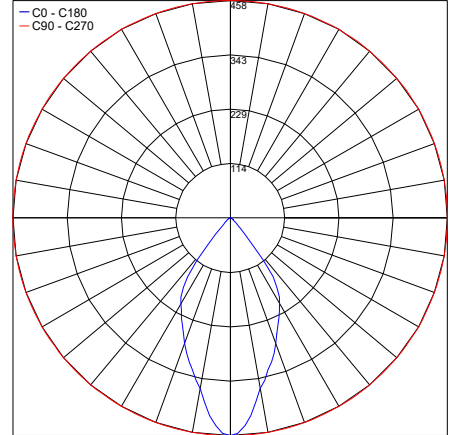


PHOTOMETRIC FILENAME : LYRAS 80 WALL 30K SINGLE WIDE 54° - LY50PARWHB10X.IES

Maximum Candela = 3080.3

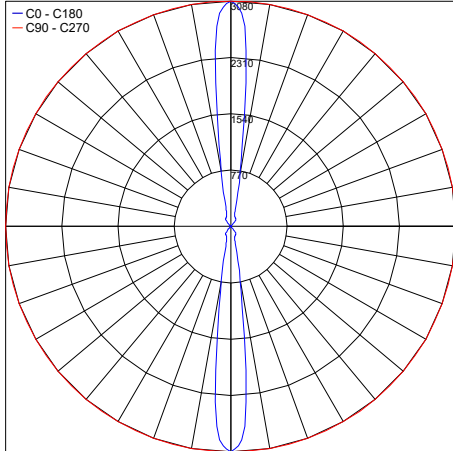


PHOTOMETRIC FILENAME : LYRAS 80 WALL DOUBLE SPOT - LY50PAR1_B10.IES

Maximum Candela = 711.9

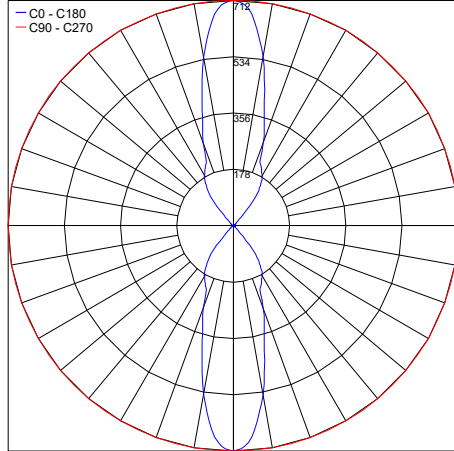

PHOTOMETRIC FILENAME : LYRAS 80 WALL DOUBLE MEDIUM - LY50PAR2_B10.IES

Maximum Candela = 457.6

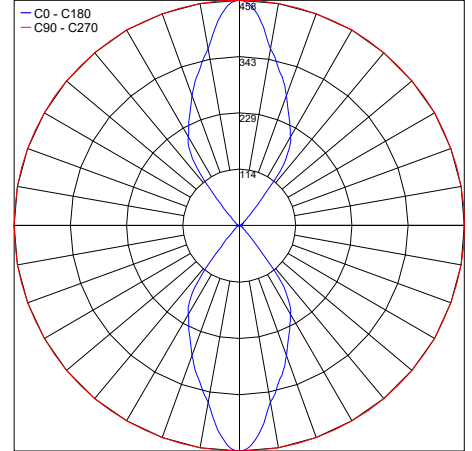

PHOTOMETRIC FILENAME : LYRAS 80 WALL DOUBLE WIDE - LY50PAR3_B10.IES

Job Name/Date:

Fixture Type Designation: