

MORPHIS 1 WALL


Morphis 1 Wall is a wall mounted LED lamp that creates the perfect solution for many situations and environments. It comes with a transparent or opal polycarbonate lens with diffuse optics and is available in 6 standard finishes.



TECHNICAL DATA

Wattage	18W total (15W LED)
Power Supply	Remote 500mA, not included. See page 2.
Construction	Body: Die-Cast Aluminum Lens: Extra-Clear or Opal Polycarbonate
CCT	3000K, 4000K (other colors on request)
BUG Rating	B1-U2-G1 (Extra Clear) B0-U3-G1 (Opal)
CRI	>90
Delivered Lumens	750 lm (3000K, Extra Clear Diffuser) 600 lm (3000K, Opal Diffuser)
Efficacy	42 lm/W (3000K, Extra Clear Diffuser) 34 lm/W (3000K, Opal Diffuser)
Optics	Diffuse
Finishes	6 Standard, See Below
Fixture Dimensions	14.5" l x 11.0" w x 7.7"
Lumen Maintenance	L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions

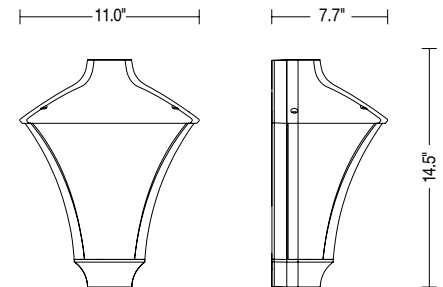

ORDERING INFORMATION

Example: LNMO30PARDHBBZP.US. Accessories / Power Supplies ordered separately.

LNMO3			BBZ		US
Model No.	Optics	CCT	BBZ	Finish	US
LNMO3	0PARD - Extra Clear Diffuse 3PARD - Opal Diffuse	H - 3000K N - 4000K		G - Black S - Black/Copper P - Black/Green R - Black/Silver L - Graphite V - Oxide	

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00465-P	0-10V Dimming (to 1.0%)	120-277VAC to 500mA, 20W, Class 2, DAMP	1-1
PPLT00527	Phase Dim (120V only)	120VAC to 500mA, 25W, Class 2, IP66	1-1
PPLT00262	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	1-1
PPLT00309-P	0-10V Dimming (to 0.1%)	120-277VAC to 500mA, 50W, Class 2	1-1
PPLT00538-P	0-10V Dimming (to 0.1%)	120-277VAC to 500mA, 100W, Class 2	1-1 (1-4)

For other power supply options consult factory.



ACCESSORIES - Installation

00596

Corner bracket

PHOTOMETRIC DATA

Note: All photometric data is 3000K

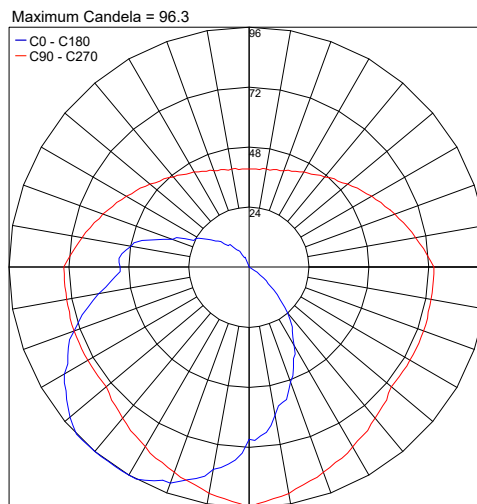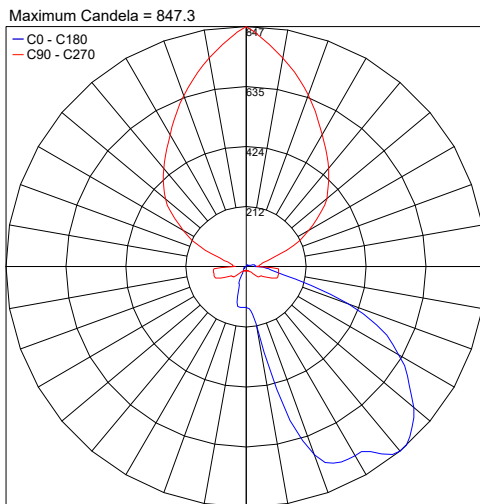

Job Name/Date:

Fixture Type Designation: