

Classicism and technology.



morphis

design by Innocenzo Rifino & Lorenzo Ruggieri

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



morphis_1

Morphis_1 is the tradition, a luminaire able to live in many solutions and environments. The Morphis_1 wall lamp has 15W power and a transparent or opal polycarbonate screen with diffusing optics. The optimizations made on the component couplings perfectly define the light emission. The body is in die-cast aluminum and available in six external finishing options, for a sophisticated final design, ideal for access corridors and external facades.

MORPHIS_3 | PENDANT

MORPHIS_1 | BOLLARD

MORPHIS_1 | POLE

MORPHIS_2 | POLE

MORPHIS_3 | POLE





morphis_1

DIFFUSE

| 15W



TECHNICAL SPECIFICATIONS

Source lamp

Total wattage

Voltage

Control

Light color

Delivered lumens

*Source lumens

Luminous efficacy

McADAM steps

Beam

CRI

Life time

IP rating

IK rating

DIFFUSE (EXTRA CLEAR)

LED 15W

18W

Remote 500mA, 50-60 Hz

On/Off • dimmable on request

3000K • 4000K • other colors on request

750 lm (1700 lm*) @ 3000K

800 lm (1800 lm*) @ 4000K

42 lm/W @ 3000K

45 lm/W @ 4000K

3

Diffuse

> 90

L70 > 50.000 h Ta 40°C

IP65

IK08

DIFFUSE (OPAL)

LED 15W

18W

Remote 500mA, 50-60 Hz

On/Off • dimmable on request

3000K • 4000K • other colors on request

600 lm (1700 lm*) @ 3000K

630 lm (1800 lm*) @ 4000K

34 lm/W @ 3000K

35 lm/W @ 4000K

3



Diffuse


> 90

L70 > 50.000 h Ta 40°C

IP65

IK08



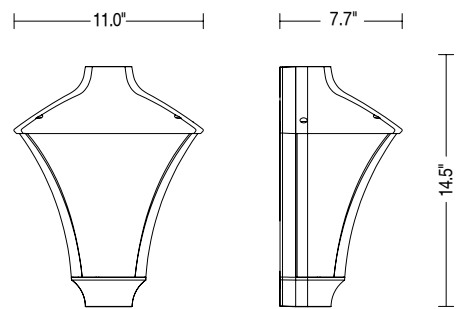

MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Extra clear or opal polycarbonate
Finishing	Polyester powder paint

ORDER CODE

MO 3 _ PAR D _ BBZ _		
		Finishing
	G	Black
	S	Black/copper
	P	Black/green
	R	Black/silver
	L	Graphite
	V	Oxide
		Light color
	N	4000K
	H	3000K
		Diffuser
	0	Extra clear
	3	Opal
Example	MO 3 0 PAR D N B BZ L	







morphis_2

A classic wall lamp, with all the Landa's technology and innovation. Diffusing light ideal for all applications for a luminaire with transparent polycarbonate screen. The optimizations made on the component couplings allow perfect definition of the light emission. Morphis_2 can be wall-mounted with shelf for suspended luminaires and 29W power.

MORPHIS_3 | PENDANT
MORPHIS_1 | BOLLARD
MORPHIS_1 | POLE
MORPHIS_2 | POLE
MORPHIS_3 | POLE





morphis_2

DIFFUSE

29W



TECHNICAL SPECIFICATIONS

Source lamp

DIFFUSE

LED 29W

Total wattage

30W

Voltage

700mA, 50-60 Hz

Control

On/Off • dimmable on request

Light color

3000K • 4000K • other colors on request

Delivered lumens

1700 lm (3400 lm*) @ 3000K

*Source lumens

1800 lm (3600 lm*) @ 4000K

Luminous efficacy

48 lm/W @ 3000K

52 lm/W @ 4000K

McADAM steps

3

Beam

Diffuse

CRI

> 90

Life time


L70 > 50.000 h Ta 40°C

IP rating

IP65


IK rating

IK08

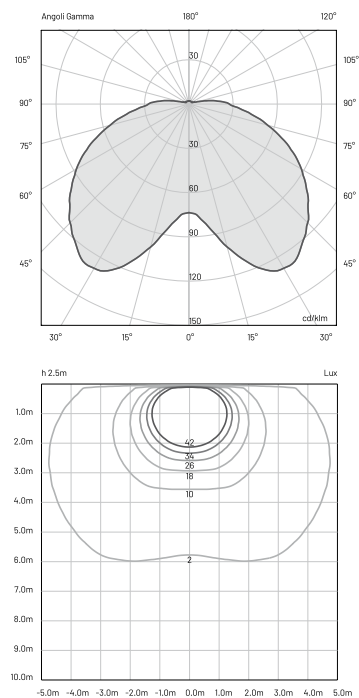

MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Extra clear polycarbonate
Finishing	Polyester powder paint

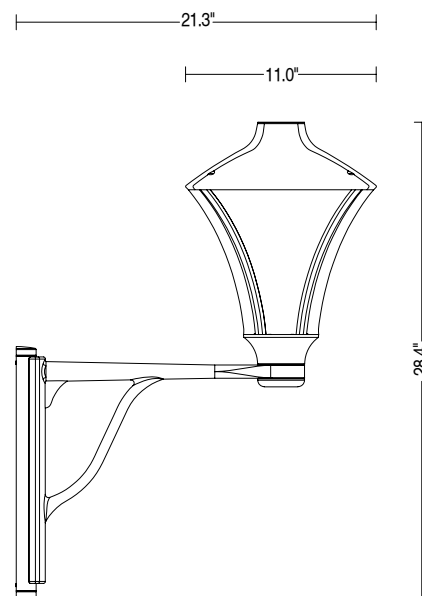

ORDER CODE

MO 4 0 PAA D _ BDZ _

Finishing

G	Black	
S	Black/copper	
P	Black/green	
R	Black/silver	
L	Graphite	
V	Oxide	

Light color

N	4000K
H	3000K

Example

MO 4 0 PAA D N B D Z L



AVAILABLE ACCESSORIES

Code	Description
00596	Corner bracket





morphis_3

Morphis_3, with 29W power, offers an additional possibility of application by means of a shelf for suspended luminaires. The six aesthetic finishing solutions offer the installer many aesthetic possibilities. Its diffused light is precise thanks to the extra-clear transparent polycarbonate screen. A perfect solution for porches and external facades of homes and outdoor common areas, thanks to the optimizations made on the component couplings, which not only perfectly define the light emission, but also increase the product resistance in all external situations.

MORPHIS_3 | PENDANT

MORPHIS_1 | BOLLARD

MORPHIS_1 | POLE

MORPHIS_2 | POLE

MORPHIS_3 | POLE





morphis_3

DIFFUSE

29W



TECHNICAL SPECIFICATIONS

Source lamp

DIFFUSE

LED 29W

Total wattage

30W

Voltage

700mA, 50-60 Hz

Control

On/Off • dimmable on request

Light color

3000K • 4000K • other colors on request

Delivered lumens

1700 lm (3400 lm*) @ 3000K

*Source lumens

1800 lm (3600 lm*) @ 4000K

Luminous efficacy

48 lm/W @ 3000K

52 lm/W @ 4000K

McADAM steps

3

Beam

Diffuse

CRI

> 90

Life time


L70 > 50.000 h Ta 40°C

IP rating

IP65

IK rating

IK08

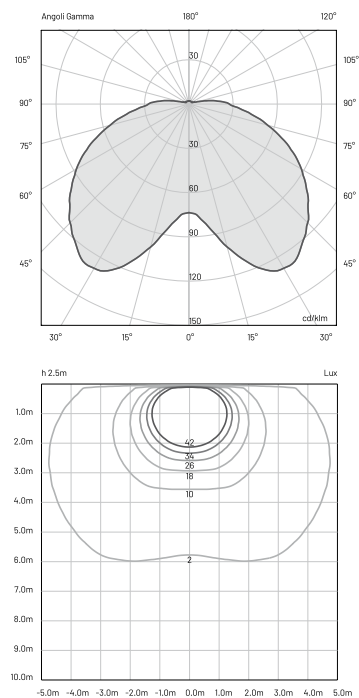


MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Extra clear polycarbonate
Finishing	Polyester powder paint

ORDER CODE

MO 4 1 PAB D _ B D Z _	
Finishing	G Black
	S Black/copper
	P Black/green
	R Black/silver
	L Graphite
	V Oxide
Light color	N 4000K
	H 3000K
Example	MO 4 1 PAB D N B D Z L

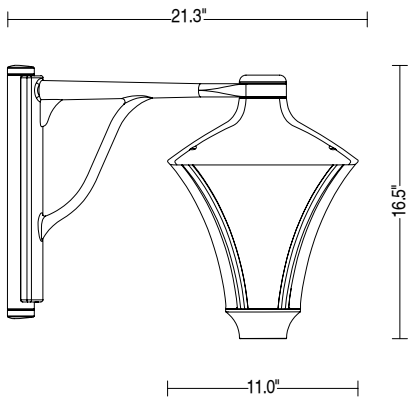

AVAILABLE ACCESSORIES

Code	Description
00596	Corner bracket

morphis_4

Tradition, technology and design for a device that can live in multiple solutions and environments. Morphis_4 closes the circle of the Morphis range. Diffuse optics with opal polycarbonate diffuser, 29W power and six aesthetic finish solutions. The luminaire is wall-mounted by means of a 90° arm; the design of the die-cast aluminum body is compact and non-invasive for uniform and penetrating zenithal light. All the optimizations made on the component couplings allow perfect definition of the light output.

MORPHIS_4 | CEILING LAMP >
MORPHIS_4 | PENDANT
MORPHIS_4 | POLE





morphis_4

DIFFUSE

29W



TECHNICAL SPECIFICATIONS

Source lamp

DIFFUSE

LED 29W

Total wattage

33W

Voltage

700mA, 50-60 Hz

Control

On/Off • dimmable on request

Light color

3000K • 4000K • other colors on request

Delivered lumens

1550 lm (3400 lm*) @ 3000K

*Source lumens

1650 lm (3600 lm*) @ 4000K

Luminous efficacy

44 lm/W @ 3000K

47 lm/W @ 4000K

McADAM steps

3

Beam

Diffuse

CRI

> 90

Life time


L70 > 50.000 h Ta 40°C

IP rating

IP65


IK rating

IK08

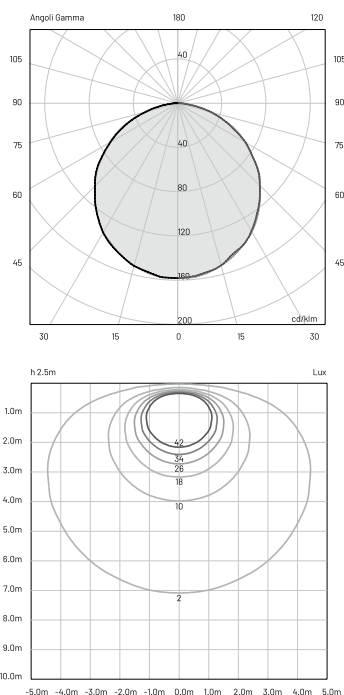

MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Opal polycarbonate
Finishing	Polyester powder paint

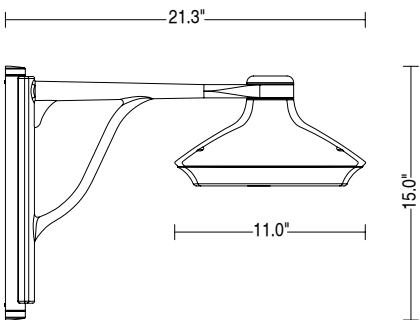

ORDER CODE

M0 4 2 PAB D _ B D Z _	
Finishing	G Black ●
	S Black/copper ●
	P Black/green ●
	R Black/silver ●
	L Graphite ●
	V Oxide ●
Light color	N 4000K
	H 3000K
Example	M0 4 2 PAB D N B D Z L



AVAILABLE ACCESSORIES

Code	Description
00596	Corner bracket

