

The  
invisible  
recessed  
projector.

mira 45 LT


design by Landa R&D

designplan® 

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042

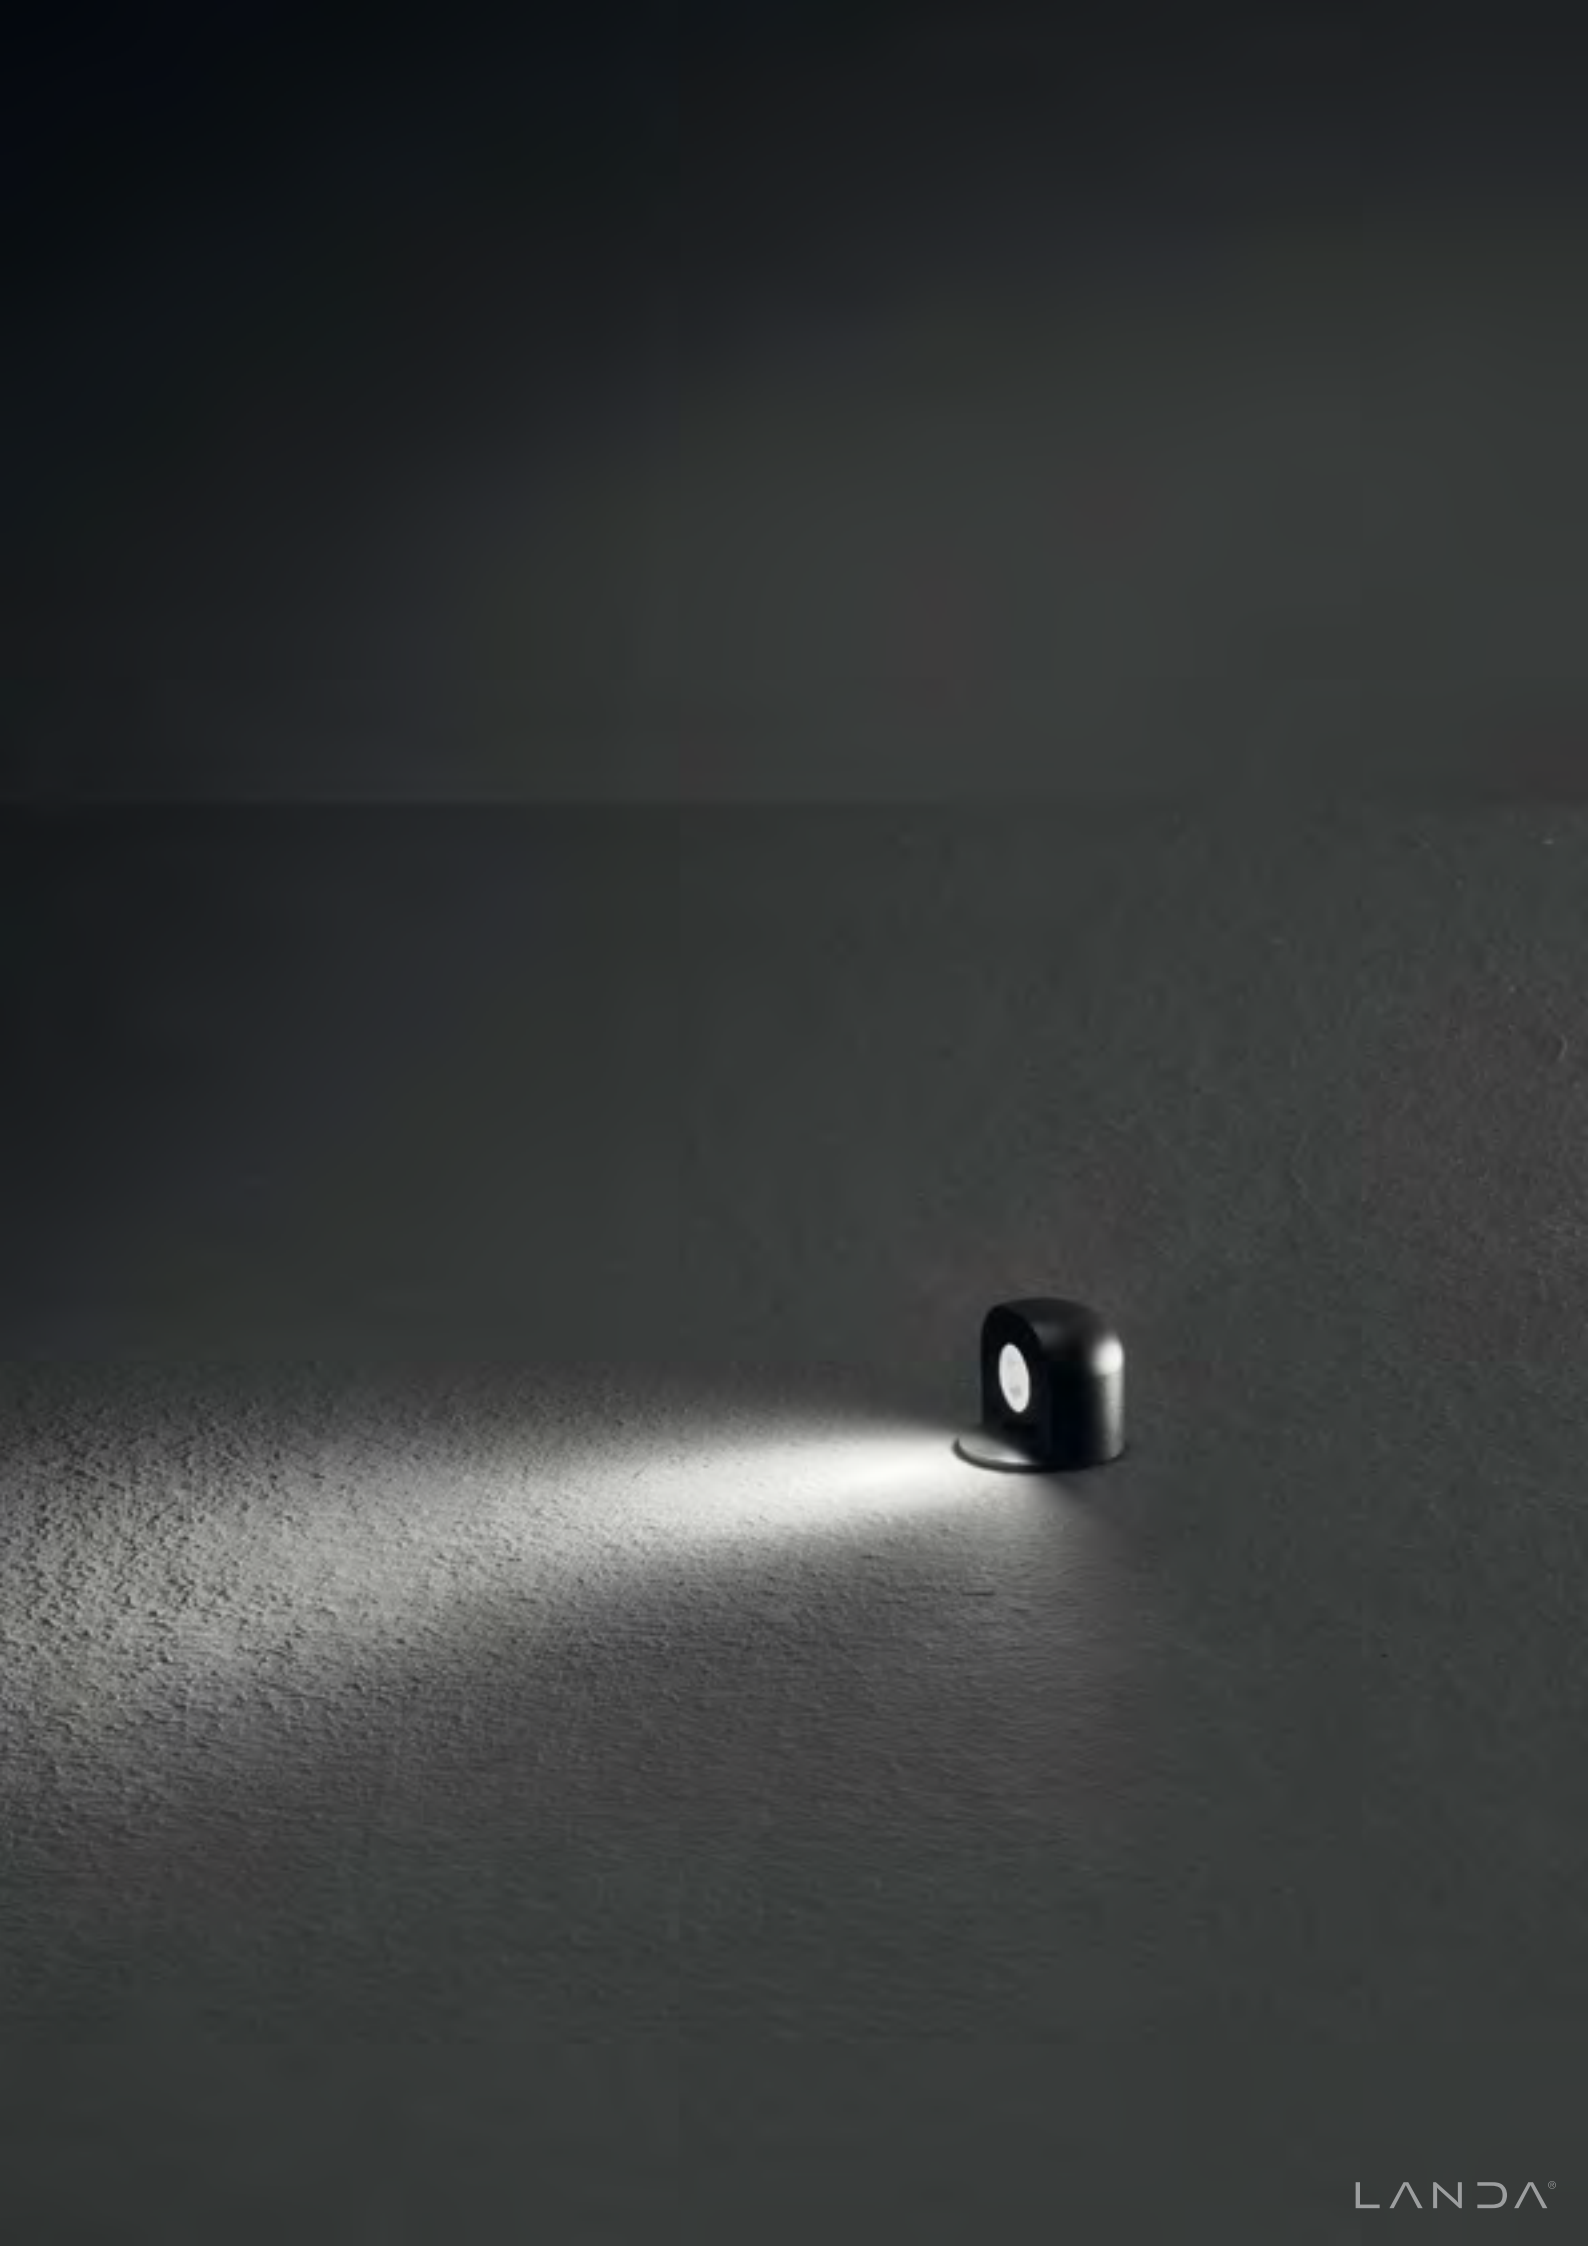

# mira 45 LT

*A combination of technology and functionality. Mira 45 LT is an ideal projector for in-ground installations, available with 2W power and spot and flood optics. A warm or cold light, depending on the construction requirements. The stainless steel and bronze finishes are both available to the designer for high performance and versatile installation possibilities. A recessed luminaire with 3D aesthetics, for systematic, precise lighting, suitable for all outdoor walkways.*

*Also available for wall installation.*

**MIRA 45 LT | WALL RECESSED**





# mira 45 LT





SPOT • FLOOD

# | 2W




## TECHNICAL SPECIFICATIONS

	SPOT	FLOOD
Source lamp	LED 2W	LED 2W
Total wattage	2W	2W
Voltage	24VDC	24VDC
Control	Power supply not included • dimmable on request	Power supply not included • dimmable on request
Light color	3000K • 4000K • other colors on request	3000K • 4000K • other colors on request
Delivered lumens **Lumens at source	118 lm (160 lm**) @ 3000K 118 lm (160 lm**) @ 4000K	102 lm (160 lm*) @ 3000K 102 lm (160 lm*) @ 4000K
Luminous efficacy	59 lm/W @ 3000K 59 lm/W @ 4000K	51 lm/W @ 3000K 51 lm/W @ 4000K
McADAM steps	3	3
Beam	12°	35°
CRI	> 90	> 90
Life time	L70 > 50.000 h Ta 40°C	L70 > 50.000 h Ta 40°C
IP rating	IP66	IP66
IK rating	IK06	IK06

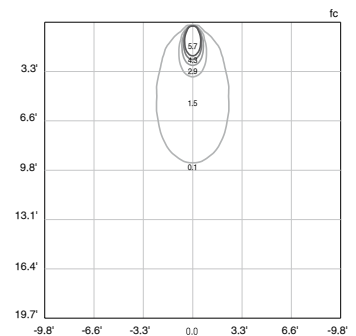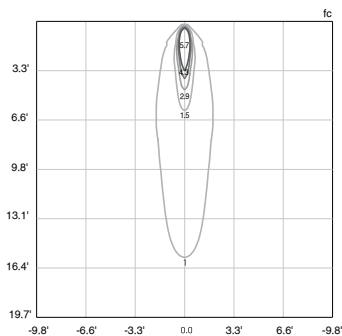

## MATERIALS

Body	Extruded aluminum EN AW6060
Diffuser	Extra clear polycarbonate
Finishing	Anodized



## ORDER CODE

MI 2 0 000	-	B 7 Z	-
		Finishing	H Gray
			L Graphite
		Light color	N 4000K
			H 3000K
		Beam	S Spot
			F Flood
	Example		MI 2 0 000 S N B 7 Z 1

## INCLUDED ACCESSORIES

Code	Description
-	3.3' (1 m) length cable -05RN-F
-	Housing box

## AVAILABLE ACCESSORIES

Code	Description
0409M009	Single connection IP68





