

MIRA 45 LT FLOOR


MIRA 45 LT Floor is an in-ground projector suitable for outdoor installation for systematic, precise lighting or pathways, driveways or other areas. It is available with 3 optics options, warm or cool light, and a gray or graphite finish.



TECHNICAL DATA

Wattage	2W
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Extruded Aluminum Lens: Extra Clear or Frosted Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U3-G0
CRI	>90
Delivered Lumens	118 lm (3000K, Spot) 102 lm (3000K, Flood)
Efficacy	59 lm/W (3000K, Spot) 51 lm/W (3000K, Flood)
Optics	Spot 12°, Flood 35°, 20°x50°
Finishes	Gray, Graphite
Fixture Dimensions	Ø1.7" x 2.8"
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP66
Impact Resistance	IK06

Fixture Dimensions



ORDERING INFORMATION

Example: LNMI23000FHB7ZLF.US. Accessories / Power Supplies ordered separately.

LNMI23000			B7Z		F	US
Model No.	Optics	CCT		Finish		
LNMI23000	F - Flood 35° S - Spot 12° E - 20°x50°	Y - 2700K H - 3000K N - 4000K	B7Z	H - Gray L - Graphite	F - Floor	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2, IP67	5-40
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-40

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures 2W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-38

For other power supply options consult factory.

ACCESSORIES - Installation

(included)

3.28' (1 m) length cable -05RN-F


Housing Box

Also available: Single Connection IP68


PHOTOMETRIC DATA

Note: All photometric data is 3000K


Maximum Candela = 233.3

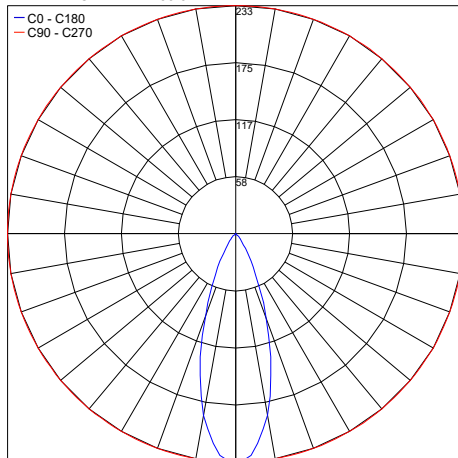

Maximum Candela = 1136.0

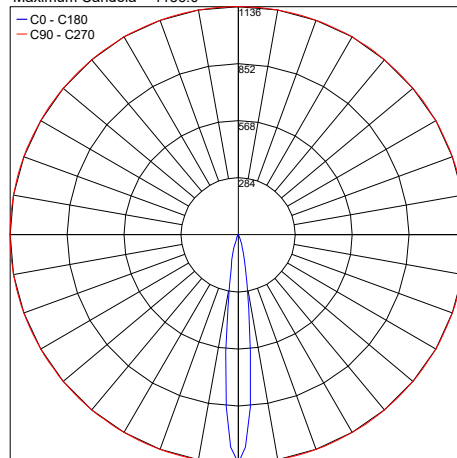

Maximum Candela = 1136.0

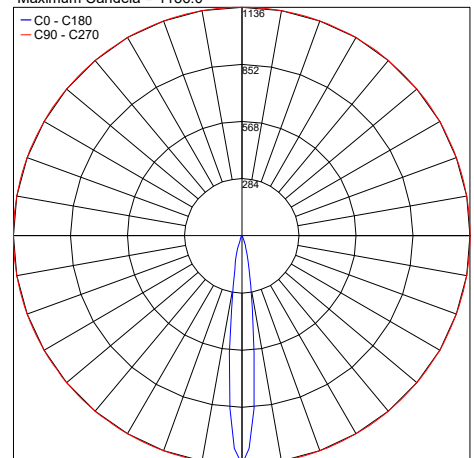

Job Name/Date:

Fixture Type Designation: