

# MIRA 45 LT WALL


MIRA 45 LT Wall is a recessed wall projector suitable for outdoor installation of patios and areas with walls. It is available with spot or flood optics, warm or cold light, and a gray or graphite finish. In-ground installation also available.



## TECHNICAL DATA

<b>Wattage</b>	2W
<b>Power Supply</b>	Remote 24VDC, not included. See page 2.
<b>Construction</b>	Body: Extruded Aluminum Lens: Extra Clear or Frosted Tempered Glass
<b>CCT</b>	3000K, 4000K
<b>BUG Rating</b>	B0-U3-G0
<b>CRI</b>	>90
<b>Delivered Lumens</b>	118 lm (3000K, Spot) 102 lm (3000K, Flood)
<b>Efficacy</b>	59 lm/W (3000K, Spot) 51 lm/W (3000K, Flood)
<b>Optics</b>	Spot 12°, Flood 35°
<b>Finishes</b>	Gray, Graphite
<b>Fixture Dimensions</b>	Ø1.7" x 2.8"
<b>Lumen Maintenance</b>	L70 >50,000hrs (Ta 40°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK06

Fixture Dimensions

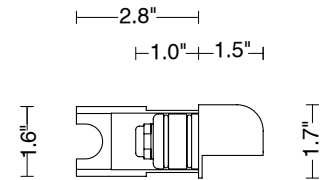

## ORDERING INFORMATION

Example: LNMI20000FHB7Z2W.US.

LNMI20000			B7Z		W	US
Model No.	Optics	CCT		Finish		
LNMI20000	S - Spot 12° F - Flood 35°	H - 3000K N - 4000K	B7Z	H - Gray L - Graphite	W - Wall	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00128</a>	Non-Dim	120VAC to 24VDC, 6W, Class 2, DAMP	1-1
<a href="#">PPLT00632</a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2, DAMP	1-4
<a href="#">PPLT00709</a>	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-38
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W Class 2, IP67	1-40

For other power supply options consult factory.

## ACCESSORIES - Installation

(included)

3.28' (1 m) length cable -05RN-F


Housing Box

**Also available:** Single Connection IP68


## PHOTOMETRIC DATA

Note: All photometric data is 3000K


Maximum Candela = 233.3

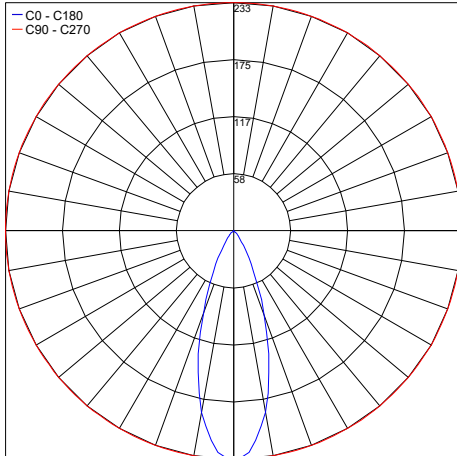

Maximum Candela = 1136.0

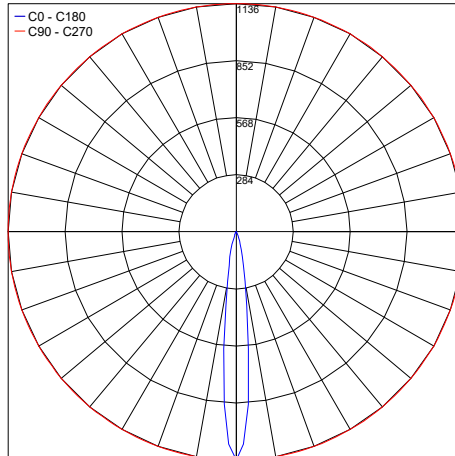

Maximum Candela = 1136.0

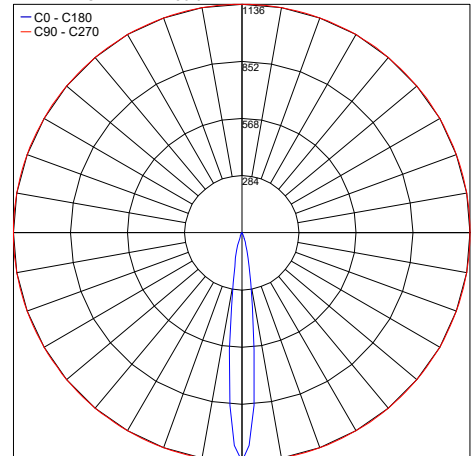

Job Name/Date:

Fixture Type Designation: