


MIRA 45 is a recessed LED uplight suitable for outdoor installation on paths, walkways or access corridors of all kinds. It is available with seven different optics - spot, flood, diffuse, 360°, 180°, 120° single version, 120° with double light beam and quadruple - and 2 standard finishes, gray or graphite. Also available for wall installation.

TECHNICAL DATA

Wattage	2W
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Extruded Aluminum Lens: Extra Clear or Frosted Tempered Glass
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U1-G0 (Quadruple) B0-U2-G0 (Double 120°, 120°, 180°, 360°, D) B0-U3-G0 (Flood, Spot)
CRI	>90
Delivered Lumens	118 lm (3000K, Spot) 102 lm (3000K, Flood) 17 lm (3000K, Diffuse)
Efficacy	59 lm/W (3000K, Spot) 51 lm/W (3000K, Flood) 8.5 lm/W (3000K, Diffuse)
Optics	8 Standard, See Below
Finishes	Gray, Graphite
Fixture Dimensions	Ø1.7" x 5.9"
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP67
Impact Resistance	IK08



Fixture Dimensions



Spot - Flood - Diffuse - Medium

**See page 2
for other dimensions**

ORDERING INFORMATION

Example: LNMI20IPTFHB7Z.US. Accessories / Power Supplies ordered separately.

LNMI20IPT			B7Z		US
Model No.	Optics	CCT		Finish	
LNMI20IPT	S - Spot 12° F - Flood 35° D - Diffuse 80° X - 360° T - 180° V - 120° 7 - Double 120° 9 - Quadruple	Y - 2700K H - 3000K N - 4000K	B7Z	H - Gray L - Graphite	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W Class 2, IP67	5-40
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-40

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures 2W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-38

*For other power supply options consult factory.**Job Name/Date:**Fixture Type Designation:*

ACCESSORIES - Installation

(included)


3.28' (1 m) length cable -05RN-F

Housing Box


Also available: Single Connection IP68

VARIATIONS


120°

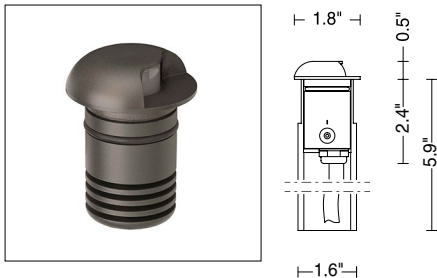


180°

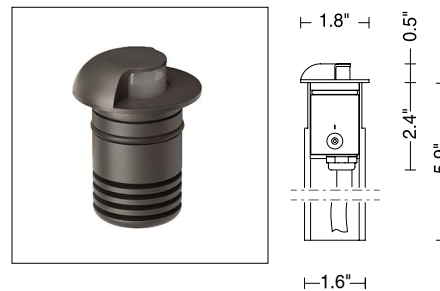


360°

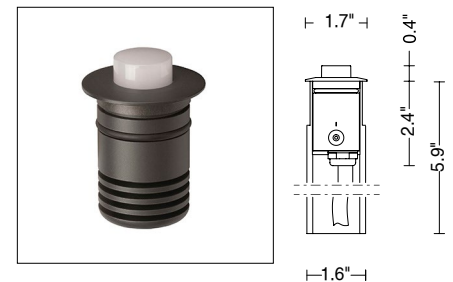

Double 120°

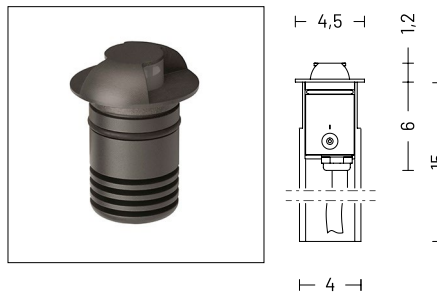

Quadruple

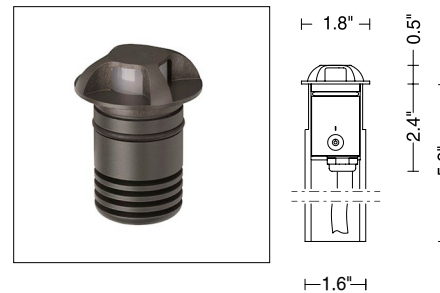


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note: All photometric data is 3000K

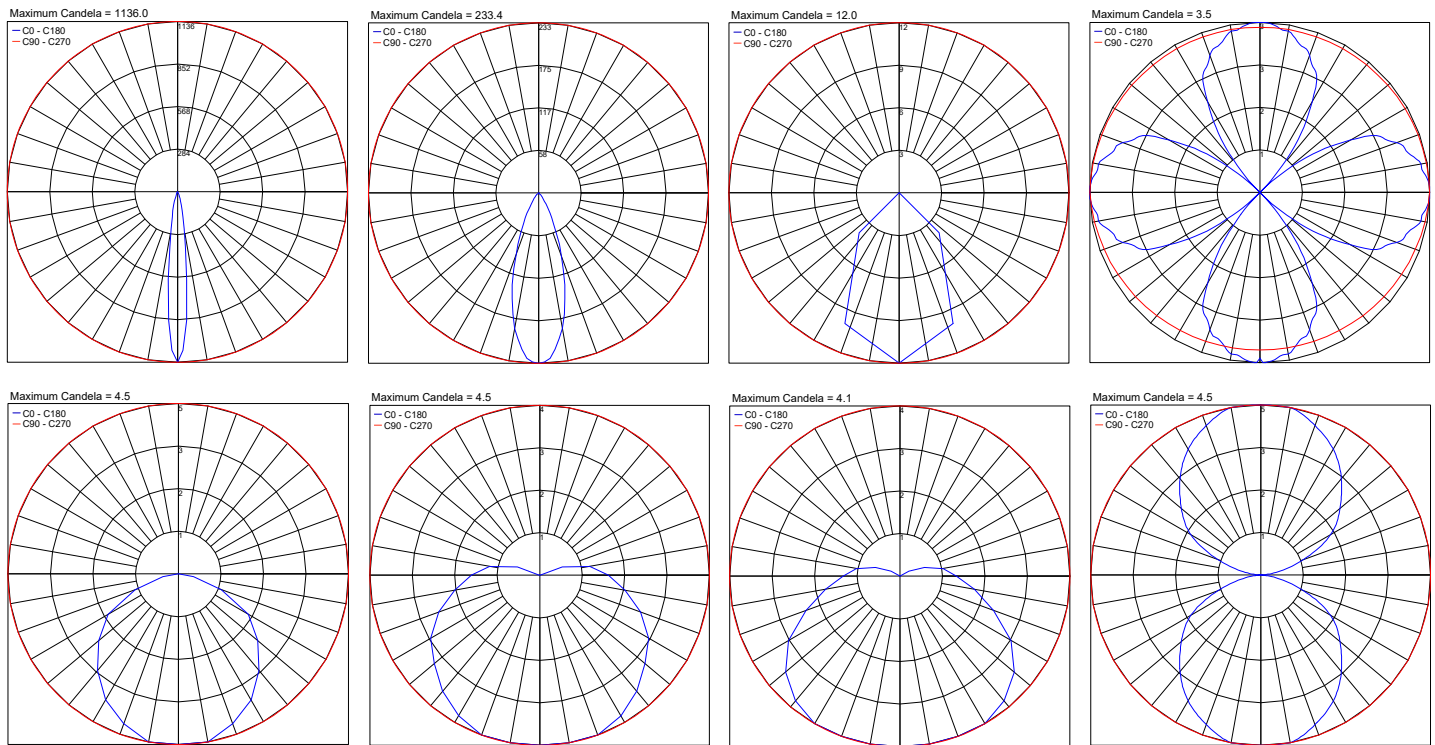

Job Name/Date:

Fixture Type Designation: