

# MIRA 65


MIRA 65 is a compact, recessed LED uplight suitable for outdoor installation, illuminating paths with precision as well as minimum impact. It is available with 10 different optics and 2 standard finishes, gray or graphite. Also available for wall installation.



## TECHNICAL DATA

|                           |  |   |
|---------------------------|--|---|
| <b>Wattage</b>            | 5W   |   |
| <b>Power Supply</b>       | Remote 24VDC, not included. See page 2.  |   |
| <b>Construction</b>       | Body: Extruded Aluminum<br>Lens: Extra Clear or Frosted Tempered Glass                   |   |
| <b>CCT</b>                | 3000K  |   |
| <b>BUG Rating</b>         | B0-U2-G0 (double 120°, 120°, 180°, quadruple)<br>B0-U3-G0 (Diffuse, 30°, 40°, 360°, 12°) |   |
| <b>CRI</b>                | >80  |   |
| <b>Delivered Lumens</b>   | 294 lm (Medium)<br>93 lm (Diffuse)<br>86 lm (360°)<br>33 lm (180°)                       | 21 lm (120°)<br>42 lm (Double 120°)<br>43 lm (Quadruple)        |
| <b>Efficacy</b>           | 58.8 lm/W (Medium)<br>18.6 lm/W (Diffuse)<br>17.2 lm/W (360°)<br>6.6 lm/W (180°)         | 4.2 lm/W (120°)<br>8.4 lm/W (120°/120°)<br>8.6 lm/W (Quadruple) |
| <b>Optics</b>             | 10 Standard, See Below   |   |
| <b>Finishes</b>           | Gray or Graphite   |   |
| <b>Fixture Dimensions</b> | Ø3.1" x 7.1"   |   |
| <b>Lumen Maintenance</b>  | L70 >50,000hrs (Ta 40°C)   |   |
| <b>Color Consistency</b>  | 3-Step MacAdam   |   |
| <b>IP Rating</b>          | IP67   |   |
| <b>Impact Resistance</b>  | IK08   |   |

Fixture Dimensions

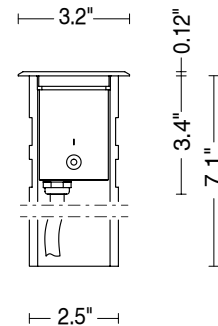

Spot - Flood - Diffuse - Medium

See page 2  
for other dimensions

## ORDERING INFORMATION

Example: LNMI30IPTDHB7Z1.US. Accessories / Power Supplies ordered separately.

| LNMI30IPT |  |  |  |  | US |
|-----------|--|--|--|--|----|
| Model No. | Optics   | CCT  | CRI  | Finish                                 |    |
| LNMI30IPT | <b>M</b> - Medium 30° (extra clear glass) <b>ONLY &gt;80</b><br><b>D</b> - Diffuse 90° (frosted glass) <b>ONLY &gt;80</b><br><b>X</b> - 360°<br><b>T</b> - 180°<br><b>V</b> - 120°<br><b>7</b> - Double 120°<br><b>9</b> - Quadruple<br><b>S</b> - Spot 12° (extra clear glass) <b>ONLY &gt;90</b><br><b>F</b> - Flood 40° (extra clear glass) <b>ONLY &gt;90</b><br><b>D</b> - Diffuse 90° (frosted glass) <b>ONLY &gt;90</b> | <b>H</b> - 3000K<br><b>N</b> - 4000K<br><i>Only available on CRI&gt;90</i> | <b>A10</b> - CRI>80<br><b>B7Z</b> - CRI>90 | <b>H</b> - Gray<br><b>L</b> - Graphite | US |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

| Part Number               | Description   | Input/Output                                  | # of Fixtures |
|---------------------------|---|---|---------------|
| <a href="#">PPLT00632</a> | 0-10V Dimming (Dim to Off)                              | 120-277VAC to 24VDC, 12W, Class 2, DAMP       | 1-1           |
| <a href="#">PPLT00056</a> | Non-Dim   | 120-277VAC to 24VDC, 26W, Class 2, DAMP, IP66 | 1-4           |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W Class 2, IP67       | 1-16          |

For other power supply options consult factory.

## ACCESSORIES - Installation

(included)


3.28' (1 m) length cable -05RN-F

Housing Box


Also available: Single Connection IP68

## VARIATIONS


120°

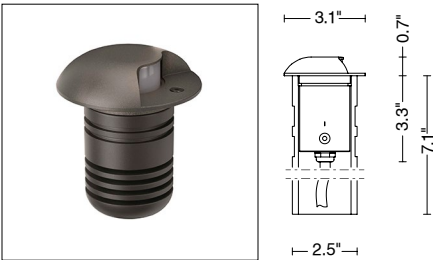


180°

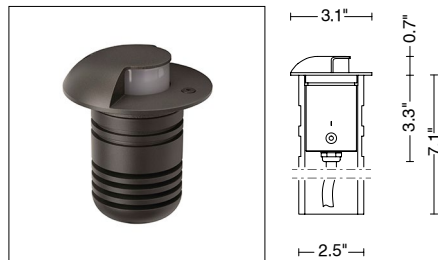


360°

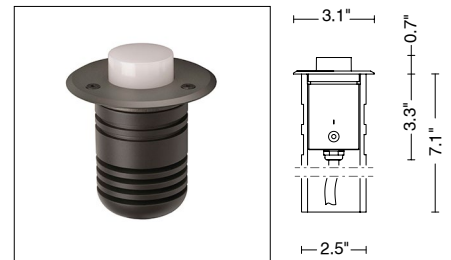

Double 120°

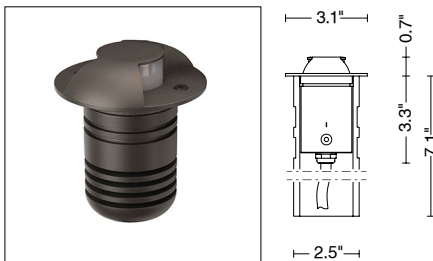

Quadruple

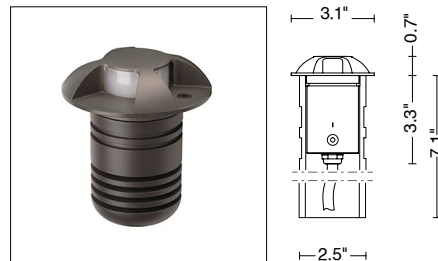


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA

Note: All photometric data is 3000K

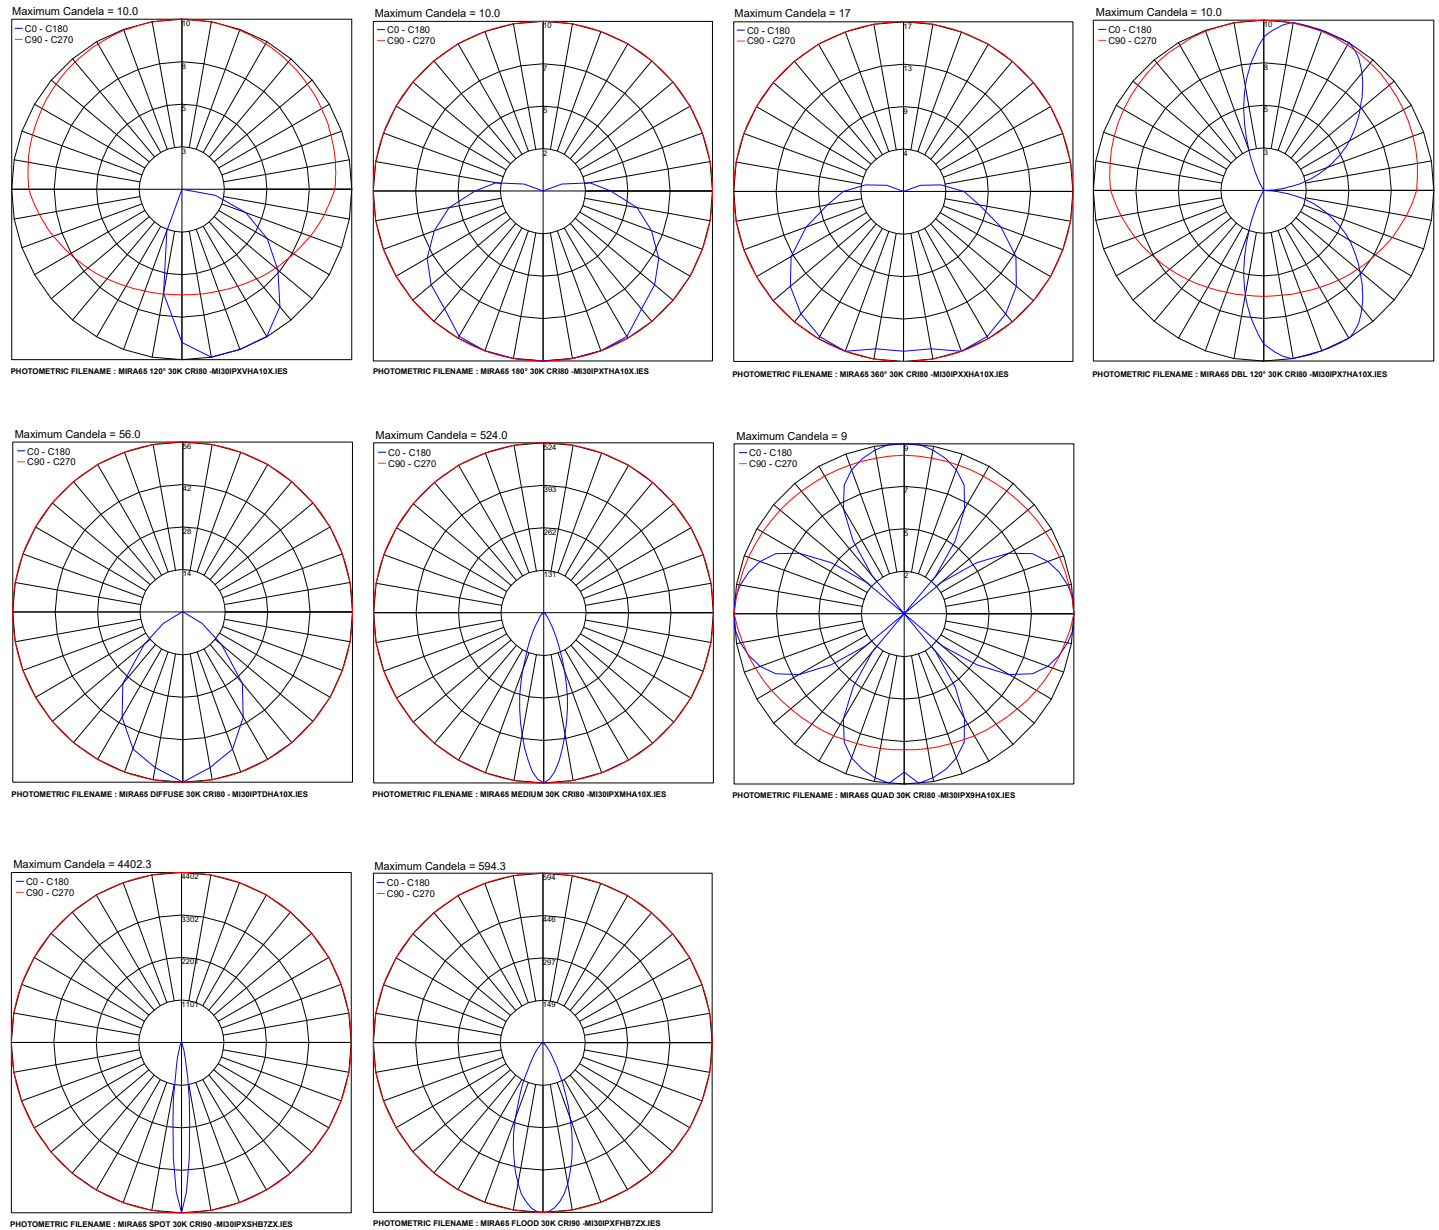

Job Name/Date:

Fixture Type Designation: