


NEWAY is an evocative and elegant, IP65-rated bollard made of die-cast aluminum and diffused light distribution. It is available in 5 different heights and 3 standard finishes.



TECHNICAL DATA

Wattage	12W
Power Supply	Integral 120-277VAC
Construction	Body: Die-Cast and Extruded Aluminum Lens: Extra Clear Polycarbonate
CCT	3000K, 4000K (other colors on request)
BUG Rating	B1-U3-G1
CRI	>90
Delivered Lumens	890 lm (3000K) 940 lm (4000K)
Efficacy	74.2 lm/W (3000K) 78.0 lm/W (4000K)
Optics	Diffuse
Finishes	3 Standard, See Below
Fixture Dimensions	Ø6.2" x 5 heights, See Below
Lumen Maintenance	L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions

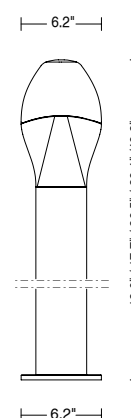

ORDERING INFORMATION

Example: LNNE50075DHBAZM.US. Accessories ordered separately.

LNNE50		D		BAZ		US
Model No.	Height	Optics	CCT	Finish		
LNNE50	035 - 13.78" (35 cm) 045 - 17.72" (45 cm) 075 - 29.53" (75 cm) 100 - 39.37" (100 cm) 125 - 49.21" (125 cm)	D - Diffuse	H - 3000K N - 4000K	L - Graphite H - Gray V - Oxide	BAZ	US

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation

(included)


00A405.01P - Anchor Bolt

00A405 - Root Mounting Kit

PHOTOMETRIC DATA

3000K


Maximum Candela = 222.2

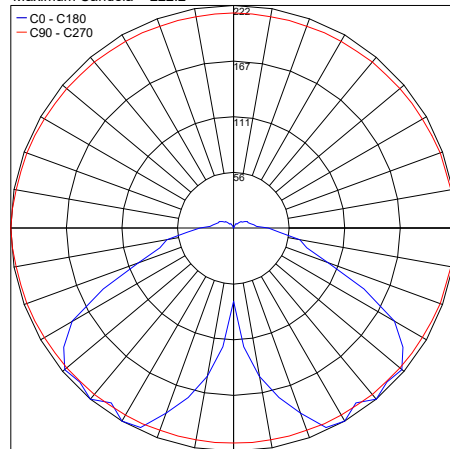

PHOTOMETRIC FILENAME : NEWAY 30K - NE50XXXDHB10X.IES

4000K

Maximum Candela = 244.4

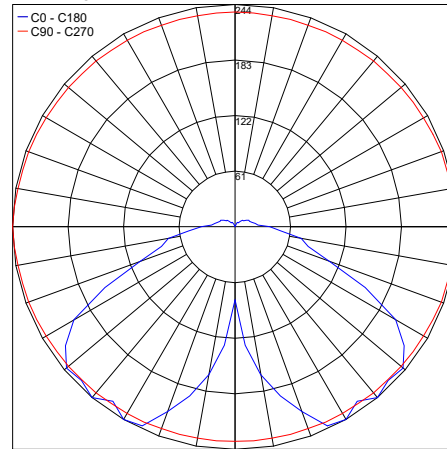

PHOTOMETRIC FILENAME : NEWAY 40K - NE50XXXDHB10X.IES

Job Name/Date:

Fixture Type Designation: