

Practical and formal.

titano

design by Landa R&D

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



titano

Titano is a 10W floor-standing luminaire available in different heights, easy to integrate and install in any outdoor environment. A simple shape for a practical and formal pole, robust and weatherproof. The light emission is diffusing, precise and uniform, also thanks to the extra-clear polycarbonate diffuser. Titano is available with AISI 316L stainless steel body or in the EN AW6060 extruded aluminum version with graphite or oxide finishing.





titano


DIFFUSE


10W



TECHNICAL SPECIFICATIONS

	DIFFUSE
Source lamp	LED 10W
Total wattage	12W
Voltage	120-277VAC, 50-60 Hz
Control	On/Off • dimmable on request
Light color	3000K • 4000K • other colors on request
Delivered lumens	890 lm (1200 lm*) @ 3000K
Lumens at Source	940 lm (1300 lm) @ 4000K
Luminous efficacy	74.2 lm/W @ 3000K 78 lm/W @ 4000K
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

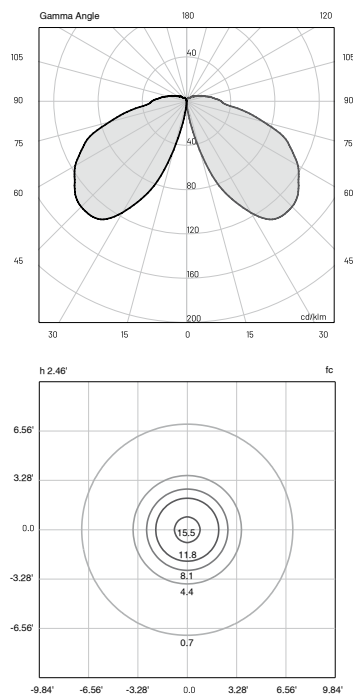

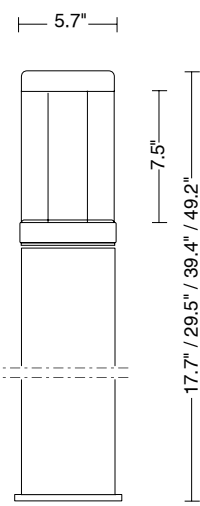

MATERIALS

Body	Extruded aluminum EN AW6060
Diffuser	Extra clear polycarbonate
Finishing	Polyester powder paint

ORDER CODE

TI 4 0	D	B 10	
			Finishing
			L Graphite
			V Oxide
			H Gray
			Light color
			N 4000K
			H 3000K
			Height
			045 17.7" (45 cm)
			075 29.5" (75 cm)
			100 39.4" (100 cm)
			125 49.2" (125 cm)
			Example
			TI 4 0 045 D H B 10 L

AVAILABLE ACCESSORIES

Code	Description
00A400.01P	Anchor bolt
00A400	Root mounting kit
0404M004	Single connection IP68
0404M003	Loop-in loop-out IP68



titano_inox


DIFFUSE

10W



TECHNICAL SPECIFICATIONS

	DIFFUSE
Source lamp	LED 10W
Total wattage	12W
Voltage	120-277VAC, 50-60 Hz
Control	On/Off • dimmable on request
Light color	3000K • 4000K • other colors on request
Delivered lumens	890 lm (1200 lm*) @ 3000K
Lumens at Source	940 lm (1300 lm) @ 4000K
Luminous efficacy	74.2 lm/W @ 3000K 78 lm/W @ 4000K
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

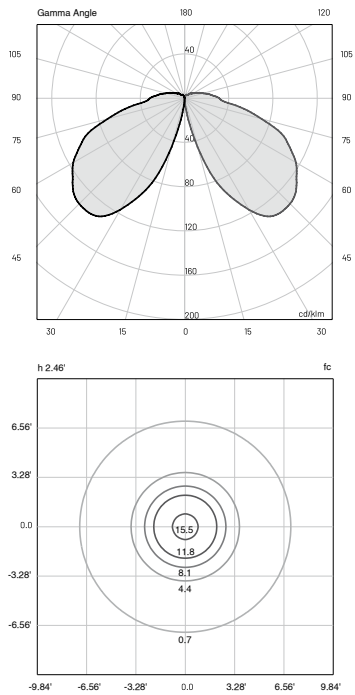

MATERIALS

Body	Inox AISI 316L
Diffuser	Extra clear polycarbonate
Finishing	Inox AISI 316L

ORDER CODE

TI 2 0	D	B 10 Z		
			Light color	N 4000K
				H 3000K
			Height	045 17.7" (45 cm)
				075 29.5" (75 cm)
				100 39.4" (100 cm)
				125 49.2" (125 cm)
			Example	TI 2 0 045 D H B 10 Z

AVAILABLE ACCESSORIES

Code	Description
00A400.01P	Anchor bolt
00A400	Root mounting kit
0404M004	Single connection IP68
0404M003	Loop-in loop-out IP68

