

Practical  
and  
formal.

titano

design by Landa R&D

designplan® 

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042



# titano

Titano is a 10W floor-standing luminaire available in different heights, easy to integrate and install in any outdoor environment. A simple shape for a practical and formal pole, robust and weatherproof. The light emission is diffusing, precise and uniform, also thanks to the extra-clear polycarbonate diffuser. Titano is available with AISI 316L stainless steel body or in the EN AW6060 extruded aluminum version with graphite or oxide finishing.





# titano



DIFFUSE

# | 10W



## TECHNICAL SPECIFICATIONS

	<b>DIFFUSE</b>
Source lamp	LED 10W
Total wattage	12W
Voltage	120-277VAC, 50-60 Hz
Control	On/Off • dimmable on request
Light color	3000K • 4000K • other colors on request
Delivered lumens *Lumens at Source	890 lm (1200 lm*) @ 3000K 940 lm (1300 lm*) @ 4000K
Luminous efficacy	74.2 lm/W @ 3000K 78 lm/W @ 4000K
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

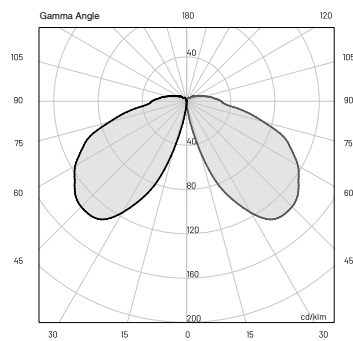


## MATERIALS

Body	Extruded aluminum EN AW6060
Diffuser	Extra clear polycarbonate
Finishing	Polyester powder paint

## ORDER CODE

TI 4 0	D	B	AZ	Finishing	L	Graphite	●
					V	Oxide	●
				Light color	N	4000K	
					H	3000K	
				Height	045	17.7" (45 cm)	
					075	29.5" (75 cm)	
					100	39.4" (100 cm)	
					125	49.2" (125 cm)	
Example					TI 4 0 045 D H B AZL		

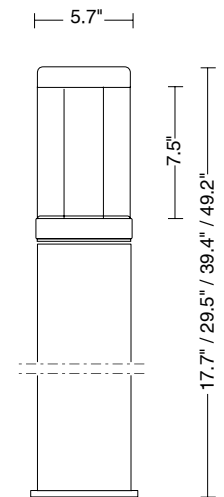

## AVAILABLE ACCESSORIES

Code	Description
00A400.01P	Anchor bolt for concrete
00A400	Root mounting kit for earth



# titano\_inox



DIFFUSE

# | 10W




## TECHNICAL SPECIFICATIONS

	DIFFUSE
Source lamp	LED 10W
Total wattage	12W
Voltage	120-277VAC, 50-60 Hz
Control	On/Off • dimmable on request
Light color	3000K • 4000K • other colors on request
Delivered lumens *Lumens at Source	890 lm (1200 lm*) @ 3000K 940 lm (1300 lm*) @ 4000K
Luminous efficacy	74.2 lm/W @ 3000K 78 lm/W @ 4000K
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

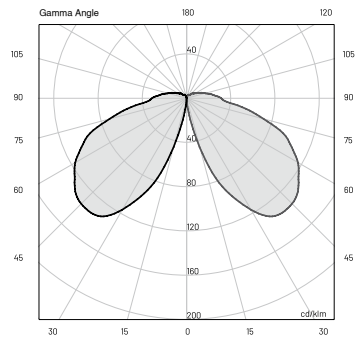


## MATERIALS

Body	Inox AISI 316L
Diffuser	Extra clear polycarbonate
Finishing	Inox AISI 316L 

## ORDER CODE

TI 2 0	D	B	A	Z	
					<i>Light color</i>
					<b>N</b> 4000K
					<b>H</b> 3000K
					<i>Height</i>
				<b>045</b>	17.7" (45 cm)
				<b>075</b>	29.5" (75 cm)
				<b>100</b>	39.4" (100 cm)
				<b>125</b>	49.2" (125 cm)
				<i>Example</i>	TI 2 0 <b>045</b> D H BAZ

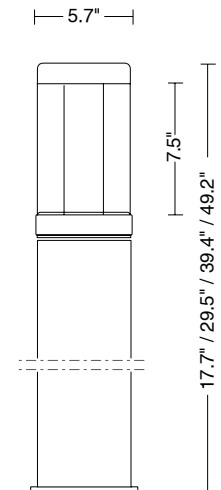

## AVAILABLE ACCESSORIES

Code	Description
00A400.01P	Anchor bolt for concrete
00A400	Root mounting kit for earth







