


TITANO is a robust, weatherproof bollard for outdoor installation that is available in a AISI 316L stainless steel body or EN AW6060 extruded aluminum version with 3 standard finishes and 4 different heights.



TECHNICAL DATA

Wattage	12W
Power Supply	Integral 120-277VAC
Construction	Body: Extruded Aluminum or Stainless Steel AISI 316L Lens: Extra Clear Polycarbonate
CCT	3000K, 4000K (other colors on request)
BUG Rating	B0-U3-G1 (3000K) B1-U3-G1 (4000K)
CRI	>90
Delivered Lumens	890 lm (3000K) 940 lm (4000K)
Efficacy	74.2 lm/W (3000K) 78.0 lm/W (4000K)
Optics	Diffuse
Finishes	Graphite, Gray or Oxide on Aluminum Inox Stainless Steel Version
Fixture Dimensions	Ø5.7" x 4 heights, See Below
Lumen Maintenance	L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions

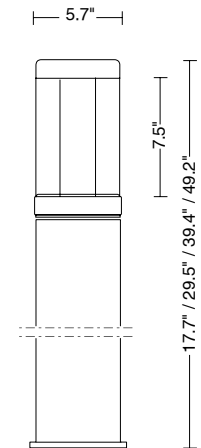

ORDERING INFORMATION

Example: LNTI40075DHBAZL.US. Accessories / Power Supplies ordered separately.

LNTI40		D		BAZ		US
Model No.	Height	Optics	CCT	Finish		
LNTI40	045 - 17.7" (45 cm) 075 - 29.5" (75 cm) 100 - 39.4" (100 cm) 125 - 49.2" (125 cm)	D - Diffuse	H - 3000K N - 4000K	L - Graphite H - Gray V - Oxide		US
LNTI20				Z - Stainless Steel		

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation

(included)

00A400.01P - Anchor Bolt

00A400 - Root Mounting Kit


0404M004 - Single connection IP68

0404M003 - Loop-in loop-out IP68

PHOTOMETRIC DATA

3000K


Maximum Candela = 161.7

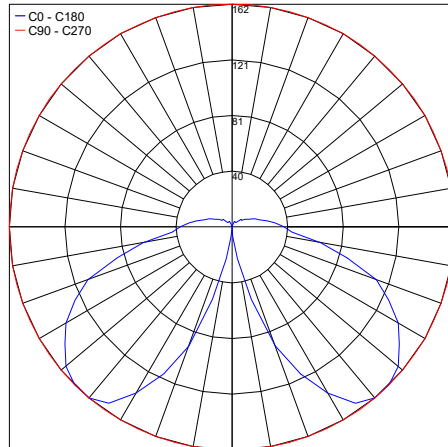

PHOTOMETRIC FILENAME : TITANO 30K - T140XXDHB10X.IES

4000K

Maximum Candela = 176.7

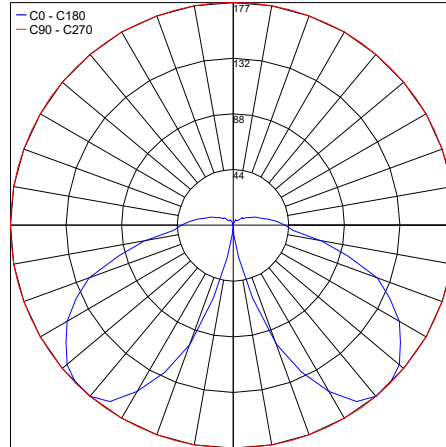

PHOTOMETRIC FILENAME : TITANO 40K - T140XXDHB10X.IES

Job Name/Date:

Fixture Type Designation: