


C2-STS is an LED spotlight for installation on magnetic track that dims using a button on the foot. It is larger than the C1 series, suitable for showcase lighting in museum and retail settings, and is 180° rotatable, 90° swiveling, with a single or triple lens, 5 color temperatures and 2 standard finishes.



TECHNICAL DATA

Wattage / Input	4.5W (12VDC)
Power Supply	Remote - See Magnetic Track Sheet
Dimming	On Board - Using a button on the foot
Construction	Body: Anodized Aluminum
CCT	2700K, 3000K, 3500K, 4000K, 5700K
CRI	>90
Delivered Lumens	260 lm (single lens, 3000K, 25°) 310 lm (triple lens, 3000K, 25°)
Efficacy	58 lm/W (single lens, 3000K, 25°) 69 lm/W (triple lens, 3000K, 25°)
Optics	Single Lens: 6°, 12°, 25°, 60°, 35°+15°, 50°+12° Triple Lens: 13°, 25°, 42°
Finishes	2 Standard, See Below Custom, RAL Available
Fixture Dimensions	Ø1.54" x 1.69" (head) 1.26" x 1.65" (base)
Lumen Maintenance	L80,B10 >50,000hrs
IP Rating	IP20

Fixture Dimensions

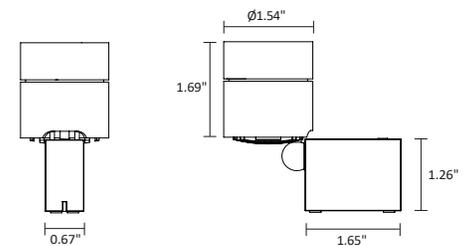


Single or Triple Lens Version

ORDERING INFORMATION

Example: C2-STS-40-25-GO. Accessories ordered separately.

C2-STS	-	-	-
Model No.	CCT	Optics	Finish
C2-STS	27 - 2700K	06 - 6° single lens	SW - Anodized Black
(A400023 - single)	30 - 3000K	12 - 12° single lens**	SI - Silver
(A400024 - triple)	35 - 3500K	25 - 25° single lens	<u>Custom (min. 10)</u>
	40 - 4000K	60 - 60° single lens	CH - Champagne
	57 - 5700K	35 - 35°+15° single lens**	HA - Hard Anodized
		50 - 12°+50° single lens**	GO - Gold
		T3 - 13° triple lens	BR - Mocha Bronze
		T5 - 25° triple lens	RAL - Custom RAL
		T4 - 42° triple lens	

** SEE ACCESSORIES PAGE - EXTRA CHARGE FOR 12° OR LENS WITH LIGHT DIFFUSION FOIL



Job Name/Date:

Fixture Type Designation:

ACCESSORIES



Honeycomb Grid
A000603




Anti-Glare Tube
A300171-__
SI - Silver
SW - Black
CH - Champagne (min 10)
HA - Hard Anodized (min 10)
GO - Gold (min 10)
BR - Mocha Bronze (min 10)
RAL - Custom RAL (min 10)



Inclined Tube
A300172-__
SI - Silver
SW - Black
CH - Champagne (min 10)
HA - Hard Anodized (min 10)
GO - Gold (min 10)
BR - Mocha Bronze (min 10)
RAL - Custom RAL (min 10)

See separate sheet
for Magnetic Track
and Magnetic Track
Holders.



****12° Lens**
A000520-S
Light Diffusion Foil and Lens Ring

****35°+15° Lens**
A000523-S
Light Diffusion Foil and Lens Ring

****12°+50° Lens**
A000524-S
Light Diffusion Foil and Lens Ring



Barn Door
A300148-__
SI - Silver
SW - Black
RAL - Custom RAL (min 10)






C2 Snoot (7°)
A300215-__
SI - Silver
SW - Black
CH - Champagne (min 10)
HA - Hard Anodized (min 10)
GO - Gold (min 10)
BR - Mocha Bronze (min 10)
RAL - Custom RAL (min 10) 10)

Job Name/Date:

Fixture Type Designation:




PHOTOMETRIC DATA - Single Lens

for light color 3000K | standard lens 25° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

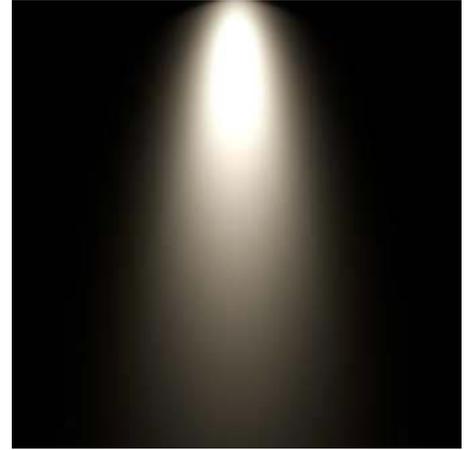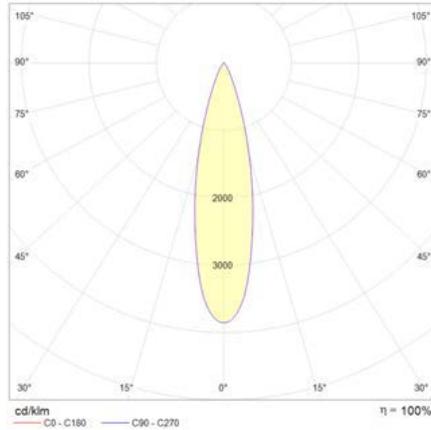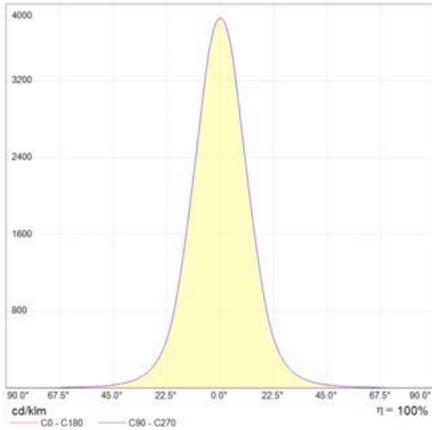

PHOTOMETRIC DATA - Triple Lens

for light color 3000K | standard lens 25° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

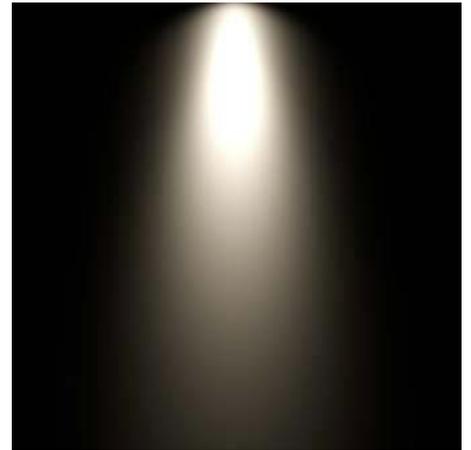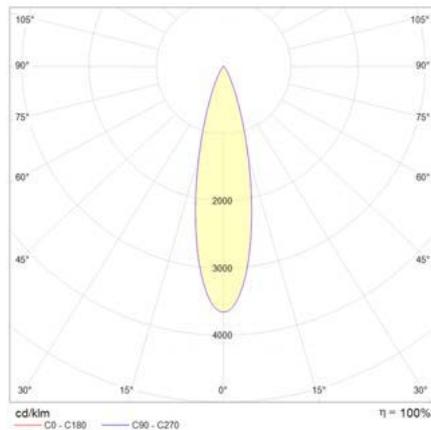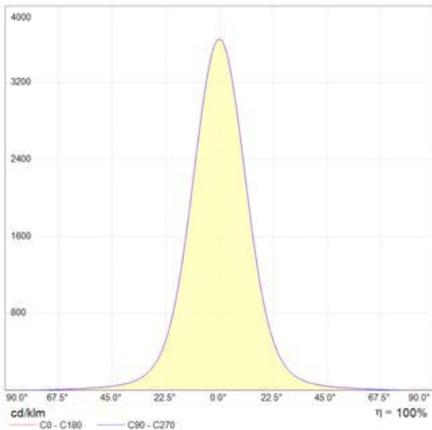

Job Name/Date:

Fixture Type Designation: