

Cobalt LR is a circular, surface-mounted, ligature-resistant luminaire, suitable for outdoor installation to illuminate external pathways at schools, hospitals, retail, and other commercial environments. It is available in 16W, 4000K as standard, and 2 finish options. ADA compliant. Emergency version available.




ADA Compliant

TECHNICAL DATA

Wattage	16W
Power Supply	Integral 120-277VAC
Construction	Body: High-Pressure Die-cast LM2 Aluminum Cover: Spun Aluminum and Polyester Non-yellowing Satin White (RAL 9016) Lens: Satin Polycarbonate
CCT	4000K
CRI	>80
BUG Rating	B1-U2-G1 B0-U1-G0 (Emergency version)
Delivered Lumens	2070 lm
Efficacy	129.4 lm/W
Optics	Diffuse
Finishes	Graphite polyester powder finish standard Silver on request
LED Source	LUX GUARD LED
Lumen Maintenance	100,000 hrs L80, B10
Fixture Dimensions	Ø14.0" x 4.5"
Fixture Weight	7.5 lbs 8.2 lbs (Emergency version)
IP Rating	IP66
Impact Resistance	IK10

Fixture Dimensions

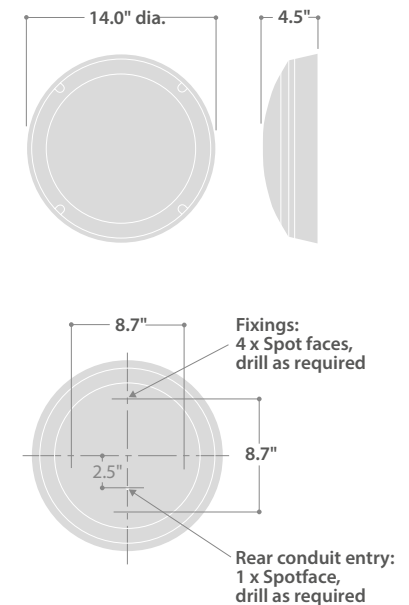

ORDERING INFORMATION

Example: CT16114.L.US. **Emergency versions available - use prefix ECT.**

CT16114	L		US
Model No.	Circuit	Finish Options	
CT16114 (Anti-Ligature)	L	SV3 - Silver Graphite - Standard (no code)	US

Emergency Versions available - use prefix ECT (not available on R - SmartScan version)

Job Name/Date:

Fixture Type Designation:


ACCESSORIES

16977
T30 pin Torx bit
(Suitable for magnetic bit holder)

PHOTOMETRIC DATA


Note all Photometry is 4000K

Plain

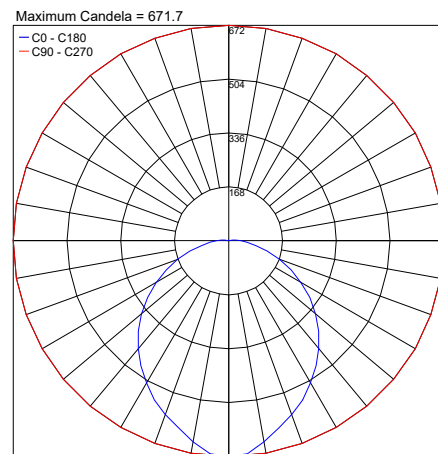

PHOTOMETRIC FILENAME : CT16114.IES

Emergency

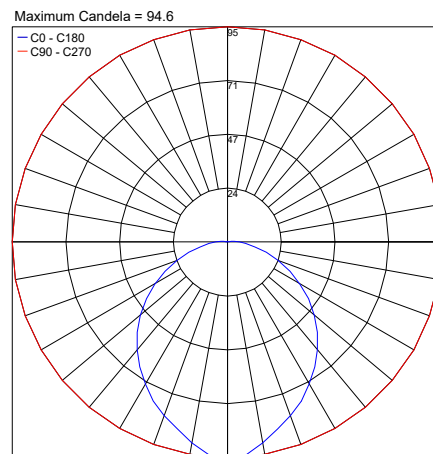

PHOTOMETRIC FILENAME : ECT16114.IES

Job Name/Date:

Fixture Type Designation: