

## CIRCULAR LIGATURE-RESISTANT SURFACE LED LUMINAIRES



### SPECIFICATION

- Strong high-pressure die-cast aluminum body and spun aluminum cover frame finished full polyester non-yellowing satin white (RAL 9016)
- Silver finish option
- Satin polycarbonate front cover
- Cover secured using tamper-resistant pin Torx screws (Requires T30 tool - see Accessory table below)
- Fitted with 4000K LEDs



### LED CHARACTERISTICS

CRI	80
COLOR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>90%
REPLACEABLE	YES
POWER FACTOR	>0.95
LL/CW	103.5

### RANGE

LED	CAT. No.	APPROX. lbs	CIRCUIT
16W	CT 16114	7.5 lbs	R/L/A


**CIRCUIT TYPE** - suffix catalogue number with:  
**L** - non-dimming (LED)  
 e.g. CT 16114L etc.

**SILVER OPTION** - add suffix **SV3** e.g. CT 16114LSV3 etc.

**EMERGENCY VERSION** - prefix catalogue number with:  
**ECT** - Emergency  
**TCT** - AutoTest  
**WCT** - SmartScan

e.g. ECT 16114L etc.  
 Add 0.66 lbs to weights listed


### DIMENSIONS

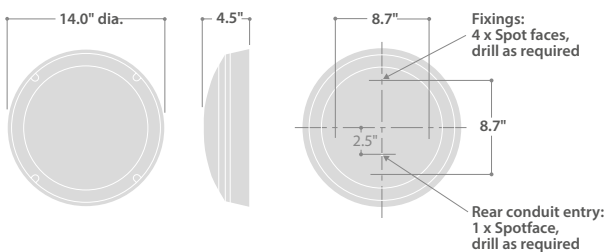

### ACCESSORY

DESCRIPTION	CAT. No.
T30 pin Torx bit (Suitable for magnetic bit holder)	KEY 16977

### PHOTOMETRIC GUIDE



Luminaire Lumen Output  
 16W = 2070lm