

POCKET EVO



datasheet


POCKET EVO is a fixed recessed luminaire for installation on indoor walls or ceilings, that produces an asymmetric ambient light. It is available in 3 color temperatures, and 5 standard finishes. It has a removable LED housing for setting up.




TECHNICAL DATA

Wattage	10W
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Stainless Steel Sheet (painted) Lens & Closing Diffuser: Frosted PMMA (Acrylic)
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U2-G1
Delivered Lumens	1000 lm (3000K)
Efficacy	100 lm/W (3000K)
Optics	Asymmetric
Finishes	5 Standard, See Below
Fixture Dimensions	3.70" x 3.43" x 16.26" h (Pocket Evo V) 9.61" x 3.43" x 16.26" h (Pocket Evo S)
Cutout Dimensions	3.70" x 9.53" (Pocket Evo V) 9.61" x 9.53" (Pocket Evo S)
Color Consistency	<3-Step MacAdam
IP Rating	IP44
Impact Resistance	IK06

Fixture Dimensions

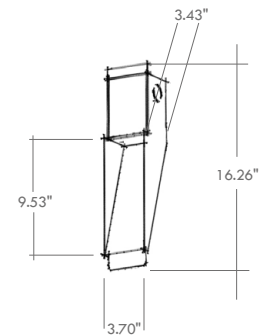

Pocket Evo-V

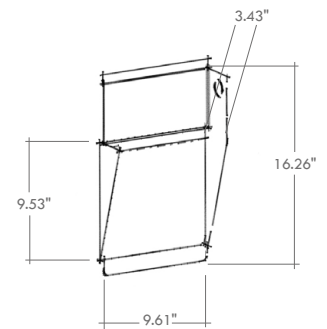

Pocket Evo-S



ORDERING INFORMATION

Example: LM05.104149.US.03.AS.BP. Accessories / Power Supplies ordered separately.

<input type="text"/>	<input type="text"/>	<input type="text" value="AS"/>	<input type="text"/>
Model No.	Finish	Optic	CCT
LM08.104149.US (Pocket Evo V)	01 - White	AS - Asymmetric	BC - 2700K
LM08.104297.US (Pocket Evo S)	02 - Black		BP - 3000K
	03 - Aluminum		BF - 4000K
	04 - Cor-ten		
	11 - Anthracite		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC


Part Number	Description	Input/Output	# of Fixtures
PPLT00680	ELV/TRIAC & 0-10V Dimming (100-0%)	120-277VAC to 24VDC, 20W, Class 2	1-1
PPLT00056	Non-Dim	120V-277AC to 24VDC, 26W, Class 2, IP66	1-2
PPLT00155	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-2
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-4
PPLT00627	ELV/TRIAC & 0-10V Dimming (100-0%)	120-277VAC to 24VDC, 96W, Class 2	1-7
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-8
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-8

For other power supply options consult factory.

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 831

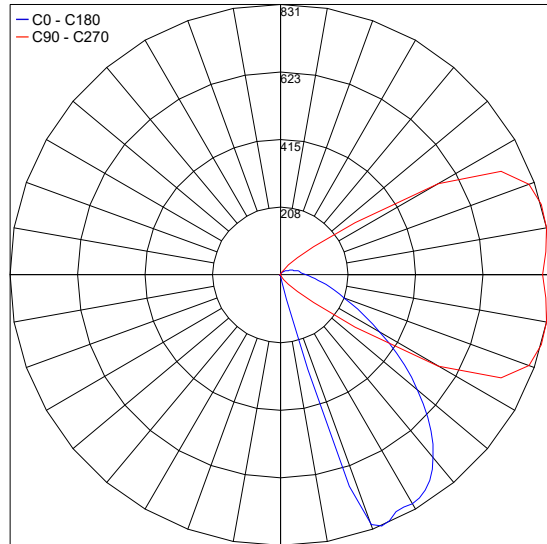

PHOTOMETRIC FILENAME : POCKET EVO-S LM08.104297.XX.AS 9.6W.IES

Maximum Candela = 519.4

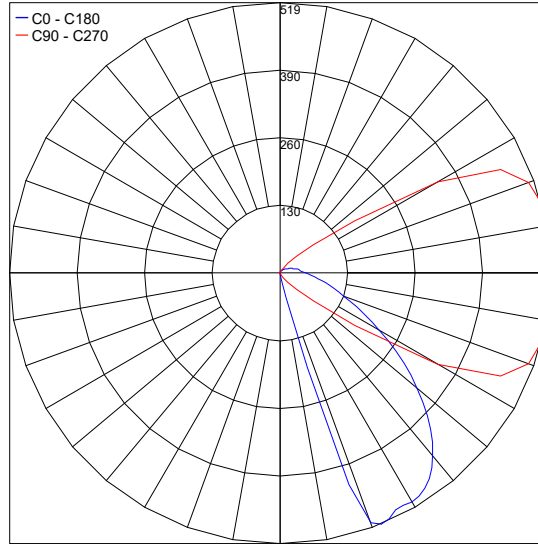

PHOTOMETRIC FILENAME : POCKET EVO-V LM08.104149.XX.AS 6W.IES

Job Name/Date:

Fixture Type Designation: