NINE W ATHENA



datasheet

Nine W Athena is a wall mounted minimalist lighting solution, using the Lutron Athena Wireless Node, that offers linear spread upper and diffused lower light emissions. It comes in 48" length and is available in 4 color temperatures and 4 standard finish options. Set screws on the side of the driver housing allows the fixture to pivot up for access to the driver.

Intertek



MADE IN THE U.S.A.

Fixture Dimensions
See Drawing on page 2.

ADA COMPLIANT

Athena Controls by Others

MOUNTING SCREWS BY OTHERS

TECHNICAL DATA

Wattage / Input	72W (120-277VAC)			
Power Supply	Integral (0-10V Dimming)			
Construction	Body: Extruded Aluminum			
ССТ	2700K, 3000K, 3500K, 4000K			
CRI	>90			
Delivered Lumens	Up - 1848 lm, Down - 1866 lm (4 ft, 3000K)			
Efficacy	Up: 25.6 lm/W, Down: 25.9 lm/W			
Optics	Up: Linear Spread, Down: Diffuse			
Finishes	4 Standard, See Below.			
Fixture Dimensions	See page 2.			
LED Source	Mid-Power LEDs			
IP Rating	IP20			
Connectors	See page 3			

ORDERING INFORMATION

Example: W90-A-4-01-30-TS-C-SC.

W90-A	- 4	-	-	-	- C	- SC
Model #	Length	Configuration	ССТ	Finish	Driver	Mounting
W90-A	4 - 4.0'	01 - Up & Down Dim Together 02 - Up & Down Dim Separate	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	02 - Black Suede 18 - Textured Bronze TS - Silver 11 - White Suede 99 - Custom	C - 120-277VAC, 0-10V Dimming	SC - Surface * Same finish as fixture - Other color on request

Job Name/Date: Fixture Type Designation:

P: 908-996-7710 F: 908-996-7042


NINE W ATHENA




datasheet

FIXTURE DIMENSIONS

48 inch version

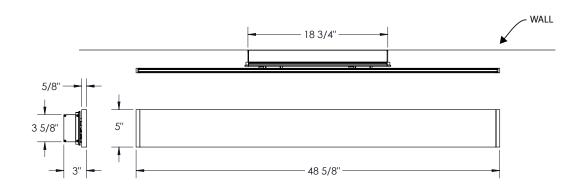

ATHENA NODE PLACEMENT

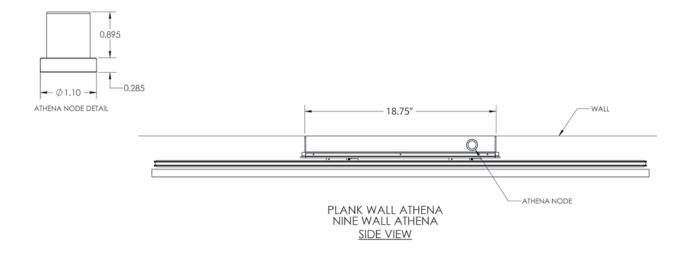

Job Name/Date:

Fixture Type Designation:


NINE W ATHENA



datasheet

PHOTOMETRIC DATA

Note: All photometry is 3000K



Job Name/Date: Fixture Type Designation:

P: 908-996-7710 F: 908-996-7042

3 of 3