

Nine W Athena is a wall mounted minimalist lighting solution, using the Lutron Athena Wireless Node, that offers linear spread upper and diffused lower light emissions. It comes in 48" length and is available in 4 color temperatures and 4 standard finish options. Set screws on the side of the driver housing allows the fixture to pivot up for access to the driver.



**MADE IN THE U.S.A.**

Fixture Dimensions  
See Drawing on page 2.

ADA COMPLIANT

**\*Athena Controls by Others**

**MOUNTING SCREWS  
BY OTHERS**

## TECHNICAL DATA

|                           |  |
|---------------------------|--|
| <b>Wattage / Input</b>    | 72W (120-277VAC)                           |
| <b>Power Supply</b>       | Integral (0-10V Dimming)                   |
| <b>Construction</b>       | Body: Extruded Aluminum                    |
| <b>CCT</b>                | 2700K, 3000K, 3500K, 4000K                 |
| <b>CRI</b>                | >90  |
| <b>Delivered Lumens</b>   | Up - 1848 lm, Down - 1866 lm (4 ft, 3000K) |
| <b>Efficacy</b>           | Up: 25.6 lm/W, Down: 25.9 lm/W             |
| <b>Optics</b>             | Up: Linear Spread, Down: Diffuse           |
| <b>Finishes</b>           | 4 Standard, See Below.                     |
| <b>Fixture Dimensions</b> | See page 2.                                |
| <b>LED Source</b>         | Mid-Power LEDs                             |
| <b>IP Rating</b>          | IP20                                       |
| <b>Connectors</b>         | See page 3                                 |

## ORDERING INFORMATION

Example: W90-A-4-01-30-TS-C-SC.


|         |          |                                |            |                      |                                  |   |   |   |   |    |
|---------|----------|--------------------------------|------------|----------------------|----------------------------------|---|---|---|---|----|
| W90-A   | -        | 4                              | -          |                      | -                                |   | - | C | - | SC |
| Model # | Length   | Configuration                  | CCT        | Finish               | Driver                           | Mounting  |   |   |   |    |
| W90-A   | 4 - 4.0' | 01 - Up & Down<br>Dim Together | 27 - 2700K | 02 - Black Suede     | C - 120-277VAC,<br>0-10V Dimming | SC - Surface  |   |   |   |    |
|         |          |                                | 30 - 3000K | 18 - Textured Bronze |                                  | * Same finish as<br>fixture - Other<br>color on request |   |   |   |    |
|         |          | 02 - Up & Down<br>Dim Separate | 35 - 3500K | TS - Silver          |                                  |   |   |   |   |    |
|         |          |                                | 40 - 4000K | 11 - White Suede     |                                  |   |   |   |   |    |
|         |          |                                |            | 99 - Custom          |                                  |   |   |   |   |    |

Job Name/Date:



Fixture Type Designation:

## FIXTURE DIMENSIONS

### 48 inch version

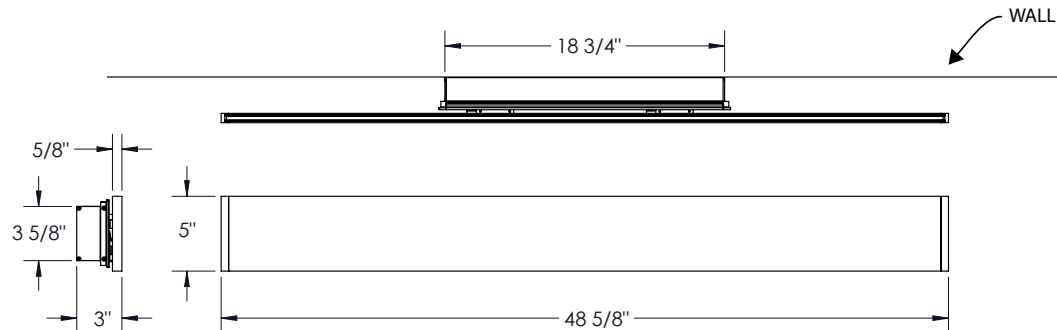

## ATHENA NODE PLACEMENT

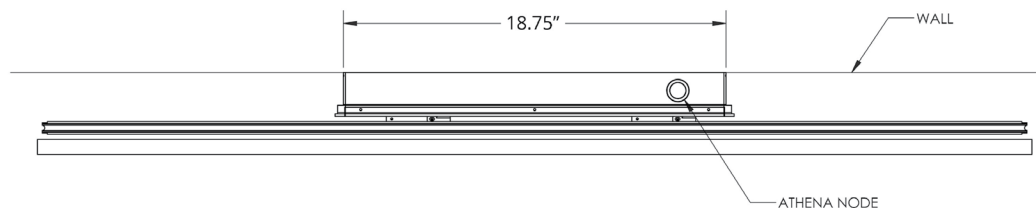

PLANK WALL ATHENA  
NINE WALL ATHENA  
SIDE VIEW


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA

*Note: All photometry is 3000K*

Maximum Candela = 913

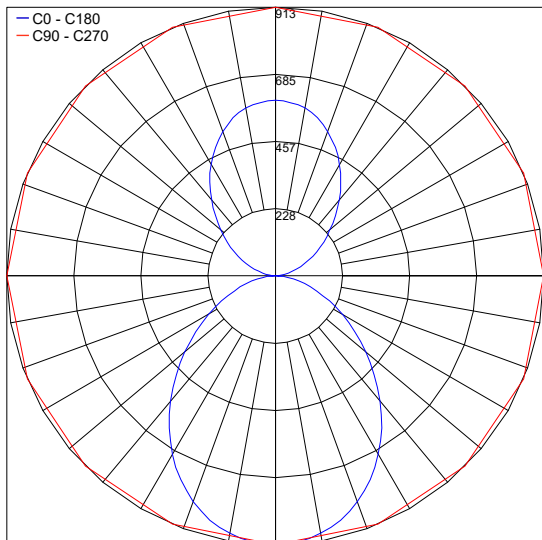

Job Name/Date:

Fixture Type Designation: