

# PLANK ATHENA

Plank Athena is an elegant lighting solution designed for the minimalist, using the Lutron Athena Wireless Node. With a 0.625" body and wooden side panels, Plank offers linear spread upper emission and diffused lower. It has adjustable integral 120-277VAC, 0-10V dimming drivers which make for easy integration into office, residential and commercial environments.



White Oak Maple Cherry Walnut  
Please note: Wood grain and colors may vary.

## TECHNICAL DATA

|                           |  |
|---------------------------|--|
| <b>Wattage / Input</b>    | 72W (4 ft) (120-277VAC)  |
| <b>Power Supply</b>       | Integral (0-10V Dimming)   |
| <b>Construction</b>       | Body: Extruded Aluminum<br>Side Panels: Wood - available white oak, maple, cherry or walnut (contact factory for wood options)<br>Mounting: Aircraft Cable |
| <b>CCT</b>                | 2700K, 3000K, 3500K, 4000K   |
| <b>CRI</b>                | >90  |
| <b>Delivered Lumens</b>   | Up - 1848 lm, Down - 1866 lm (4 ft, 3000K)   |
| <b>Efficacy</b>           | Up: 25.6 lm/W, Down: 25.9 lm/W   |
| <b>Optics</b>             | Up: Linear Spread, Down: Diffuse   |
| <b>Finishes</b>           | 4 Standard, See Below.   |
| <b>Fixture Dimensions</b> | See page 2.  |
| <b>IP Rating</b>          | IP20   |

**MADE IN THE U.S.A.**

Fixture Dimensions  
See Chart and Drawing on page 2.

**\*Athena Controls by Others\***

## ORDERING INFORMATION

Example: P90-A-4-30-P-10-M-C-SW.

|       |   |   |   |  |   |   |   |  |   |  |   |   |   |  |
|-------|---|---|---|--|---|---|---|--|---|--|---|---|---|--|
| P90-A | - | 4 | - |  | - | P | - |  | - |  | - | C | - |  |
|-------|---|---|---|--|---|---|---|--|---|--|---|---|---|--|

| Model No. | Length     | CCT        | Body        | Finish           | Wood   | Driver                           | Canopy                                    |
|-----------|------------|------------|-------------|------------------|--|----------------------------------|---|
| P90-A     | 4 - 4 foot | 27 - 2700K | P - Pendant | 02 - Black Suede | O - White Oak<br>M - Maple<br>C - Cherry<br>W - Walnut | C - 120-277VAC,<br>0-10V Dimming | RC - Recessed*                            |
|           |            | 30 - 3000K |             | 18 - Tex. Bronze |  |                                  | SC - Surface*                             |
|           |            | 35 - 3500K |             | TS - Silver      |  |                                  | RW - Recessed,<br>White                   |
|           |            | 40 - 4000K |             | 11 - White Suede |  |                                  | SW - Surface,<br>White                    |
|           |            |            |             | 99 - Custom      |  |                                  | AS - Surface<br>Acoustical Tile*          |
|           |            |            |             |                  |  |                                  | AW - Surface<br>Acoustical Tile,<br>White |


**NOTE:** AS & AW utilize a rosette mounting pattern to allow direct mounting to a junction box that will hold a minimum of 50 lbs.

\* Same finish as fixture  
- Other color on request -

Job Name/Date:




Fixture Type Designation:

## FIXTURE DIMENSIONS

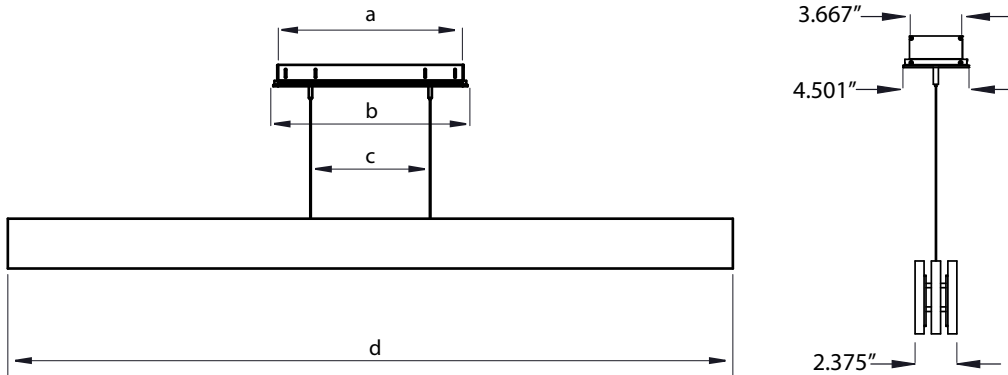

| Dimensions | 4 Ft. |
|------------|-------|
| a          | 18.7" |
| b          | 19.5" |
| c          | 16"   |
| d          | 48.7" |

## ATHENA NODE PLACEMENT

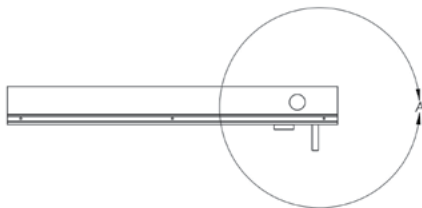

LAMBDA ATHENA  
 HALF PINT ATHENA  
 NINE ATHENA  
 PLANK ATHENA  
 SIDE VIEW


Job Name/Date:

Fixture Type Designation:

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 913

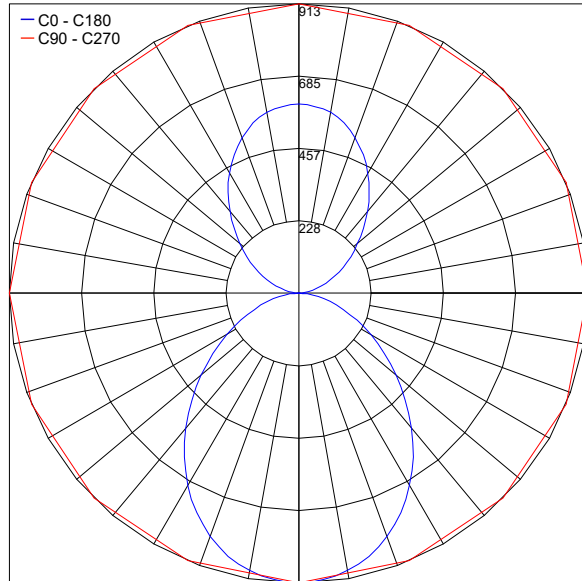

Job Name/Date:

Fixture Type Designation: