

ROUND EVO 1


Round Evo is a round spotlight for outdoor installation on floors, walls or ceilings using adjustable stainless steel supports and accessories. Round Evo 1 has a diameter of 1.8", offered in 3 color temperature with 4 optics options, and 5 standard finishes.

TECHNICAL DATA

Wattage / Input	2.2W
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Anticorodal Aluminum (<i>Anodizing Treatment</i>) Lens: Tempered, Extra Clear Glass Cable Length: 1.64'
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U1-G0 (3000K)
Delivered Lumens	214 lm (3000K)
Efficacy	97.3 lm/W (3000K)
Optics	8°, 12°, 25°, 40°
Finishes	5 Standard, See Below
Fixture Dimensions	Ø1.77" x 2.95" h
Color Consistency	<3-Step MacAdam
IP Rating	IP66
Impact Resistance	IK08



Fixture Dimensions



ORDERING INFORMATION

Example: LM03.103807.US.01.SP.BP. Accessories / Power Supplies ordered separately.

LM03.103807.US			
Model No.	Finish	Optic	CCT
LM03.103807.US (Round Evo 1.0)	01 - White 02 - Black 03 - Aluminum 04 - Cor-ten 11 - Anthracite	SS - 8° SP - 12° MD - 25° FL - 40°	BC - 2700K BP - 3000K BF - 4000K

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-36

SUGGESTED POWER SUPPLIES

Remote 24VDC Driver in NEMA Enclosure - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-34

For other power supply options consult factory.

ACCESSORIES



Spike for furniture or ground installation

LM20.104312

1.73" x 11.26" h



Clasp for furniture installation

LM20.104318

2.76" x 1.97"

Job Name/Date:

Fixture Type Designation:


ROUND EVO 1

PHOTOMETRIC DATA

Note: All photometric data is 3000K

12°


Maximum Candela = 3316.2

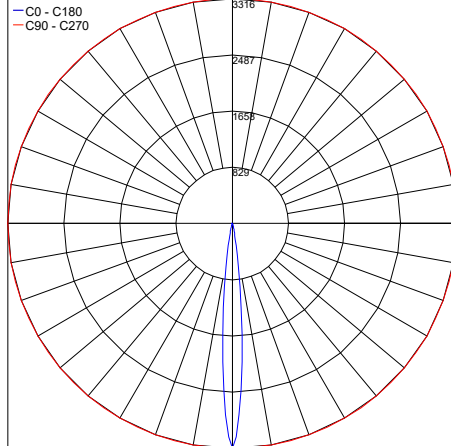

PHOTOMETRIC FILENAME : ROUND EVO 1 30K 12° - LM03.103807.XX.SP.BP.IES

25°


Maximum Candela = 724.5

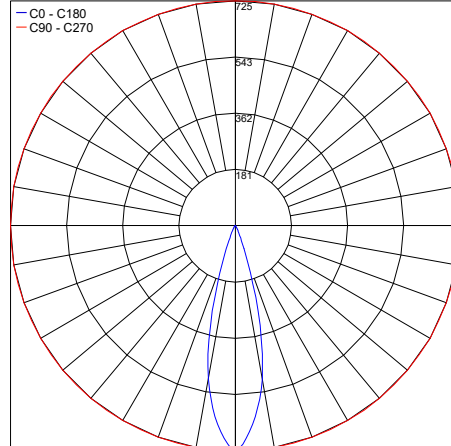

PHOTOMETRIC FILENAME : ROUND EVO 1 30K 25° - LM03.103807.XX.MD.BP.IES

40°

Maximum Candela = 376.5

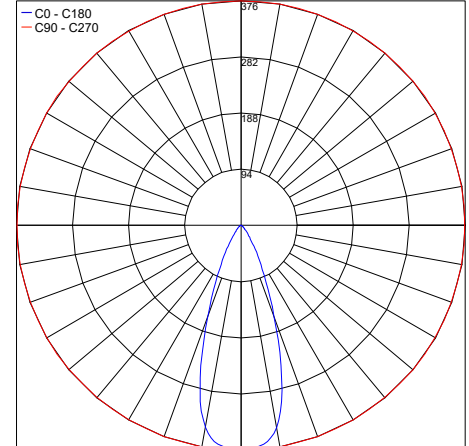

PHOTOMETRIC FILENAME : ROUND EVO 1 30K 40° - LM03.103807.XX.FL.BP.IES

Job Name/Date:

Fixture Type Designation: