

ROUND EVO 3


Round Evo is a round spotlight for outdoor installation on floors, walls or ceilings using adjustable stainless steel supports and accessories. Round Evo 3 has a diameter of 3.4", offered in 3 color temperature with 3 optics options, and 5 standard finishes.



TECHNICAL DATA

Wattage / Input	12W
Power Supply	Remote, not included. Consult Factory.
Construction	Body: Anticorodal Aluminum (<i>Anodizing Treatment</i>) Lens: Tempered, Extra Clear Glass Cable Length: 1.64'
CCT	2700K, 3000K, 4000K
BUG Rating	B1-U1-G0 (12°, 3000K) B2-U1-G0 (25° / 40°, 3000K)
Delivered Lumens	2066 lm (3000K)
Efficacy	172.2 lm/W (3000K)
Optics	12°, 25°, 40°
Finishes	5 Standard, See Below
Fixture Dimensions	Ø3.35" x 7.48" h
Color Consistency	<3-Step MacAdam
IP Rating	IP66
Impact Resistance	IK08

Fixture Dimensions

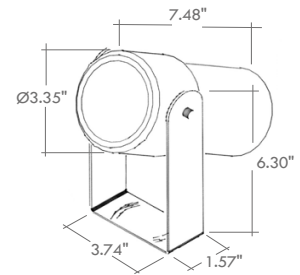

ORDERING INFORMATION

Example: LM03.103809.US.01.FL.BC Accessories / Power Supplies ordered separately.

LM03.103809.US	.		.		.	
----------------	---	--	---	--	---	--

Model No.	Finish	Optic	CCT
LM03.103809.US	01 - White	SP - 12°	BC - 2700K
	02 - Black	MD - 25°	BP - 3000K
	03 - Aluminum	FL - 40°	BF - 4000K
	04 - Cor-ten		
	11 - Anthracite		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

Consult Factory

ACCESSORIES



45° Screen
LM20.104162
(for Round Evo 3.0)
Ø3.35" x 3.74" h



Cylindrical Screen
LM20.104164
(for Round Evo 3.0)
Ø3.35" x 3.74" h



Accessory Frame
LM20.104166
(for Round Evo 3.0)
Ø3.35"



Refractor for the elliptical distribution
LM20.104302
(for Round Evo 3.0)
Ø3.35"



Honeycomb Baffle
LM20.104168
(for Round Evo 3.0)
Ø3.35"



Protection Grid
LM20.104308
(for Round Evo 3.0)
Ø3.35"



Spike for ground installation
LM20.104314
(for Round Evo 3.0)
2.95" x 15.75" h



Clasp for furniture installation
LM20.104320
(for Round Evo 3.0)
3.94" x 1.97"

Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note: All photometric data is 3000K

12°

Maximum Candela = 8192

— C0 - C180
— C90 - C270

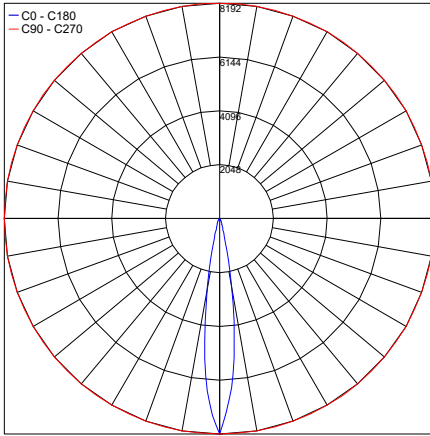


PHOTOMETRIC FILENAME : ROUND EVO 3 30K 12° - LM03.103809.XX.SP.XX.IES

25°

Maximum Candela = 6315.2

— C0 - C180
— C90 - C270

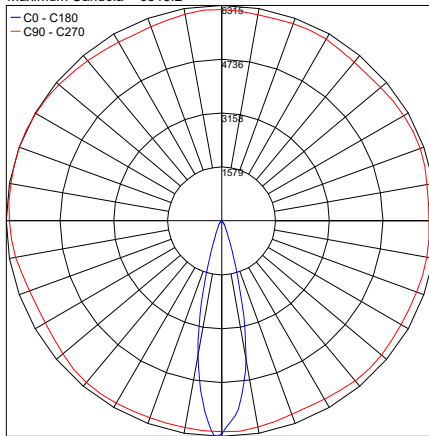


PHOTOMETRIC FILENAME : ROUND EVO 3 30K 25° - LM03.103809.XX.MD.XX.IES

40°

Maximum Candela = 2985.4

— C0 - C180
— C90 - C270

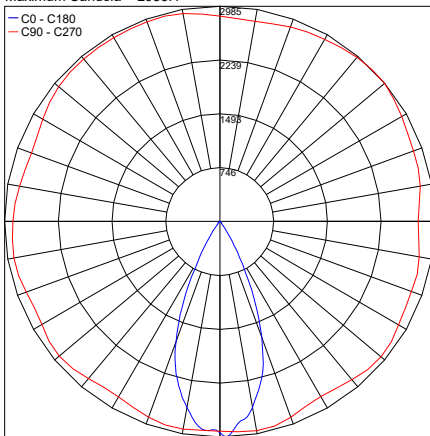

PHOTOMETRIC FILENAME : ROUND EVO 3 30K 40° - LM03.103809.XX.FL.XX.IES

Job Name/Date:

Fixture Type Designation: