

CYLINDER MEDIUM COB


Cylinder Medium COB is a 16W, surface-mounted, cylindrical downlight suitable for outdoor ceiling installation. It is available in 3000K or 4000K, with 3 optical options, and 2 standard finishes.



TECHNICAL DATA

Wattage / Input	16W (120VAC)
Power Supply	Integral
Construction	Body/Frame: Extruded Copper-Free Aluminum Lens: Tempered, Safety Glass
CCT	3000K, 4000K
Delivered Lumens	1813 lm (35°, 3000K)
Efficacy	113.3 lm/W
Optics	14°, 35°, 55°
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	Ø5.47" x 8.66" h
Fixture Weight	8.82 lbs
LED Source	1 COB CREE "CXB 1512" LED
IP Rating	IP66
IK Rating	IK09

Fixture Dimensions

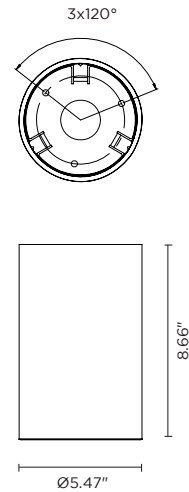

ORDERING INFORMATION

Example: 701203P-30K-35-TG

701203P	-		-		
---------	---	--	---	--	--

Model No.	CCT	Optics	Finish
701203P	30K - 3000K 40K - 4000K	14 - 14° 35 - 35° 55 - 55°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note all Photometry is 3000K


Maximum Candela = 5739.7

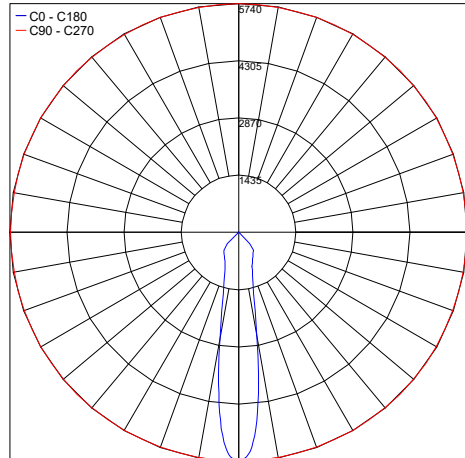

PHOTOMETRIC FILENAME : CYLINDER MEDIUM COB 701203_14° 3000K.IES

14°


Maximum Candela = 2617.8

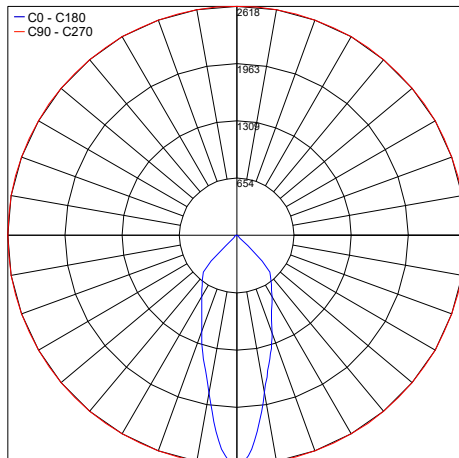

PHOTOMETRIC FILENAME : CYLINDER MEDIUM COB 701203_35° 3000K.IES

35°

Maximum Candela = 2248.3

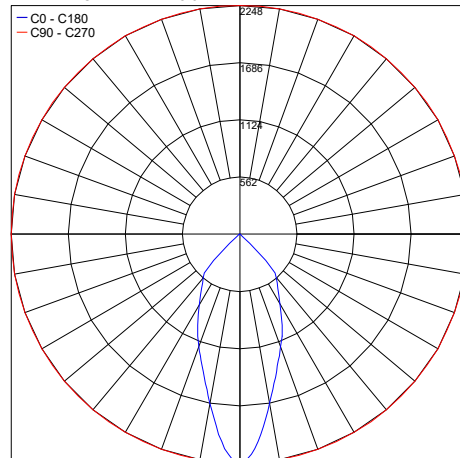

PHOTOMETRIC FILENAME : CYLINDER MEDIUM COB 701203_55° 3000K.IES

55°

Job Name/Date:

Fixture Type Designation: